

# SMART Transmitter Power Supply

## KFD2-STC4-Ex1.20

**SIL 3**

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Input 2-wire and 3-wire SMART transmitters and 2-wire SMART current sources
- Signal splitter (1 input and 2 outputs)
- Dual output 0/4 mA ... 20 mA
- Terminal blocks with test sockets
- Up to SIL 3 acc. to IEC 61508

Input 0/4 mA ... 20 mA 2 x Output 0/4 mA ... 20 mA



### Function

This isolated barrier is used for intrinsic safety applications. The device supplies 2-wire and 3-wire SMART transmitters in a hazardous area, and can also be used with 2-wire SMART current sources. It transfers the analog input signal to the safe area as an isolated current value. Digital signals may be superimposed on the input signal in the hazardous or safe area and are transferred bi-directionally. If the HART communication resistance in the loop is too low, the internal resistance of 250 Ω between terminals 8 and 9 can be used. Test sockets for the connection of HART communicators are integrated into the terminals of the device.

### Technical Data

#### General specifications

Signal type Analog input

#### Functional safety related parameters

Safety Integrity Level (SIL) SIL 3

#### Supply

Connection Power Rail or terminals 14+, 15-

Rated voltage  $U_r$  20 ... 35 V DC

Ripple within the supply tolerance

Power dissipation 1.8 W

Power consumption 2.4 W

#### Input

Connection side field side

Connection terminals 1+, 2-, 3 or 5-, 6+

Input signal 0/4 ... 20 mA

Open circuit voltage/short-circuit current terminals 1+, 3-: 22.7 V / 38 mA

Voltage drop terminals 5, 6 : ≤ 2.4 V at 20 mA

Input resistance terminals 2-, 3: max. 76 Ω  
terminals 1+, 3: max. 500 Ω (250 Ω load)

Available voltage terminals 1+, 3: ≥ 16 V at 20 mA

#### Output

Connection side control side

Connection terminals 7-, 8+,9; 10-, 11+,12

Load 0 ... 550 Ω at 20 mA

Output signal 0/4 ... 20 mA (overload > 25 mA)

Ripple max. 50 μA<sub>rms</sub>

#### Transfer characteristics

Release date: 2020-04-06 Date of issue: 2020-04-06 Filename: 283674\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

## Technical Data

|  |  |  |
|--|--|--|
| Deviation  | at 20 °C (68 °F), 0/4 ... 20 mA<br>≤ 10 µA incl. calibration, linearity, hysteresis, loads and fluctuations of supply voltage  |  |
| Influence of ambient temperature                               | 0.25 µA/K  |  |
| Frequency range  | field side into the control side: bandwidth with 0.5 V <sub>pp</sub> signal 0 ... 7.5 kHz (-3 dB)<br>control side into the field side: bandwidth with 0.5 V <sub>pp</sub> signal 0.3 ... 7.5 kHz (-3 dB) |  |
| Settling time  | 200 µs   |  |
| Rise time/fall time  | 20 µs  |  |
| <b>Galvanic isolation</b>                                      |  |  |
| Output/power supply  | functional insulation, rated insulation voltage 50 V AC  |  |
| Output/Output  | functional insulation, rated insulation voltage 50 V AC  |  |
| <b>Indicators/settings</b>                                     |  |  |
| Display elements   | LED  |  |
| Labeling   | space for labeling at the front  |  |
| <b>Directive conformity</b>                                    |  |  |
| Electromagnetic compatibility                                  |  |  |
| Directive 2014/30/EU   | EN 61326-1:2013 (industrial locations)   |  |
| <b>Conformity</b>  |  |  |
| Electromagnetic compatibility                                  | NE 21:2011   |  |
| Degree of protection   | IEC 60529:2001   |  |
| Protection against electrical shock                            | UL 61010-1:2012  |  |
| <b>Ambient conditions</b>                                      |  |  |
| Ambient temperature  | -20 ... 60 °C (-4 ... 140 °F)  |  |
| <b>Mechanical specifications</b>                               |  |  |
| Degree of protection   | IP20   |  |
| Connection   | screw terminals  |  |
| Mass   | approx. 200 g  |  |
| Dimensions   | 20 x 124 x 115 mm (0.8 x 4.9 x 4.5 inch) , housing type B2   |  |
| Mounting   | on 35 mm DIN mounting rail acc. to EN 60715:2001   |  |
| <b>Data for application in connection with hazardous areas</b> |  |  |
| EU-type examination certificate                                | BAS 99 ATEX 7060 X   |  |
| Marking  | Ⓜ II (1)G [Ex ia Ga] IIC , Ⓜ II (1)D [Ex ia Da] IIIC , Ⓜ I (M1) [Ex ia Ma] I   |  |
| Input  | [Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I  |  |
| Supply   |  |  |
| Maximum safe voltage   | U <sub>m</sub>   | 250 V (Attention! The rated voltage can be lower.) |
| Equipment  |  |  |
| Voltage U <sub>o</sub>   | 25.4 V   |  |
| Current I <sub>o</sub>   | 86.8 mA  |  |
| Power P <sub>o</sub>   | 551 mW   |  |
| Internal capacitance C <sub>i</sub>                            | 12 nF  |  |
| Internal inductance L <sub>i</sub>                             | 0 mH   |  |
| Equipment  |  |  |
| Current I <sub>o</sub> /Current I <sub>i</sub>                 | 74 mA / 115 mA   |  |
| Current I <sub>i</sub>   | 115 mA   |  |
| Voltage U <sub>o</sub>   | 3.5 V  |  |
| Current I <sub>o</sub>   | 74 mA  |  |
| Power P <sub>o</sub>   | 64 mW  |  |
| Equipment  |  |  |
| Voltage U <sub>i</sub>   | 30 V   |  |
| Current I <sub>i</sub>   | 115 mA   |  |
| Voltage U <sub>o</sub>   | 25.4 V   |  |
| Current I <sub>o</sub>   | 115 mA   |  |
| Power P <sub>o</sub>   | 584 mW   |  |
| Equipment  |  |  |
| Voltage U <sub>i</sub>   | 30 V   |  |

Release date: 2020-04-06 Date of issue: 2020-04-06 Filename: 283674\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.comUSA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.comGermany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com


**PEPPERL+FUCHS**

**Technical Data**

|                                |       |  |
|--------------------------------|-------|--|
| Current $I_i$                  |       | 115 mA   |
| Voltage $U_o$                  |       | 8.7 V  |
| Current $I_o$                  |       | 0 mA   |
| <b>Output</b>                  |       |  |
| Maximum safe voltage           | $U_m$ | 250 V (Attention! The rated voltage can be lower.)   |
| Certificate                    |       | TÜV 99 ATEX 1499 X   |
| Marking                        |       | Ⓜ II 3G Ex nA II T4 [device in zone 2]   |
| <b>Galvanic isolation</b>      |       |  |
| Input/Output                   |       | safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V  |
| Input/power supply             |       | safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V  |
| <b>Directive conformity</b>    |       |  |
| Directive 2014/34/EU           |       | EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010   |
| <b>International approvals</b> |       |  |
| UL approval                    |       |  |
| Control drawing                |       | 116-0428 (cULus)   |
| IECEx approval                 |       | IECEx BAS 04.0016X<br>IECEx CML 15.0055X   |
| Approved for                   |       | [Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I<br>Ex nA IIC T4 Gc   |
| <b>General information</b>     |       |  |
| Note                           |       | Both output loads must be connected to ensure complete and correct operation within the technical specification.<br>Open circuit of one of the two outputs will not affect the connected output, but would result in a loss of transmitter supply voltage of up to 0.7 Volt. |
| Supplementary information      |       | Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .  |

**Assembly**


Front view

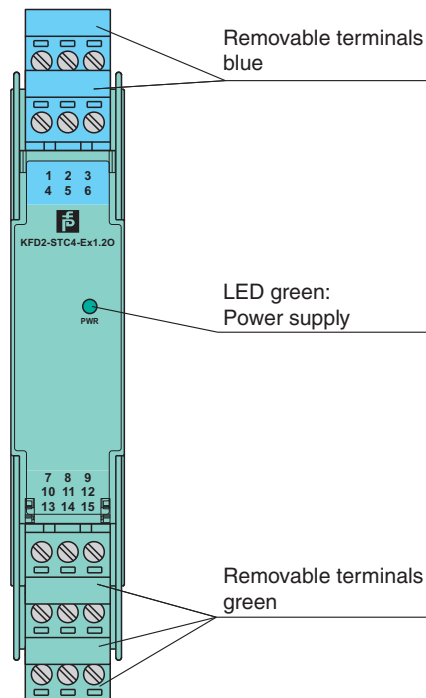

Release date: 2020-04-06 Date of issue: 2020-04-06 Filename: 283674\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Connection

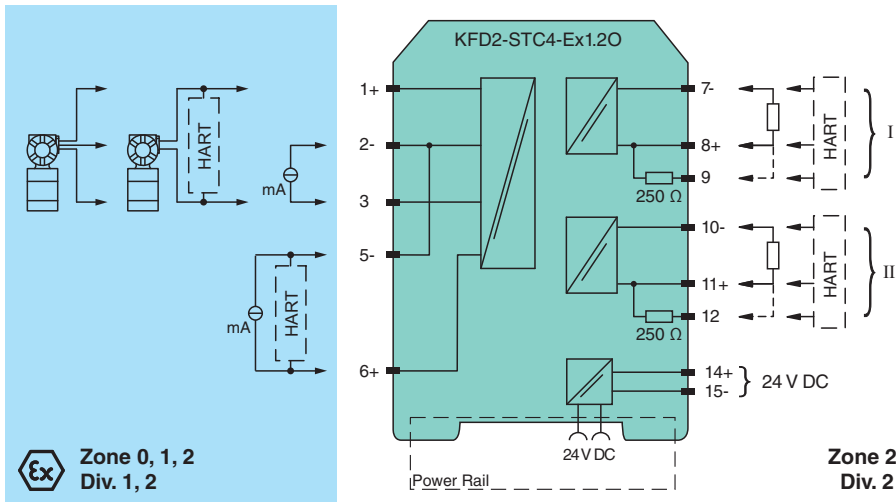

Accessories

|  |                         |   |
|--|-------------------------|---|
|  | <b>KFD2-EB2</b>         | Power Feed Module   |
|  | <b>UPR-03</b>           | Universal Power Rail with end caps and cover, 3 conductors, length: 2 m       |
|  | <b>UPR-03-M</b>         | Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m     |
|  | <b>UPR-03-S</b>         | Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m     |
|  | <b>K-DUCT-BU</b>        |   |
|  | <b>K-DUCT-BU-UPR-03</b> | Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side blue |

## Application

The device supports the following SMART protocols:

- HART
- BRAIN
- Foxboro

## Configuration

### Configuration active output (source)

If only one output of the two outputs is used, a plug-in jumper have to be set as follows.

