

**Features**

- Maintenance indication via LEDs
- Status indication input
- Status indication to control via solid state relay
- Mounting on base module, pluggable

**Function**

The maintenance status module indicates that the protective effect of one of the monitored protection modules is decreasing and that the protection module is at the end of its service life.

The status indication is transmitted to the control via the status indication output. The status indication output is performed via a solid state relay.

The device switches if a maintenance signal is detected on one of the monitored protection modules.

The device has LEDs for the power status indication and for the maintenance status indication.

The device is plugged onto the base module and, together with the base module, forms the evaluation unit.

The device can be replaced without tools by a locking lever.

**Assembly**

Front view

Connection  
Status indication output




LED yellow:  
Maintenance

LED green:  
Power supply



**Connection**

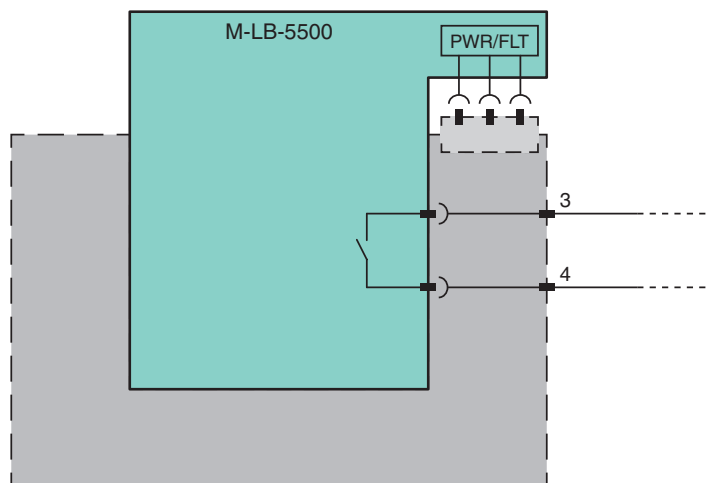

Zone 2

Release date 2019-04-17 14:26 Date of issue 2019-04-17 269101\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

<b>General specifications</b>	
Signal type	Digital Input
<b>Supply</b>	
Connection	via Universal Power Rail M-UPR-03-S
Nominal voltage	see power feed module M-LB-5300
<b>Electrical specifications</b>	
Power dissipation	0.25 W
<b>Input</b>	
Connection side	field side
Status indication	maintenance signal via Universal Power Rail M-UPR-03-S
<b>Output</b>	
Connection side	control side
Output type	
Additional functions	
Connection	terminals 3+, 4-; 3-, 4+
Output rated operating current	0.5 A
Output voltage	30 V AC/DC
Status indication	maintenance signal via solid state relay (NO contact) to the control system
Contact loading	30 V AC/0.5 A/cos $\phi$ 0.7; 30 V DC/0.5 A resistive load
Energized/De-energized delay	< 1 s / < 1 s
<b>Galvanic isolation</b>	
Output/power supply	basic insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
<b>Indicators/settings</b>	
Display elements	LED PWR (power supply), green LED LED CHK (maintenance signal), yellow LED
<b>Directive conformity</b>	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
<b>Conformity</b>	
Degree of protection	IEC 60529:2013
<b>Ambient conditions</b>	
Ambient temperature	-40 ... 60 °C (-40 ... 140 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Relative humidity	max. 95 % , without condensation
<b>Mechanical specifications</b>	
Degree of protection	IP20
Mass	approx. 20 g
Dimensions	6.2 x 77 x 79 mm
Mounting	pluggable in base module for mounting on 35 mm DIN mounting rail
<b>Data for application in connection with hazardous areas</b>	
Certificate	BVS 17 ATEX E 070 X
Marking	⊕ II 3G Ex ec IIC T4 Gc
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-7:2015
<b>International approvals</b>	
IECEX approval	
IECEX certificate	IECEX BVS 17.0061X
IECEX marking	Ex ec IIC T4 Gc
<b>General information</b>	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .
<b>Accessories</b>	
Designation	system components: - base module with screw terminals M-LB-5000 - base module with spring terminals M-LB-5000.SP - protection module M-LB-XX-52XX - power feed module M-LB-5300 - fault status module M-LB-5400 - maintenance status module M-LB-5500 - universal power rail M-UPR-03-S - separation wall M-UPR-I

Release date 2019-04-17 14:26 Date of issue 2019-04-17 269101\_eng.xml