

Product availability : Stock - Normally stocked in distribution facility



Price\* : 5240.55 USD



## Main

Range of product	Modicon Quantum automation platform
Product or component type	Analogue output module

## Complementary

Analogue output number	8
Addressing requirement	8 output words
Loop voltage	6...30 V DC
Voltage drop	30 V 25 mA
Analogue output range	0...20 mA 0...20000 counts 0...25 mA 0...25000 counts 4...20 mA 0...16000 counts 4...20 mA 0...4095 counts
Absolute accuracy error	+/- 0.2 % of full scale at 77 °F (25 °C)
Linearity	+/- 12 µA 4...20 mA 0...4095 counts +/- 4 µA 0...20 mA 0...20000 counts +/- 4 µA 0...25 mA 0...25000 counts +/- 4 µA 4...20 mA 0...16000 counts
Accuracy drift according to temperature	0.004 % of full scale/°C typical 0.007 % of full scale/°C maximum
Isolation between channels and bus	1780 V for 1 minute AC
Update time	5 ms
Setting time	1.6 ms to 5% of the final value 3.2 ms to +/-0.1% of the final value
Fault type	Open circuit 4...20 mA
Bus current requirement	550 mA
Power dissipation in W	5 W
External power requirement	6...30 V
Marking	CE
Local signalling	1 LED green bus communication is present (Active) 1 LED red external fault

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

8 LEDs green channel is turned on  
8 LEDs red channel fault

Module format	Standard
Product weight	0.66 lb(US) (0.3 kg)

## Environment

Protective treatment	Conformal coating Humiseal 1A33
Product certifications	FM Class 1 Division 2 CUL
Standards	CSA C22.2 No 142 UL 508
Resistance to electromagnetic fields	9.14 V/yd (10 V/m) 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Relative humidity	95 % without condensation
Operating altitude	<= 16404.2 ft (5000 m)

## Ordering and shipping details

Category	18155 - QUANTUM I/O & POWER SUPPLIES
Discount Schedule	PC21
GTIN	00785901506997
Nbr. of units in pkg.	1
Package weight(Lbs)	0.23999999999999999
Returnability	N
Country of origin	FR

## Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0846 - Schneider Electric declaration of conformity <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold <a href="#">Reference not containing SVHC above the threshold</a>
Product environmental profile	Available
Product end of life instructions	Available

## Contractual warranty

Warranty period	18 months
-----------------	-----------

Racks for Modules Mounting


Dimensions of Modules and Racks

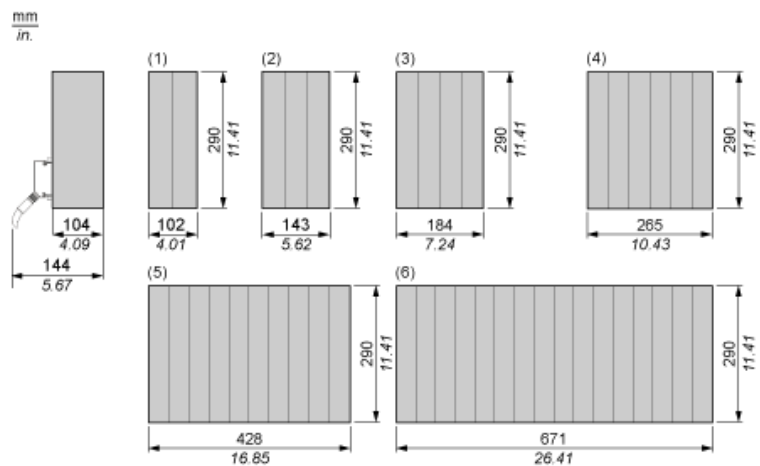

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

High Density Analog Output Module (8-Channel)

Wiring Diagram

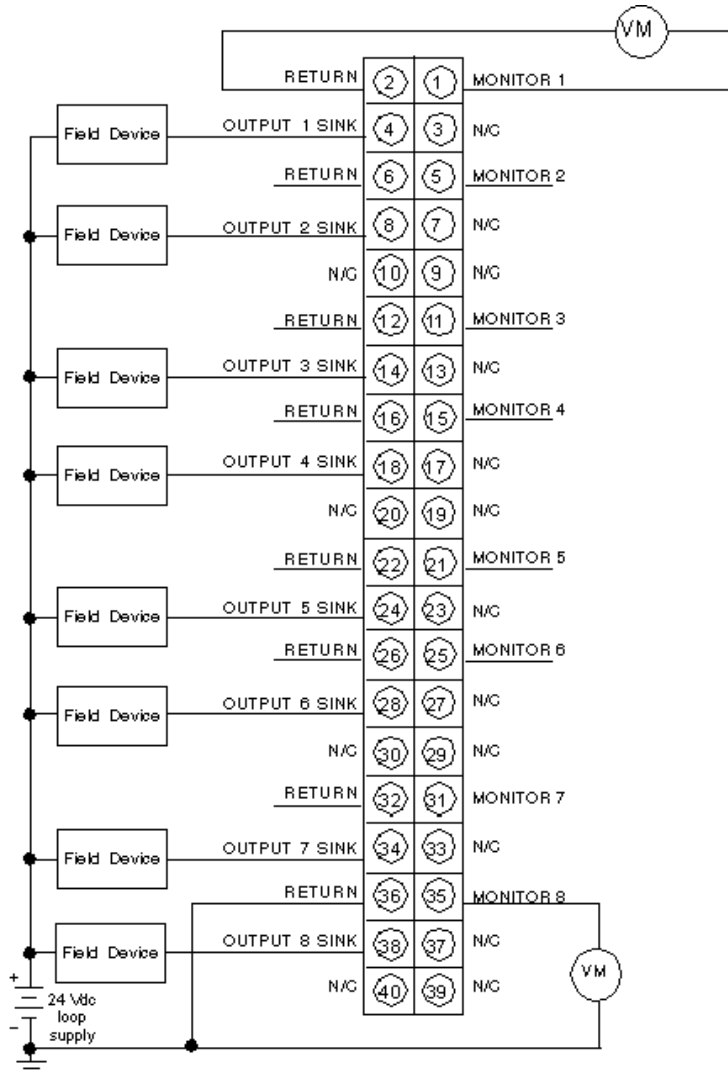

N/C Not Connected

All terminals labeled "RETURN" are common inside the module.