

Product availability : Stock - Normally stocked in distribution facility



Price* : 4401.05 USD



Main

Range of product	Modicon Quantum automation platform
Product or component type	Ethernet network TCP/IP module
Concept	Transparent Ready
Web server	Class B30
Web services	Rack viewer Data Editor (via PC terminal) Diagnostics via predefined web pages
Communication service	Global Data FDR server Modbus TCP messaging Bandwidth management I/O scanning SNMP network management
Communication port protocol	Ethernet Modbus TCP/IP
Physical interface	MT/RJ 100BASE-FX fiber optic RJ45 10BASE-T/100BASE-TX twisted pair
Transmission rate	10/100 Mbit/s

Complementary

Redundancy	Yes hot standby redundant architecture
Supply	Via the power supply of the rack
Marking	CE
Local signalling	1 LED 10 Mbps or 100 Mbps data rate (10 MB/100 MB) 1 LED collision detection (Coll) 1 LED download mode (Kernel) 1 LED Ethernet module fault (Fault) 1 LED Ethernet network status (RUN) 1 LED full-duplex mode (Fduplex) 1 LED module ready (Ready) 1 LED network active (Link) 1 LED rack operational (Active)

	1 LED transmission/reception activity (TxAct/RxAct)
Current consumption	750 mA 5 V DC
Module format	Standard
Product weight	0.76 lb(US) (0.345 kg)

Environment

IP degree of protection	IP20
Product certifications	CUL UL 508
Standards	FM Class 1 Division 2 CSA C22.2 No 142
Protective treatment	Conformal coating Humiseal 1A33
Resistance to electrostatic discharge	4 kV contact IEC 801-2 8 kV on air IEC 801-2
Resistance to electromagnetic fields	9.14 V/yd (10 V/m) 80...1000 MHz IEC 801-3
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Relative humidity	95 % without condensation
Operating altitude	<= 14763.78 ft (4500 m)

Ordering and shipping details

Category	18150 - QUANTUM CONTROLLERS,HSBY,COMM.
Discount Schedule	PC21
GTIN	00785901669654
Nbr. of units in pkg.	1
Package weight(Lbs)	2.2000000000000002
Returnability	N
Country of origin	FR

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0827 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available

Contractual warranty

Warranty period	18 months
-----------------	-----------

Racks for Modules Mounting

Dimensions of Modules and Racks

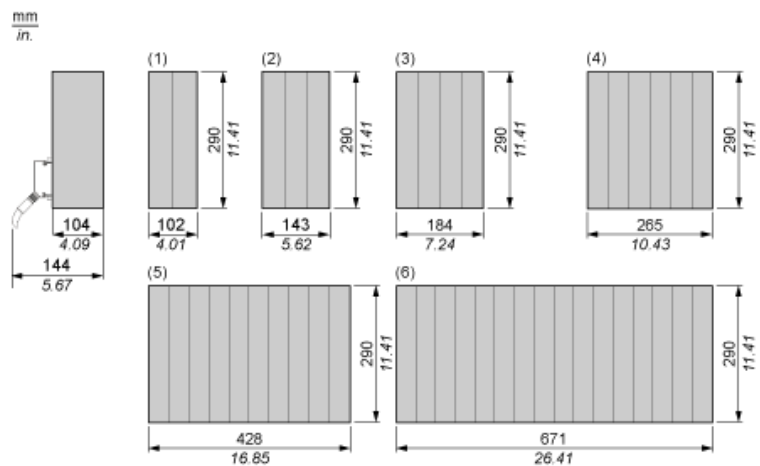

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots