



Current transformer 10...100 A for 3RB22/23/24 Size S2/S3 Stand-alone installation Main circuit: straight-through transformer Auxiliary circuit: --

product brand name	SIRIUS
product designation	Current measuring module
<b>General technical data</b>	
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	PTB 05 ATEX 3022
Substance Prohibitance (Date)	05/28/2009
<b>Main circuit</b>	
adjustable current response value current of the current-dependent overload release	10 ... 100 A
operating voltage	
• at AC-3e rated value maximum	690 V
operational current rated value	100 A
operational current at AC-3e at 400 V rated value	100 A
<b>Installation/ mounting/ dimensions</b>	
fastening method	stand-alone installation
<b>Connections/ Terminals</b>	
type of electrical connection	
• for main current circuit	straight-through transformers
<b>Safety related data</b>	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
<b>Certificates/ approvals</b>	
General Product Approval	For use in hazardous locations



[Confirmation](#)



Declaration of Conformity	Test Certificates	Marine / Shipping
---------------------------	-------------------	-------------------



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



Marine / Shipping

other



[Confirmation](#)

### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB2906-2JG1>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB2906-2JG1>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RB2906-2JG1>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RB2906-2JG1&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB2906-2JG1&lang=en)


Characteristic: Tripping characteristics, I<sup>t</sup>, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RB2906-2JG1/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB2906-2JG1&objecttype=14&gridview=view1>

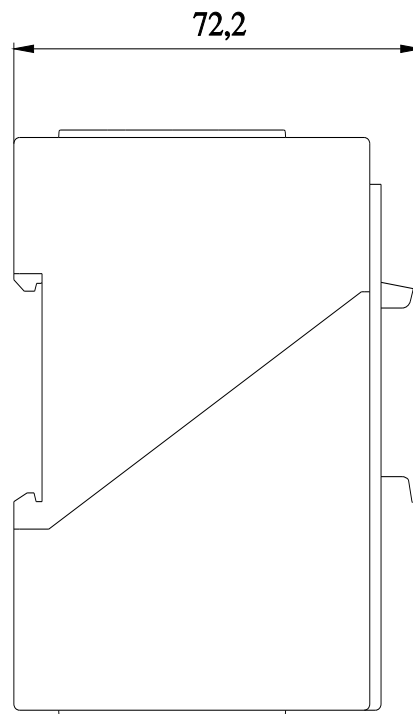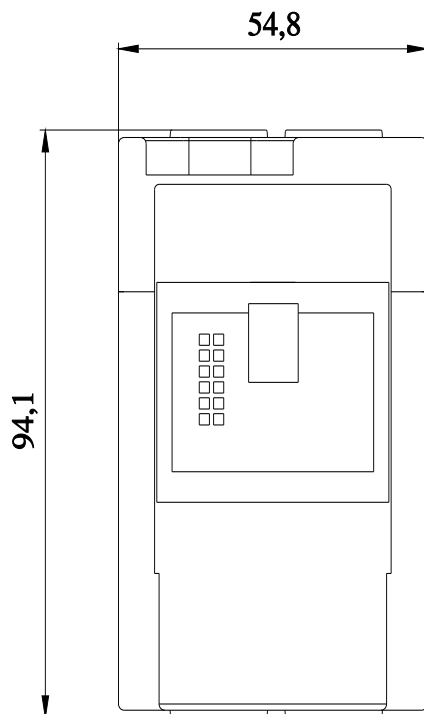

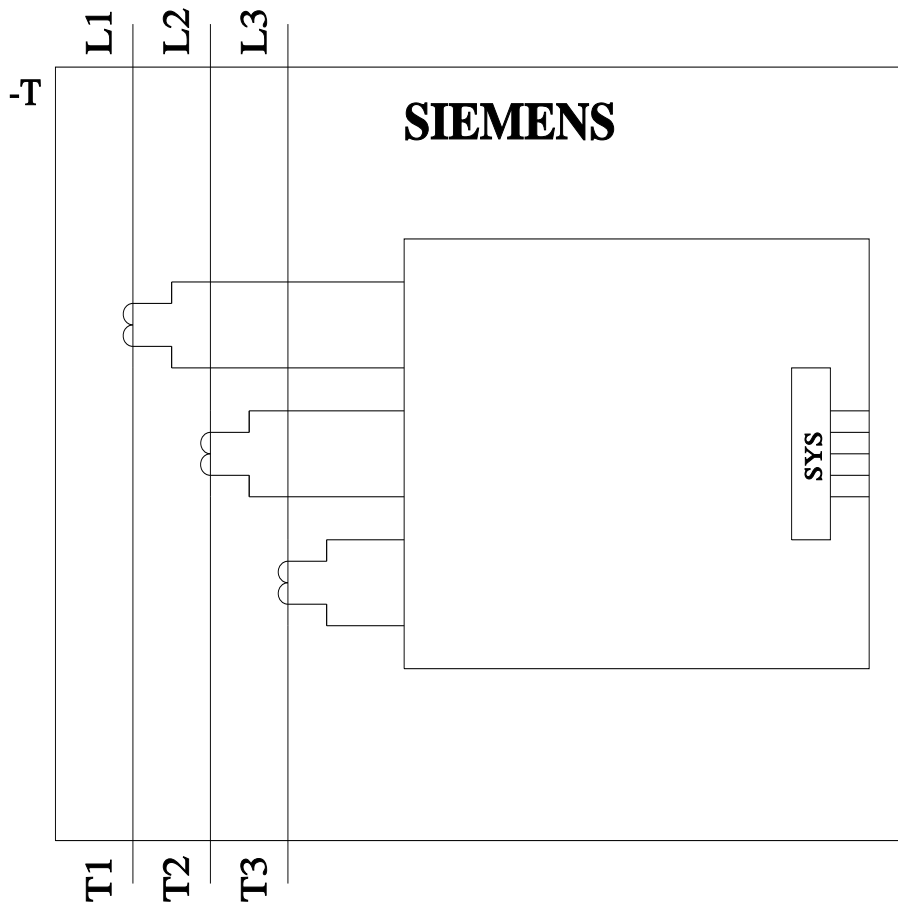

last modified:

2/9/2022 