

Timing relay, electronic on-delay 1 change-over contact, 7 time ranges 0.05 s...100 h 12-240 V AC/DC at 50/60 Hz AC with LED, screw terminal



Product brand name	SIRIUS
Product designation	timing relay
Design of the product	slow-operating
Product type designation	3RP25

General technical data	
<b>Product component</b>	
• Relay output	Yes
• semi-conductor output	No
<b>Product extension required remote control</b>	No
<b>Product extension optional remote control</b>	No
<b>Insulation voltage</b>	
• for overvoltage category III according to IEC 60664	
— with degree of pollution 3 rated value	300 V
<b>Test voltage for isolation test</b>	2.5 kV
<b>Degree of pollution</b>	3
<b>Surge voltage resistance rated value</b>	4 000 V
<b>Protection class IP</b>	IP20
<b>Shock resistance</b>	

• acc. to IEC 60068-2-27	11g / 15 ms
<b>Vibration resistance</b>	
• acc. to IEC 60068-2-6	10 ... 55 Hz / 0.35 mm
<b>Mechanical service life (switching cycles)</b>	
• typical	10 000 000
<b>Electrical endurance (switching cycles)</b>	
• at AC-15 at 230 V typical	100 000
<b>adjustable time</b>	0.05 s ... 100 h
<b>Relative setting accuracy relating to full-scale value</b>	5 %
<b>Thermal current</b>	5 A
<b>Recovery time</b>	250 ms
<b>Reference code acc. to DIN EN 81346-2</b>	K
<b>Relative repeat accuracy</b>	1 %

### Control circuit/ Control

<b>Type of voltage of the control supply voltage</b>	AC/DC
<b>Control supply voltage 1 at AC</b>	
• at 50 Hz	12 ... 240 V
• at 60 Hz	12 ... 240 V
<b>Control supply voltage frequency 1</b>	50 ... 60 Hz
<b>Control supply voltage 1</b>	
• at DC	12 ... 240 V
<b>Operating range factor control supply voltage rated value at DC</b>	
• initial value	0.8
• Full-scale value	1.1
<b>Operating range factor control supply voltage rated value at AC at 50 Hz</b>	
• initial value	0.8
• Full-scale value	1.1
<b>Operating range factor control supply voltage rated value at AC at 60 Hz</b>	
• initial value	0.8
• Full-scale value	1.1
<b>Inrush current peak</b>	
• at 24 V	0.4 A
• at 240 V	5 A
<b>Duration of inrush current peak</b>	
• at 24 V	0.3 ms
• at 240 V	0.5 ms

### Switching Function

<b>Switching function</b>	
• ON-delay	Yes

<ul style="list-style-type: none"> <li>• ON-delay/instantaneous contact</li> </ul>	No
<ul style="list-style-type: none"> <li>• passing make contact</li> </ul>	No
<ul style="list-style-type: none"> <li>• passing make contact/instantaneous contact</li> </ul>	No
<ul style="list-style-type: none"> <li>• OFF delay</li> </ul>	No
<b>Switching function</b>	
<ul style="list-style-type: none"> <li>• flashing symmetrically starting with interval/instantaneous</li> </ul>	No
<ul style="list-style-type: none"> <li>• flashing symmetrically starting with interval</li> </ul>	No
<ul style="list-style-type: none"> <li>• flashing symmetrically starting with pulse/instantaneous</li> </ul>	No
<ul style="list-style-type: none"> <li>• flashing symmetrically starting with pulse</li> </ul>	No
<ul style="list-style-type: none"> <li>• flashing asymmetrically starting with interval</li> </ul>	No
<ul style="list-style-type: none"> <li>• flashing asymmetrically starting with pulse</li> </ul>	No
<b>Switching function</b>	
<ul style="list-style-type: none"> <li>• star-delta circuit with delay time</li> </ul>	No
<ul style="list-style-type: none"> <li>• star-delta circuit</li> </ul>	No
<b>Switching function with control signal</b>	
<ul style="list-style-type: none"> <li>• additive ON delay</li> </ul>	No
<ul style="list-style-type: none"> <li>• passing break contact</li> </ul>	No
<ul style="list-style-type: none"> <li>• passing break contact/instantaneous</li> </ul>	No
<ul style="list-style-type: none"> <li>• OFF delay</li> </ul>	No
<ul style="list-style-type: none"> <li>• OFF delay/instantaneous</li> </ul>	No
<ul style="list-style-type: none"> <li>• pulse delayed</li> </ul>	No
<ul style="list-style-type: none"> <li>• pulse delayed/instantaneous</li> </ul>	No
<ul style="list-style-type: none"> <li>• pulse-shaping</li> </ul>	No
<ul style="list-style-type: none"> <li>• pulse-shaping/instantaneous</li> </ul>	No
<ul style="list-style-type: none"> <li>• additive ON delay/instantaneous</li> </ul>	No
<ul style="list-style-type: none"> <li>• ON-delay/OFF-delay/instantaneous</li> </ul>	No
<ul style="list-style-type: none"> <li>• passing make contact</li> </ul>	No
<ul style="list-style-type: none"> <li>• passing make contact/instantaneous contact</li> </ul>	No
<b>Switching function of interval relay with control signal</b>	
<ul style="list-style-type: none"> <li>• retrotriggerable with deactivated control signal/instantaneous contact</li> </ul>	No
<ul style="list-style-type: none"> <li>• retrotriggerable with activated control signal</li> </ul>	No
<ul style="list-style-type: none"> <li>• retrotriggerable with activated control signal/instantaneous contact</li> </ul>	No
<ul style="list-style-type: none"> <li>• retriggerable with deactivated control signal</li> </ul>	No
<b>Short-circuit protection</b>	
<b>Design of the fuse link</b>	
<ul style="list-style-type: none"> <li>• for short-circuit protection of the auxiliary switch required</li> </ul>	fuse gL/gG: 4 A

Auxiliary circuit	
<b>Material of switching contacts</b>	AgSnO <sub>2</sub>
<b>Number of NC contacts</b>	0
• delayed switching	
<b>Number of NO contacts</b>	0
• delayed switching	
<b>Number of CO contacts</b>	1
• delayed switching	
<b>Operating current of auxiliary contacts at AC-15</b>	
• at 24 V	3 A
• at 250 V	3 A
<b>Operating current of auxiliary contacts at DC-13</b>	
• at 24 V	1 A
• at 125 V	0.2 A
• at 250 V	0.1 A
<b>Operating frequency with 3RT2 contactor maximum</b>	5 000 1/h
<b>Contact reliability of auxiliary contacts</b>	one incorrect switching operation of 100 million switching operations (17 V, 5 mA)
<b>Contact rating of auxiliary contacts according to UL</b>	R300 / B300
<b>Influence of the surrounding temperature</b>	1% in the whole temperature range to the set runtime
<b>Power supply influence</b>	1% in the whole voltage range to the set runtime
<b>Switching capacity current with inductive load</b>	0.01 ... 3 A

Inputs/ Outputs	
<b>Product function</b>	
• at the relay outputs Switchover delayed/without delay	No
• non-volatile	No

Electromagnetic compatibility	
<b>EMI immunity</b>	
• acc. to IEC 61812-1	EN 61000-6-2
<b>Conducted interference</b>	
• due to burst acc. to IEC 61000-4-4	2 kV network connection / 1 kV control connection
• due to conductor-earth surge acc. to IEC 61000-4-5	2 kV
• due to conductor-conductor surge acc. to IEC 61000-4-5	1 kV
<b>Field-bound parasitic coupling acc. to IEC 61000-4-3</b>	10 V/m
<b>Electrostatic discharge acc. to IEC 61000-4-2</b>	4 kV contact discharge / 8 kV air discharge

Safety related data	
<b>Protection against electrical shock</b>	finger-safe
<b>Type of insulation</b>	Basic insulation
<b>Category acc. to EN 954-1</b>	none

## Connections/ Terminals

<b>Product function</b>	Yes
<ul style="list-style-type: none"> <li>removable terminal for auxiliary and control circuit</li> </ul>	
<b>Type of electrical connection</b>	screw-type terminals
<ul style="list-style-type: none"> <li>for auxiliary and control current circuit</li> </ul>	
<b>Type of connectable conductor cross-sections</b>	1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>solid</li> <li>finely stranded with core end processing</li> <li>at AWG conductors solid</li> <li>at AWG conductors stranded</li> </ul>	1x (0.5 ... 4 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> ) 1x (20 ... 12), 2x (20 ... 14) 1x (20 ... 12), 2x (20 ... 14)
<b>Connectable conductor cross-section</b>	0.5 ... 4 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>solid</li> <li>finely stranded with core end processing</li> </ul>	0.5 ... 4 mm <sup>2</sup>
<b>AWG number as coded connectable conductor cross section</b>	20 ... 12
<ul style="list-style-type: none"> <li>solid</li> <li>stranded</li> </ul>	20 ... 14
<b>Tightening torque</b>	0.6 ... 0.8 N·m
<b>Design of the thread of the connection screw</b>	M3

## Installation/ mounting/ dimensions

<b>Mounting position</b>	any
<b>Mounting type</b>	screw and snap-on mounting onto 35 mm standard mounting rail
<b>Height</b>	100 mm
<b>Width</b>	17.5 mm
<b>Depth</b>	90 mm
<b>Required spacing</b>	
<ul style="list-style-type: none"> <li>with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>for live parts <ul style="list-style-type: none"> <li>— forwards</li> </ul> </li> </ul>	0 mm 0 mm 0 mm 0 mm 0 mm  0 mm 0 mm 0 mm 0 mm 0 mm  0 mm

— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm

### Ambient conditions

<b>Installation altitude at height above sea level</b>	
• maximum	2 000 m
<b>Ambient temperature</b>	
• during operation	-25 ... +60 °C
• during storage	-40 ... +85 °C
• during transport	-40 ... +85 °C
<b>Relative humidity</b>	
• during operation	10 ... 95 %

### Certificates/ approvals

<b>General Product Approval</b>	<b>EMC</b>	<b>Declaration of Conformity</b>
---------------------------------	------------	----------------------------------



<b>Declaration of Conformity</b>	<b>Test Certificates</b>	<b>Marine / Shipping</b>
----------------------------------	--------------------------	--------------------------

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)



<b>Marine / Shipping</b>	<b>other</b>
--------------------------	--------------



[Confirmation](#)

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RP2525-1AW30>

**Cax online generator**


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RP2525-1AW30>


**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RP2525-1AW30>

**Characteristic: Derating**

<https://support.industry.siemens.com/cs/ww/en/ps/3RP2525-1AW30/manual>

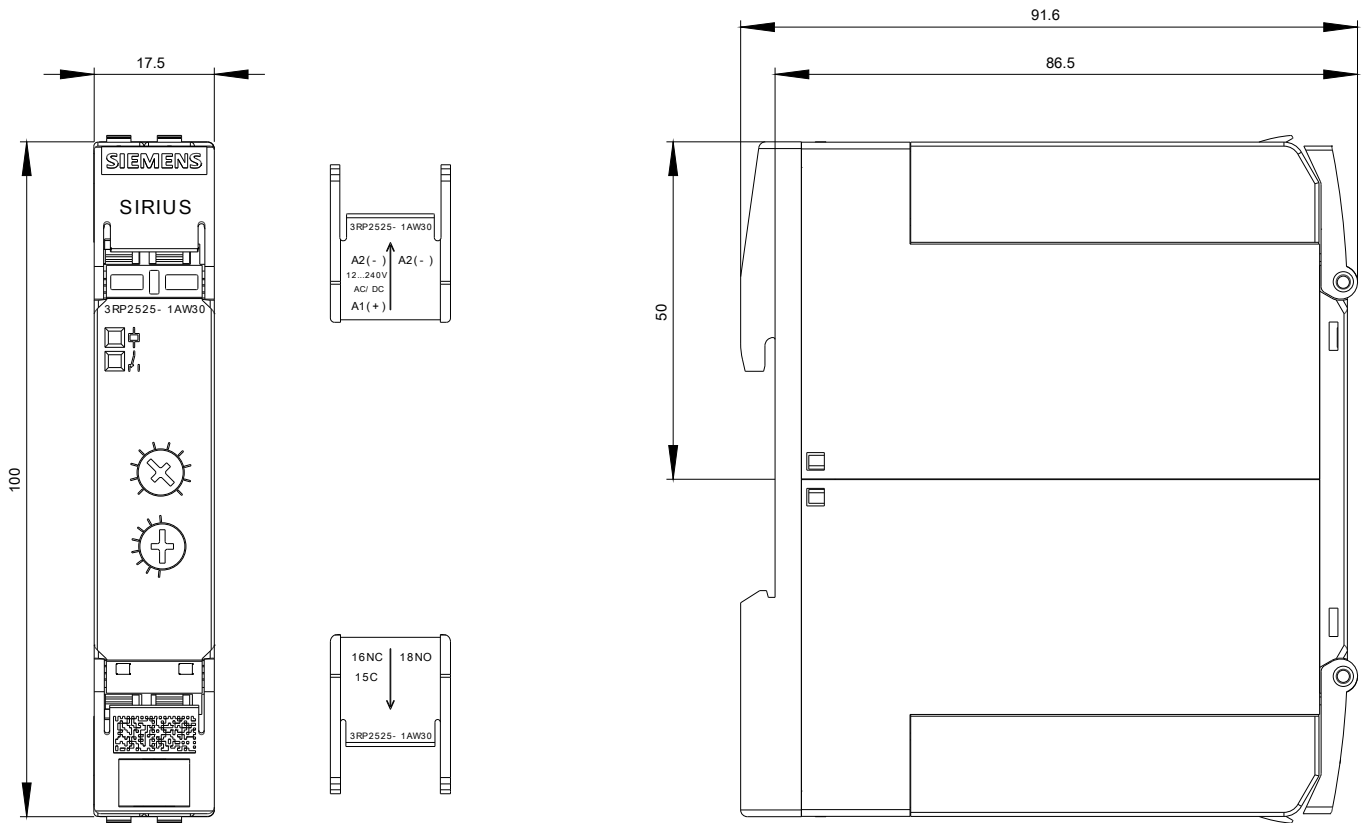

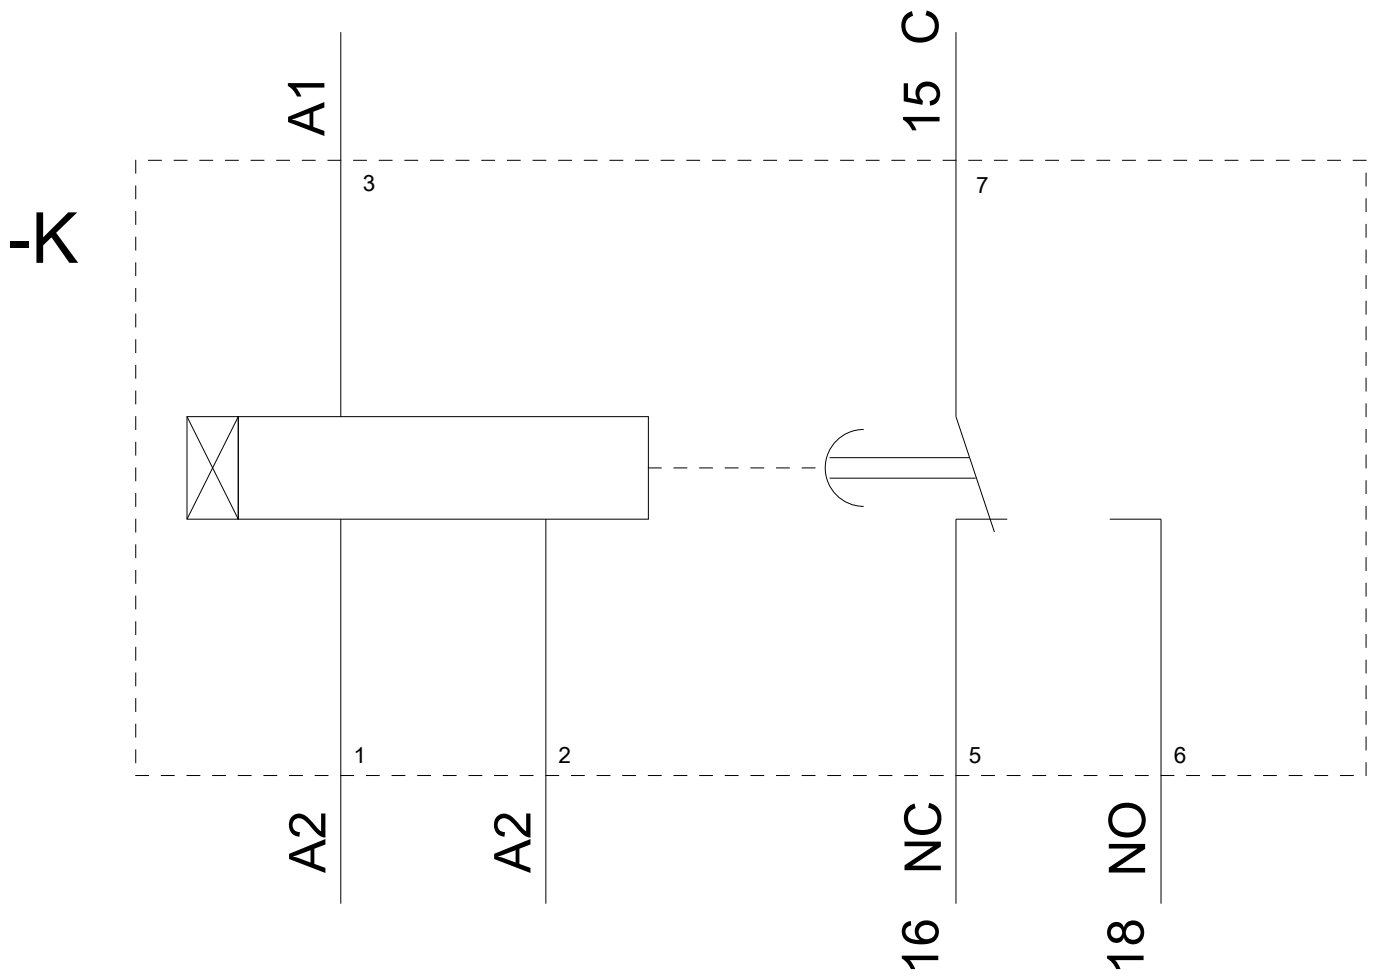

last modified:

07/20/2020