



Communication module PROFIBUS for SIRIUS soft starter 3RW44  
 Required firmware version 3RW44 >= \*E06\*. implemented for starters 3RW44 from delivery date May 2006

product brand name	SIRIUS
product category	Communication modules
product designation	Communication module
design of the product	for 3RW44 soft starter integration in the PROFIBUS network with DPV1 slave functionality. From module firmware version E04 and higher (and/or date of manufacture May 1, 2009 or later), DPV1 operation of the soft starter on a Y-link is also possible (only DPV0 operation possible with < E04)
Substance Prohibance (Date)	01.05.2012 00:00:00

Installation/ mounting/ dimensions	
height	117.3 mm
width	36.6 mm
depth	88.6 mm

Safety related data	
protection class IP on the front acc. to IEC 60529	IP20
touch protection on the front acc. to IEC 60529	finger-safe, for vertical contact from the front

Certificates/ approvals		
General Product Approval	EMC	Declaration of Conformity



[Miscellaneous](#)



Test Certificates	Marine / Shipping	other
-------------------	-------------------	-------

[Special Test Certificate](#)



[Confirmation](#)

### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4900-0KC00>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4900-0KC00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW4900-0KC00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW4900-0KC00&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW4900-0KC00&lang=en)

Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


<https://support.industry.siemens.com/cs/ww/en/ps/3RW4900-0KC00/char>

Characteristic: Installation altitude


<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW4900-0KC00&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

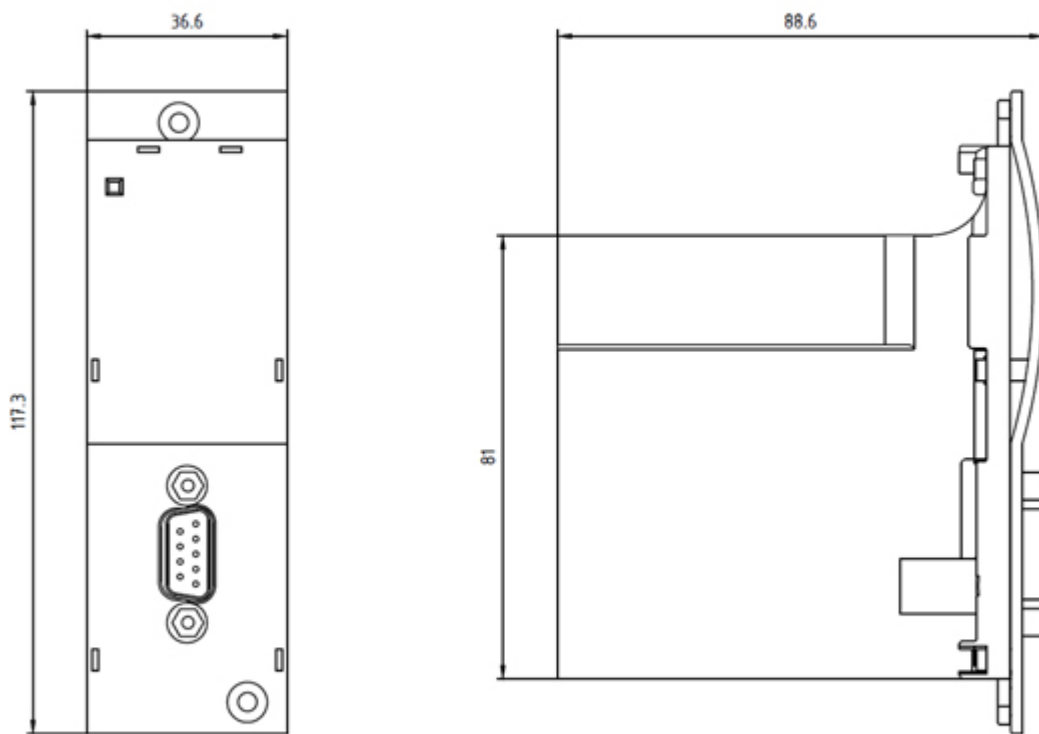

-K1

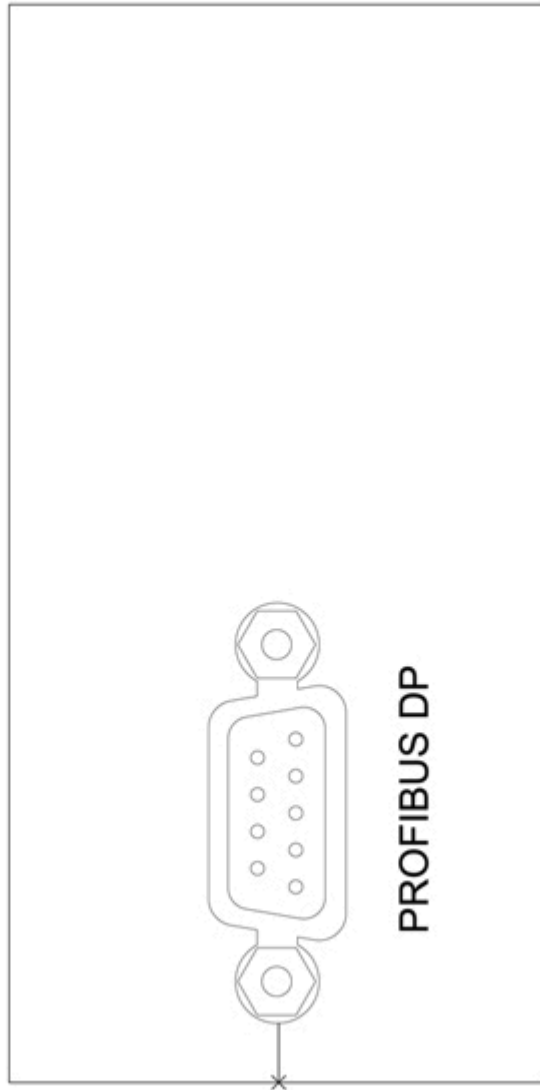

last modified:

12/15/2020 