


product type designation

product description

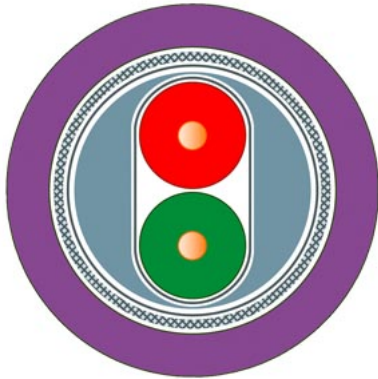

PROFIBUS FC Standard Cable GP

Standard bus cable (2 wires), preferred length, not assembled

PROFIBUS FC Standard, bus cable 2-wire, shielded, special configuration for Quick assembly 20 m.

suitability for use	Standard cable specially designed for fast, permanent installation
cable designation	02YSY (ST) CY 1x2x0,64/2,55-150 VI KF 40 FR
wire length	20 m
electrical data	
attenuation factor per length	
<ul style="list-style-type: none"> at 9.6 kHz / maximum at 38.4 kHz / maximum at 4 MHz / maximum at 16 MHz / maximum 	0.0025 dB/m 0.004 dB/m 0.022 dB/m 0.042 dB/m
impedance	
<ul style="list-style-type: none"> rated value at 9.6 kHz at 38.4 kHz at 3 MHz ... 20 MHz 	150 Ω 270 Ω 185 Ω 150 Ω
relative symmetrical tolerance	
<ul style="list-style-type: none"> of the characteristic impedance at 9.6 kHz of the characteristic impedance at 38.4 kHz of the characteristic impedance at 3 MHz ... 20 MHz 	10 % 10 % 10 %
loop resistance per length / maximum	110 mΩ/m
shield resistance per length / maximum	9.5 Ω/km
capacity per length / at 1 kHz	28.5 pF/m
operating voltage	
<ul style="list-style-type: none"> RMS value 	100 V
mechanical data	
number of electrical cores	2
design of the shield	Overlapped aluminum-clad foil, sheathed in a braided screen of tin-plated copper wires
type of electrical connection / FastConnect	Yes
outer diameter	
<ul style="list-style-type: none"> of inner conductor of the wire insulation of the inner sheath of the cable of cable sheath 	0.65 mm 2.55 mm 5.4 mm 8 mm
symmetrical tolerance of the outer diameter / of cable sheath	0.4 mm
material	
<ul style="list-style-type: none"> of the wire insulation of the inner sheath of the cable 	polyethylene (PE) PVC

<ul style="list-style-type: none"> • of cable sheath 	PVC
color	
<ul style="list-style-type: none"> • of the insulation of data wires • of cable sheath 	red/green Violet
bending radius	
<ul style="list-style-type: none"> • with single bend / minimum permissible • with multiple bends / minimum permissible 	37.5 mm 75 mm
tensile load / maximum	100 N
weight per length	78 kg/km
ambient conditions	
ambient temperature	
<ul style="list-style-type: none"> • during operation • during storage • during transport • during installation • note 	-40 ... +75 °C -40 ... +75 °C -40 ... +75 °C -40 ... +75 °C Electrical properties measured at 20 °C, tests according to DIN 47250 part 4 respectively DIN VDE 0472
fire behavior	flame resistant according to IEC 60332-3-24 (Category C) and UL 1685 (CSA FT 4)
class of burning behaviour / according to EN 13501-6	Eca
chemical resistance	
<ul style="list-style-type: none"> • to mineral oil • to grease • to water 	oil resistant according to IEC 60811-2-1 (4 h / 70°C) Conditional resistance conditional resistance
radiological resistance / to UV radiation	resistant
product features, product functions, product components / general	
product feature	
<ul style="list-style-type: none"> • halogen-free • silicon-free 	No Yes
standards, specifications, approvals	
UL/ETL listing / 300 V Rating	Yes; c(ETL)us, CMG / (ETL)us CL3 / Sun Res
UL/ETL style / 600 V Rating	Yes; cRUus AWM 21694 AWM I A/B 60°C 600V FT2
certificate of suitability	
<ul style="list-style-type: none"> • EAC approval • CE marking • UL approval • RoHS conformity 	Yes Yes Yes Yes
Marine classification association	
<ul style="list-style-type: none"> • American Bureau of Shipping Europe Ltd. (ABS) • French marine classification society (BV) • Det Norske Veritas (DNV) • Germanische Lloyd (GL) • Lloyds Register of Shipping (LRS) • Nippon Kaiji Kyokai (NK) • Polski Rejestr Statkow (PRS) 	No No No No No No No
reference code	
<ul style="list-style-type: none"> • according to IEC 81346-2 • according to IEC 81346-2:2019 	WG WGB
further information / internet-Links	
Internet-Link	
<ul style="list-style-type: none"> • to web page: selection aid TIA Selection Tool • to website: Industrial communication • to website: Industry Mall • to website: Information and Download Center • to website: Selection guide for cables and connectors • to website: Image database • to website: CAx-Download-Manager • to website: Industry Online Support 	http://www.siemens.com/tia-selection-tool http://www.siemens.com/simatic-net https://mall.industry.siemens.com http://www.siemens.com/industry/infocenter https://sie.ag/2QdlxcP http://automation.siemens.com/bilddb http://www.siemens.com/cax https://support.industry.siemens.com
last modified:	10/30/2021 