

SIEMENS

Product data sheet

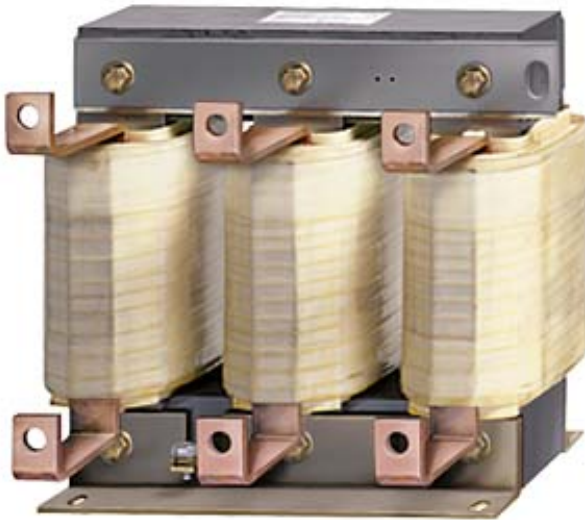
6SL3000-0CE35-1AA0


Fig. similar

SINAMICS/MICROMASTER PX LINE REACTOR
 INPUT: 3AC 380-480 V,
 50/60 HZ 508 A

Output current / rated value	508 A
Effective power loss	
• at 50 Hz	310 W
• at 60 Hz	370 W
Design of electrical connection / for PE conductor	M6 screw
Protection class IP	IP00
Width	300 mm
Height	269 mm
Depth	212.5 mm
Net weight	38 kg

Further information

[Information and download center for Industry Automation and Drives](#)

[Technical documentation \(Motion Control\)](#)

[Industry Mall \(online ordering system\)](#)

[Service & Support \(FAQs, manuals, operating instructions, certificates, characteristics, ...\)](#)

last change:

Mar 1, 2013