



Price\* : 584.00 USD



### Main

Range of product	Modicon M340 automation platform
Accessory / separate part category	Extension accessory
Accessory / separate part type	Backplane
Accessory / separate part designation	Ruggedized backplane expander
Product compatibility	BMXXBP0600 BMXXBP0800 BMXXBP0400 BMXXBP1200
Accessory / separate part destination	For multitracks configuration
Product specific application	For severe environments

### Complementary

Electrical connection	2 female connectors SUB-D 9
Local signalling	1 LED green operating status (RUN) bus 1 LED red collision error (COL) rack 4 LEDs green rack addresses status
Current consumption	160 mA 24 V DC 22 mA 3.3 V DC
Module format	Standard

### Environment

IP degree of protection	IP20
Ambient air temperature for operation	-13...158 °F (-25...70 °C)
Relative humidity	10...95 % without condensation
Protective treatment	TC Conformal coating Humiseal 1A33
Environmental characteristic	3C3 conforming to EN/IEC 60721-3-3 3C4 conforming to EN/IEC 60721-3-3

## Ordering and shipping details

Category	18160 - MODICON M340
Discount Schedule	PC34
GTIN	00785901687368
Nbr. of units in pkg.	1
Package weight(Lbs)	0.41999999999999998
Returnability	Y
Country of origin	FR

## Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0911 - Schneider Electric declaration of conformity <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold <a href="#">Reference not containing SVHC above the threshold</a>
Product environmental profile	Available
Product end of life instructions	Available

## Contractual warranty

Warranty period	18 months
-----------------	-----------

Modules Mounted on Racks

Dimensions

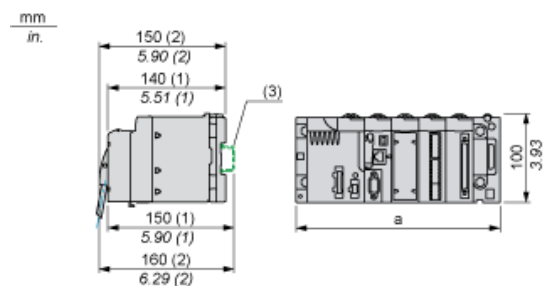

- (1) With removable terminal block (cage, screw or spring).
- (2) With FCN connector.
- (3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81