


EL2624 | EtherCAT Terminal, 4-channel relay output, 125 V AC, 30 V DC, 0.5 A AC, 2 A DC

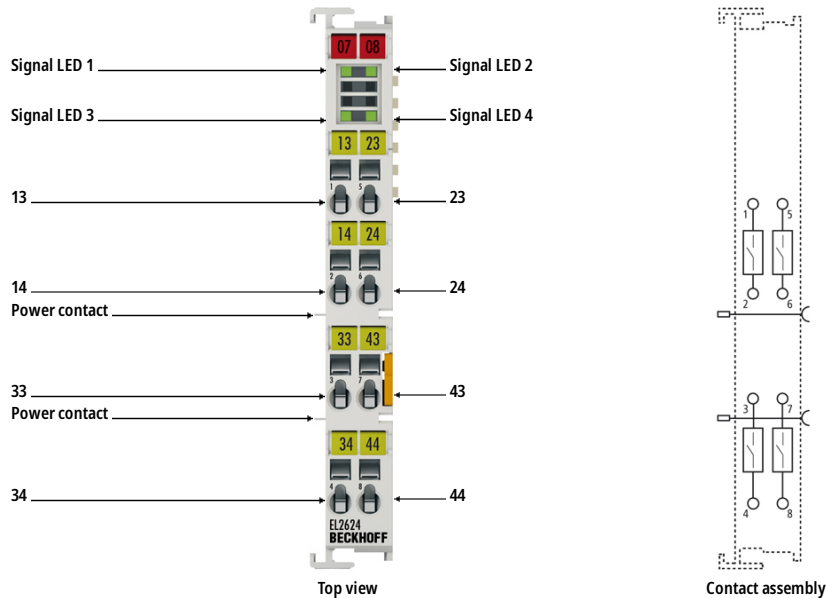

i **Product status:** Regular delivery

The EL2624 output terminal has four relays, each with a single contact. The relay contact can be used up to 125 V AC or 30 V DC. The signal state of the EtherCAT Terminal is indicated by light emitting diodes. The EL2624 features potential-free contacts. The power contacts are passed through.

Special features:

- Relay output
- 4 x make contact
- Connection of ohmic loads
- potential-free

Product information

Technical Data

Technical data	EL2624, ES2624
Connection technology	relay output
Number of outputs	4 x make contacts
Nominal voltage	125 V AC/30 V DC
Load type	ohmic
Distributed clocks	–
Ohmic switching current	0.5 A AC/2 A DC per channel

Inductive switching current	no data
Minimum permitted load	10 µA at 10 mV DC with intact contact coating
Current consumption E-bus	typ. 200 mA
Electrical isolation	500 V (E-bus/field potential)
Current consumption power contacts	–
Bit width in the process image	4 outputs
Operating cycles mech. (min.)	1 x 10 ⁸
Operating cycles electr. (min.)	2 x 10 ⁵ (1 A/30 V DC)
Configuration	no address or configuration setting
Weight	approx. 50 g
Operating/storage temperature	0...+55 °C/-25...+85 °C
Relative humidity	95 %, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protect. rating/installation pos.	IP20/variable
Pluggable wiring	for all ESxxxx terminals
Approvals/markings	CE, UL

Housing data	EL-12-8pin	ES-12-8pin
Design form	compact terminal housing with signal LEDs	terminal housing with pluggable wiring level
Material	polycarbonate	
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm	
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock	
Side by side mounting by means of	double slot and key connection	
Marking	labeling of the BZxxx series	
Wiring	solid conductor (e), flexible conductor (f) and ferrule (a): spring actuation by screwdriver	
Connection cross-section	s*: 0.08...2.5 mm ² , st*: 0.08...2.5 mm ² , f*: 0.14...1.5 mm ²	s*: 0.08...1.5 mm ² , st*: 0.08...1.5 mm ² , f*: 0.14...1.5 mm ²
Connection cross-section AWG	s*: AWG 28...14, st*: AWG 28...14, f*: AWG 26...16	s*: AWG 28...16, st*: AWG 28...16, f*: AWG 26...16
Stripping length	8...9 mm	9...10 mm
Current load power contacts	I _{max} : 10 A	

*s: solid wire; st: stranded wire; f: with ferrule

Ordering Information

Ordering information

EL2624	EtherCAT Terminal, 4-channel relay output, 125 V AC, 30 V DC, 0.5 A AC, 2 A DC
ES2624	EtherCAT Terminal, 4-channel relay output, 125 V AC, 30 V DC, 0.5 A AC, 2 A DC, pluggable wiring
