


# EL3112-0011 | EtherCAT Terminal, 2-channel analog input, current, $\pm 20$ mA, 16 bit, differential

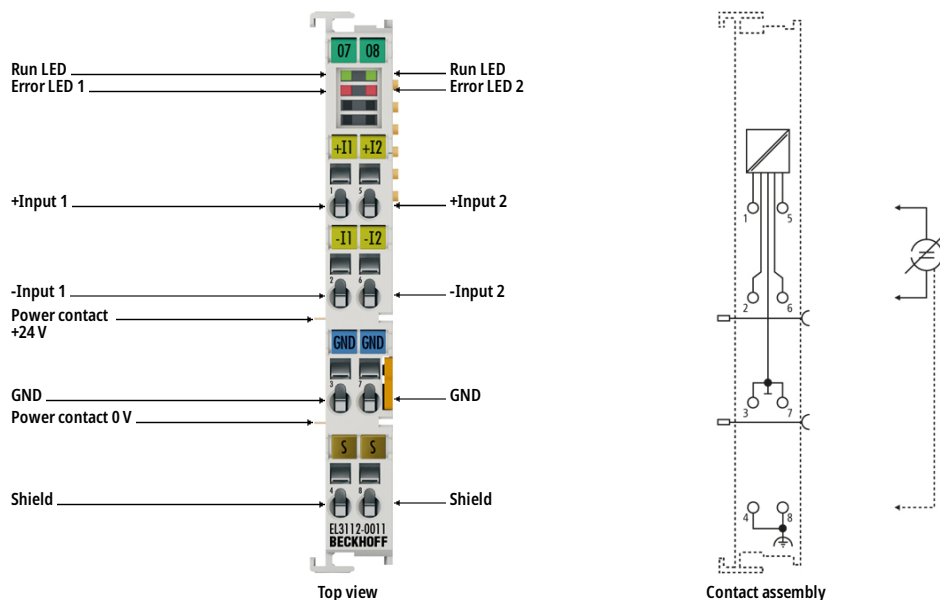

**i Product status:** Regular delivery

The EL3112-0011 analog input terminal processes signals in the range between  $-20$  and  $+20$  mA. The current is digitized to a resolution of 16 bits and is transmitted, electrically isolated, to the higher-level automation device. The input channels of the EtherCAT Terminal have differential inputs and possess a common, internal ground potential. The EL3112-0011 combines two channels in one housing. Overload condition is detected, and the terminal status is relayed to the controller via the E-bus. The error LEDs indicate an overload condition.

## Product information

### Technical Data

Technical data	EL3112-0011
Number of inputs	2 (differential)
Power supply	via the E-bus
Signal type	differential
Signal current	$-20 \dots +20$ mA
Oversampling factor	–
Input signal bandwidth	see input filter
Distributed clocks	yes
Distributed clock precision	$\ll 1 \mu\text{s}$
Internal resistance	typ. $< 85 \Omega$

Input filter limit frequency	5 kHz
Common-mode voltage UCM	max. 10 V
Conversion time	~ 50 µs (fast mode ~ 35 µs)
Resolution	16 bit (incl. sign)
Measuring error	< ±0.3 % (relative to full scale value)
Surge voltage resistance	35 V DC
Electrical isolation	500 V (E-bus/signal voltage)
Current consumption power contacts	–
Current consumption E-bus	typ. 170 mA
Bit width in the process image	inputs: 8 byte
Special features	standard and compact process image, activatable FIR/IIR filters, limit value monitoring
Weight	approx. 55 g
Operating/storage temperature	-25...+60 °C/-40...+85 °C
Relative humidity	95 %, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protect. rating/installation pos.	IP20/variable
Approvals/markings	CE, UL, ATEX
Ex marking	II 3 G Ex nA IIC T4 Gc

<b>Housing data</b>	<b>EL-12-8pin</b>
Design form	compact terminal housing with signal LEDs
Material	polycarbonate
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock
Side by side mounting by means of	double slot and key connection
Marking	labeling of the BZxxx series
Wiring	solid conductor (e), flexible conductor (f) and ferrule (a): spring actuation by screwdriver
Connection cross-section	s*: 0.08...2.5 mm <sup>2</sup> , st*: 0.08...2.5 mm <sup>2</sup> , f*: 0.14...1.5 mm <sup>2</sup>
Connection cross-section AWG	s*: AWG 28...14, st*: AWG 28...14, f*: AWG 26...16
Stripping length	8...9 mm
Current load power contacts	I <sub>max</sub> : 10 A

\*s: solid wire; st: stranded wire; f: with ferrule