
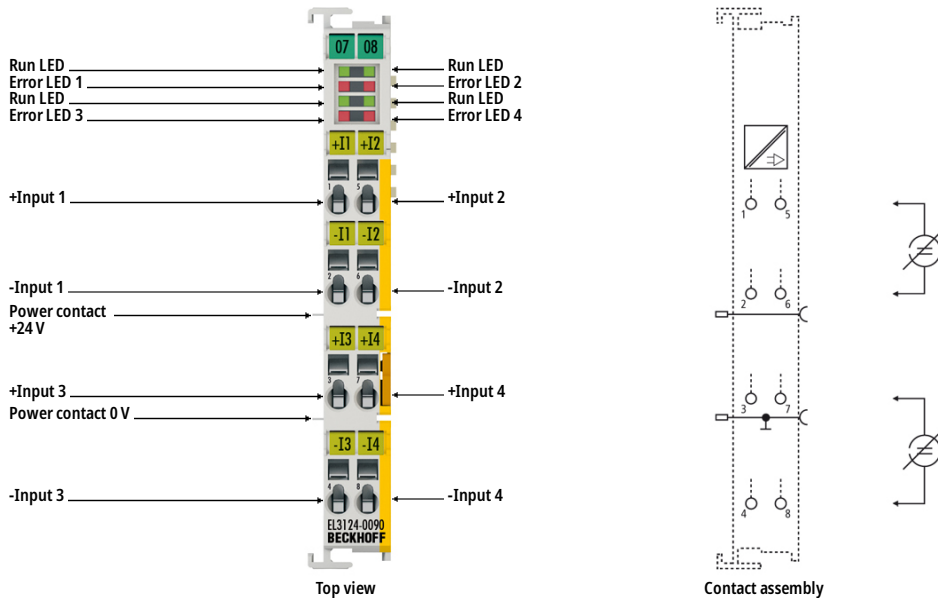


EL3124-0090 | EtherCAT Terminal, 4-channel analog input, current, 4...20 mA, 16 bit, differential, TwinSAFE SC



i Product status: Regular delivery

The EL3124-0090 analog input terminal handles signals in the range from 4 to 20 mA. The current is digitized to a resolution of 16 bits and is transmitted, in an electrically isolated form, to the higher-level automation device. The input channels of the EtherCAT Terminal have differential inputs and possess a common, internal ground potential.

With the aid of the TwinSAFE SC technology (TwinSAFE Single Channel) it is possible to make use of standard signals for safety tasks in any network or fieldbus. To do this, EtherCAT I/Os from the areas of analog input, position measurement or communication (4...20 mA, incremental encoder, IO-Link, etc.) are extended by the TwinSAFE SC function. The properties typical for the signals and the standard functions of the I/O components are retained. TwinSAFE SC I/Os differ optically from standard I/Os by a yellow stripe on the front of the housing.

The TwinSAFE SC technology enables communication via a TwinSAFE protocol. These connections can be distinguished from the usual secure communication via Safety over EtherCAT.

The data from the TwinSAFE SC components is fed via a TwinSAFE protocol to the TwinSAFE Logic, where it can be used in the context of safety-relevant applications. Detailed examples confirmed/calculated by the TÜV SÜD for the correct application of the TwinSAFE SC components and the respective normative classifications can be found in the TwinSAFE application manual.

Product information

Technical Data

Technical data	EL3124-0090
Number of inputs	4 (differential)

Power supply	via the E-bus
Technology	differential input
Signal type	differential
Signal current	4...20 mA
Distributed clocks	yes
Internal resistance	typ. 85 Ω + diode voltage
Input filter limit frequency	5 kHz
Common-mode voltage UCM	max. 10 V
Conversion time	~ 100 μ s
Resolution	16 bit (incl. sign)
Measuring error	< \pm 0.3 % (relative to full scale value)
Surge voltage resistance	35 V DC
Electrical isolation	500 V (E-bus/signal voltage)
Current consumption power contacts	–
Current consumption E-bus	typ. 130 mA
Bit width in the process image	inputs: 16 byte
Configuration	no address or configuration setting
Special features	TwinSAFE SC, standard and compact process image, activatable FIR/IIR filters, limit value monitoring
Weight	approx. 60 g
Operating/storage temperature	-25...+60 $^{\circ}$ C/-40...+85 $^{\circ}$ C
Relative humidity	95 %, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protect. rating/installation pos.	IP20/variable
Approvals/markings	CE, UL, ATEX
Ex marking	II 3 G Ex nA IIC T4 Gc

Housing data	EL-12-8pin
Design form	compact terminal housing with signal LEDs
Material	polycarbonate
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock
Side by side mounting by means of	double slot and key connection
Marking	labeling of the BZxxx series
Wiring	solid conductor (e), flexible conductor (f) and ferrule (a): spring actuation by screwdriver

Connection cross-section	s*: 0.08...2.5 mm ² , st*: 0.08...2.5 mm ² , f*: 0.14...1.5 mm ²
Connection cross-section AWG	s*: AWG 28...14, st*: AWG 28...14, f*: AWG 26...16
Stripping length	8...9 mm
Current load power contacts	I _{max} : 10 A

*s: solid wire; st: stranded wire; f: with ferrule