
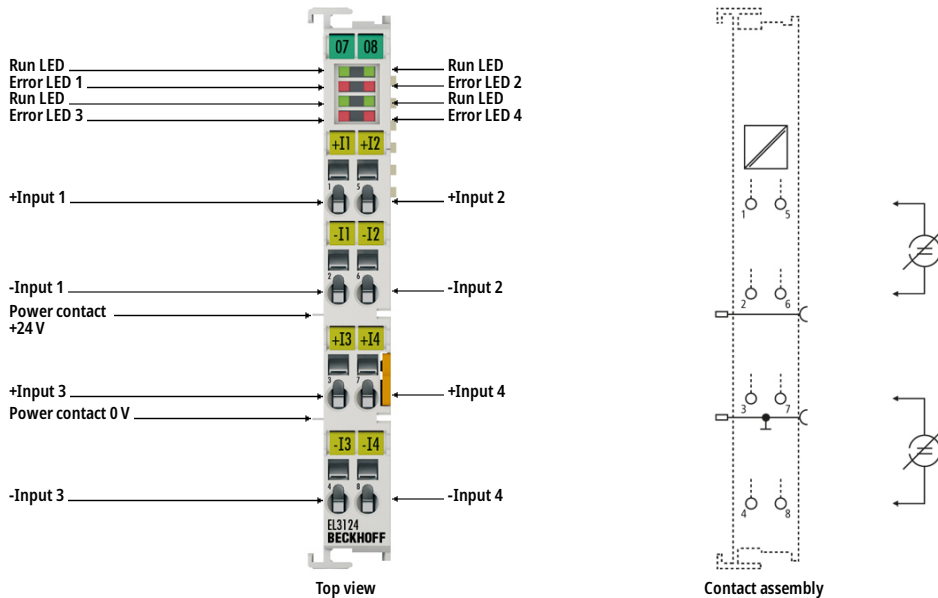


EL3124 | EtherCAT Terminal, 4-channel analog input, current, 4...20 mA, 16 bit, differential



i Product status: Regular delivery

The EL3124 analog input terminal handles signals in the range from 4 to 20 mA. The current is digitized to a resolution of 16 bits and is transmitted, in an electrically isolated form, to the higher-level automation device. The input channels of the EtherCAT Terminal have differential inputs and possess a common, internal ground potential. The EL3124 combines four channels in one housing. An open lead or overload condition are detected and the terminal status is relayed to the controller via the E-bus. The EtherCAT Terminal indicates its signal state by means of light emitting diodes. The error LEDs indicate an overload condition and a broken wire.

Product information

Technical Data

Technical data	EL3124, ES3124
Number of inputs	4 (differential)
Power supply	via the E-bus
Technology	differential input
Signal type	differential
Signal current	4...20 mA
Distributed clocks	yes
Internal resistance	typ. 85 Ω + diode voltage
Input filter limit frequency	5 kHz

Common-mode voltage UCM	max. 10 V
Conversion time	~ 100 µs
Resolution	16 bit (incl. sign)
Measuring error	< ±0.3 % (relative to full scale value)
Surge voltage resistance	35 V DC
Electrical isolation	500 V (E-bus/signal voltage)
Current consumption power contacts	–
Current consumption E-bus	typ. 130 mA
Bit width in the process image	inputs: 16 byte
Configuration	no address or configuration setting
Special features	standard and compact process image, activatable FIR/IIR filters, limit value monitoring
Weight	approx. 60 g
Operating/storage temperature	-25...+60 °C/-40...+85 °C
Relative humidity	95 %, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protect. rating/installation pos.	IP20/variable
Pluggable wiring	for all ESxxx terminals
Approvals/markings	CE, UL, ATEX, IECEx, cFMus
Ex marking	ATEX: II 3 G Ex nA IIC T4 Gc cFMus: Class I, Division 2, Groups A, B, C, D Class I, Zone 2, AEx ec IIC T4 Gc

Housing data	EL-12-8pin	ES-12-8pin
Design form	compact terminal housing with signal LEDs	terminal housing with pluggable wiring level
Material	polycarbonate	
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm	
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock	
Side by side mounting by means of	double slot and key connection	
Marking	labeling of the BZxxx series	
Wiring	solid conductor (e), flexible conductor (f) and ferrule (a): spring actuation by screwdriver	
Connection cross-section	s*: 0.08...2.5 mm ² , st*: 0.08...2.5 mm ² , f*: 0.14...1.5 mm ²	s*: 0.08...1.5 mm ² , st*: 0.08...1.5 mm ² , f*: 0.14...1.5 mm ²
Connection cross-section AWG	s*: AWG 28...14, st*: AWG 28...14, f*: AWG 26...16	s*: AWG 28...16, st*: AWG 28...16, f*: AWG 26...16

Stripping length	8...9 mm	9...10 mm
Current load power contacts	I _{max} : 10 A	

*s: solid wire; st: stranded wire; f: with ferrule

Ordering Information

Ordering information	
EL3124	EtherCAT Terminal, 4-channel analog input, current, 4...20 mA, 16 bit, differential
ES3124	EtherCAT Terminal, 4-channel analog input, current, 4...20 mA, 16 bit, differential, pluggable wiring