
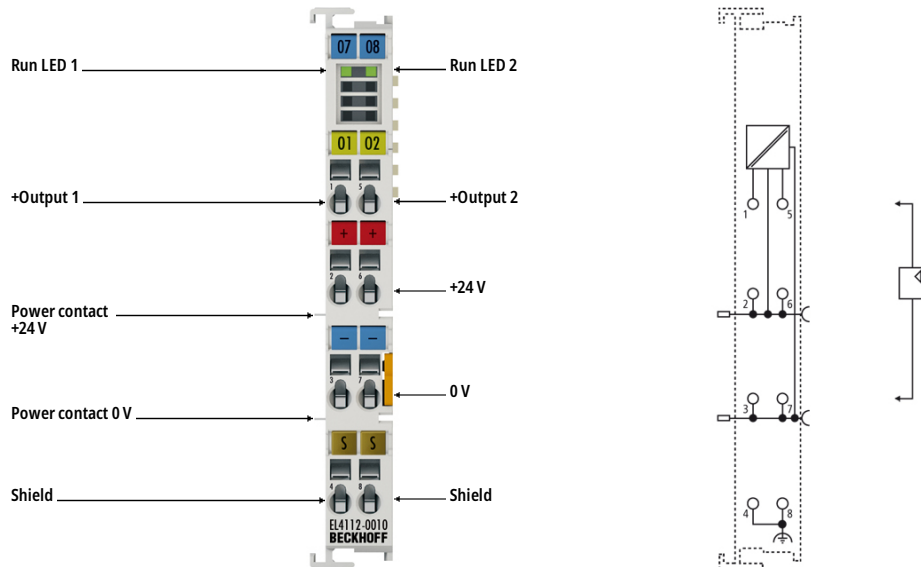


EL4112-0010 | EtherCAT Terminal, 2-channel analog output, current, ± 10 mA, 16 bit



i Product status: Regular delivery

The EL4112-0010 analog output terminal generates analog output signals in the range between -10 and +10 mA. The power is supplied to the process level with a resolution of 16 bits and is electrically isolated. Ground potential for the output channels of an EtherCAT Terminal is common with the 24 V DC supply. The output stages are powered by the 24 V supply. The signal state of the EtherCAT Terminals is indicated by light emitting diodes.

Product information

Technical data

Technical data	EL4112-0010
Connection technology	3-wire, single-ended
Number of outputs	2
Power supply	24 V DC via power contacts
Signal current	-10...+10 mA
Distributed clocks	yes
Distributed clock precision	$\ll 1 \mu\text{s}$
Load	$< 500 \Omega$ (short-circuit proof)
Measuring error	$< \pm 0.1 \%$
Output error	$< 0.1 \%$ (relative to end value)
Resolution	16 bit (incl. sign)

Electrical isolation	500 V (E-bus/signal voltage)
Output rate	max. 15 ksps
Current consumption power contacts	typ. 15 mA + load
Current consumption E-bus	typ. 160 mA
Bit width in the process image	2 x 16 bit AO output
Configuration	no address or configuration setting
Special features	Watchdog parameterizable, user synchronization can be activated.
Weight	approx. 65 g
Operating/storage temperature	0...+55 °C/-25...+85 °C
Relative humidity	95 %, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protect. rating/installation pos.	IP20/variable
Approvals/markings	CE, UL, ATEX
Ex marking	II 3 G Ex nA IIC T4 Gc

Housing data	EL-12-8pin
Design form	compact terminal housing with signal LEDs
Material	polycarbonate
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock
Side by side mounting by means of	double slot and key connection
Marking	labeling of the BZxxx series
Wiring	solid conductor (e), flexible conductor (f) and ferrule (a): spring actuation by screwdriver
Connection cross-section	s*: 0.08...2.5 mm ² , st*: 0.08...2.5 mm ² , f*: 0.14...1.5 mm ²
Connection cross-section AWG	s*: AWG 28...14, st*: AWG 28...14, f*: AWG 26...16
Stripping length	8...9 mm
Current load power contacts	I _{max} : 10 A

*s: solid wire; st: stranded wire; f: with ferrule