
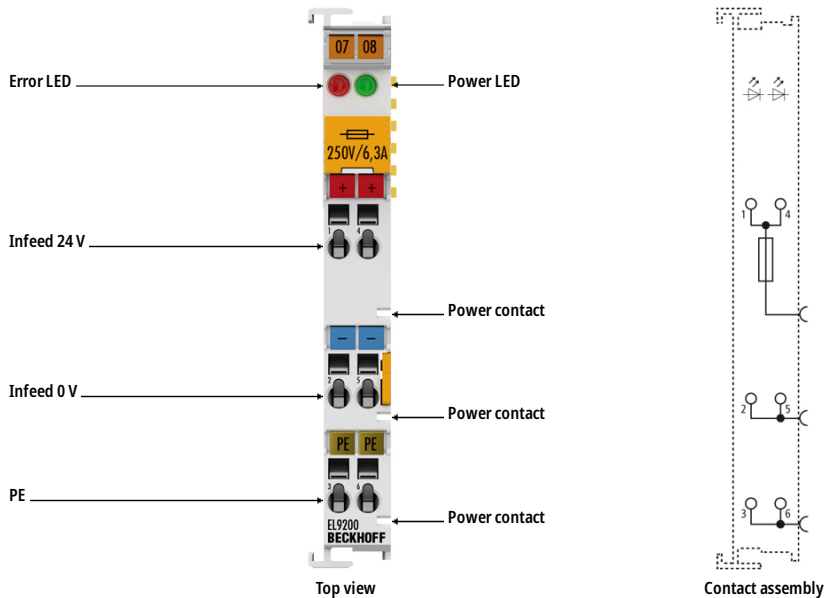


# EL9200 | Potential supply terminal, 24 V DC, with fuse



**i** **Product status:** Regular delivery

The EL9200 potential feed terminal with fuse enables the setup of different potential groups with a fused standard voltage of 24 V DC. The supply voltage is taken up via the front terminal contacts, fused and passed through to the adjacent terminals via the internal power contacts. A Power LED and an Error LED indicate the operating state. The fuse is a 6.3 A fuse, which can be replaced at the front.

## Product information

### Technical data

Technical data	EL9200
Technology	potential supply terminal with fuse
Current load	≤ 10 A
Power LED	green
Defect LED	red
Renewed infeed	yes
Nominal voltage	24 V DC
Integrated fine-wire fuse	...6.3 A
Electrical isolation	500 V (E-bus/field potential)
PE contact	yes

Connection facility to additional power contact	1
Bit width in the process image	0
Housing width	12 mm
Side by side mounting on EtherCAT Terminals with power contact	yes
Side by side mounting on EtherCAT Terminals without power contact	yes
Weight	approx. 50 g
Operating/storage temperature	0...+55 °C/-25...+85 °C
Approvals/markings	CE, UL, ATEX
Ex marking	II 3 G Ex nA IIC T4 Gc

<b>Housing data</b>	<b>EL-12-6pin</b>
Design form	compact terminal housing with signal LEDs
Material	polycarbonate
Dimensions (W x H x D)	12 mm x 100 mm x 70 mm
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock
Side by side mounting by means of	double slot and key connection
Marking	labeling of the BZxxx series
Wiring	solid conductor (e), flexible conductor (f) and ferrule (a): spring actuation by screwdriver
Connection cross-section	s*: 0.08...2.5 mm <sup>2</sup> , st*: 0.08...2.5 mm <sup>2</sup> , f*: 0.14...1.5 mm <sup>2</sup>
Connection cross-section AWG	s*: AWG 28...14, st*: AWG 28...14, f*: AWG 26...16
Current load power contacts	I <sub>max</sub> : 10 A

\*s: solid wire; st: stranded wire; f: with ferrule