
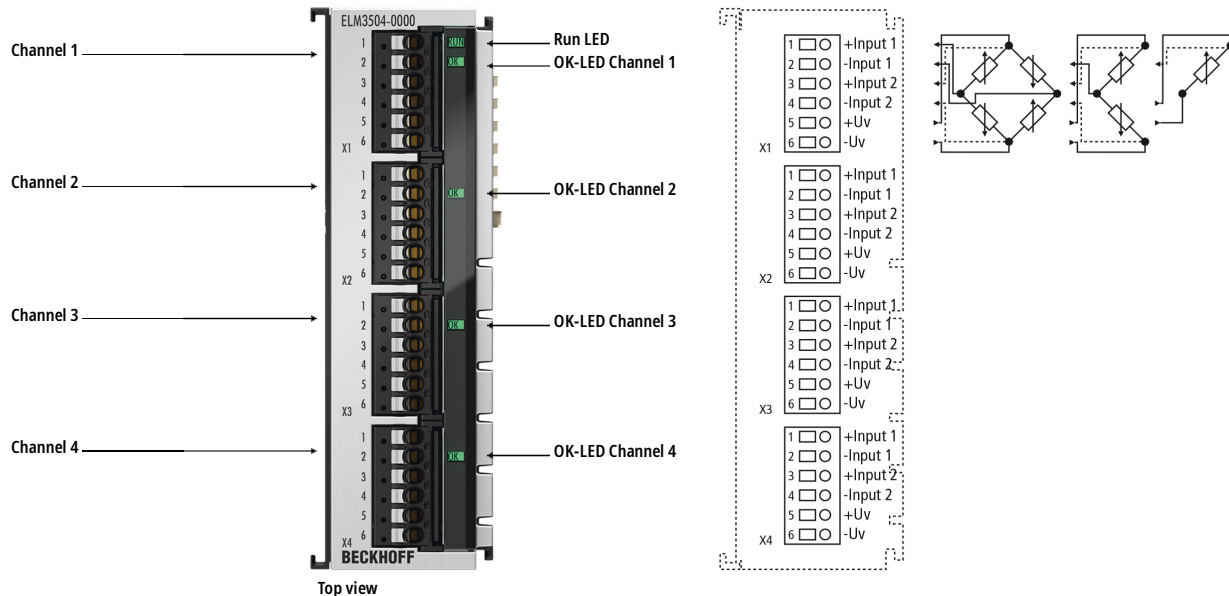


ELM3504-0000 | EtherCAT Terminal, 4-channel analog input, measuring bridge, full/half/quarter bridge, 24 bit, 10 ksps



i Product status: Regular delivery

The ELM350x EtherCAT Terminals are designed for the evaluation of measuring bridges in full-bridge, half-bridge and quarter-bridge configuration. The terminals feature internally switchable supplementary resistors. The feed is integrated. Like all other parameters, the supply voltage is adjustable in the CoE. Irrespective of the signal configuration, all ELM modules have the same technological properties. The ELM350x modules for the evaluation of measuring bridges offer a maximum sampling rate of 10,000 or 20,000 samples per second. The 6-pin plug (push-in) can be removed for maintenance purposes without releasing the individual wires.

Available as variant with factory calibration certificate or ISO 17025-/DAkKS-compliant certificate including Beckhoff recalibration service.

Extensive documentation is available from Beckhoff sales, support or measurement@beckhoff.com.

Product information

Technical data

System data	ELM350x
Strain gauge	quarter bridge (1000/350/120 Ω), half bridge ($\pm 16/8/4/2$ mV/V), full bridge ($\pm 32/8/4/2$ mV/V), internal bridge completion and supply adjustable 0...5 V (2-/3-/4-/5-/6-wire connection), shunt calibration
Voltage measurement	± 10 V, ± 80 mV, 0...10 V
Potentiometer measurement	potentiometer ≥ 1 kΩ, supply integrated and adjustable 0...5 V

Temperature measurement (RTD)	Pt1000
Technical data	ELM3504-0000
Number of channels	4
Technology	resistor bridge, strain gauge
Signal type	differential
Connection technology	2-/3-/4-/5-/6-wire
Connection type	push-in, service plug 6-pin
Max. sampling rate	max. 100 μ s/10 ksp/s (per channel, simultaneously)
Oversampling factor	n = 1...100 selectable (max. 10 ksamples/s)
Internal resistance	> 4 M Ω
Measuring error	typ. < \pm 500 ppm/ \pm 0.05 % in some measuring ranges, relative to the respective full scale value, see documentation
Temperature coefficient	up to typ. < 1 ppm/K in some measuring ranges, see documentation
Functional diagnostics	yes
Connection diagnostics	broken wire/short circuit
Distributed clocks	yes, accuracy << 1 μ s
Resolution	24 bit (incl. sign)
Electrical isolation channel/channel	no
Electrical isolation channel/bus	707 V DC (type test)
Electrical isolation channel/SGND	707 V DC (type test)
Current consumption power contacts	–
Current consumption E-bus	typ. 720 mA
Weight	approx. 350 g
Operating/storage temperature	0...+55 $^{\circ}$ C/-25...+85 $^{\circ}$ C
Thermal dissipation	typ. 3 W
Special features	ExtendedRange 107 %, free numeric filter, TrueRMS, integrator/differentiator, non-linear scaling, PeakHold
Approvals/markings	CE, UL
Housing data	ELM-30-xpin
Design form	metal housing with signal LEDs
Material	zinc die-cast
Dimensions (W x H x D)	30 mm x 100 mm x 95 mm
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock
Side by side mounting by means of	double slot and key connection
Marking	–

Wiring	solid conductors (e): direct plug-in technique; fine-stranded conductors (f) and ferrule (a): spring actuation by screwdriver
Connection cross-section	s*: 0.2...1.5 mm ² , st*: 0.2...1.5 mm ² , f*: 0.25...0.75 mm ²
Connection cross-section AWG	s*: AWG 24...14, st*: AWG 24...14, f*: AWG 24...14
Stripping length	8...9 mm

*s: solid wire; st: stranded wire; f: with ferrule