
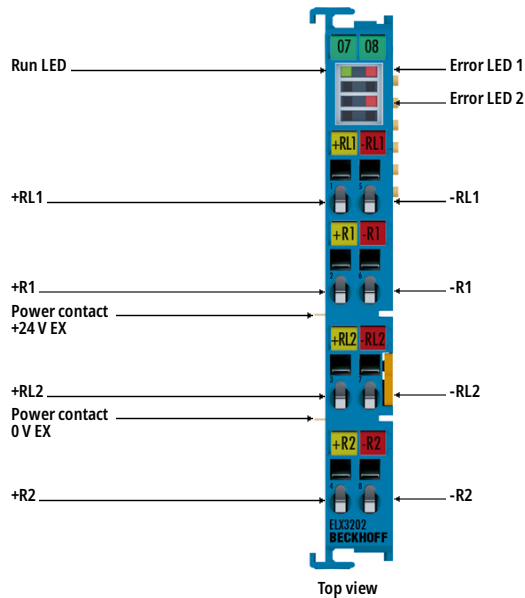


ELX3202 | EtherCAT Terminal, 2-channel analog input, temperature, RTD (Pt100), 16 bit, Ex i



i Product status: Regular delivery

The ELX3202 analog input terminal allows the direct connection of RTDs located in hazardous areas classified Zone 0/20 or 1/21. The circuitry of the ELX3202 can operate sensors with 2-, 3- and 4-wire technology. Linearization is carried out over the entire freely selectable temperature range. By default the terminal is set to Pt100 sensors with 3-wire technology. The ELX3202 terminal indicates signal state and sensor malfunctions (e.g. wire breakage) by means of LEDs.

EtherCAT terminals of the ELX series must always be operated in conjunction with the ELX9560 power supply terminal. This terminal generates an electrically isolated output voltage (24 V EX) from the input voltage (24 V DC) for supplying the subsequent ELX terminals. If a new power supply is required, the combination of an ELX9410 and an ELX9560 can be used so that further ELX terminals can be added. The ELX terminal string must be terminated with one ELX9012 or two ELX9410.

Product information

Technical data

Technical data	ELX3202
Number of inputs	2 (differential)
Power supply	via the E-bus
Connection method	2-, 3-, 4-wire (default: 2-wire)
Temperature range	-200...+850 °C (Pt sensors); -60...+250 °C (Ni sensors), for further types and details see documentation
Resolution	up to 0.01 °C per digit (preset: 0.1 °C per digit)
Measuring current	< 1 mA (depending on sensor and measuring range)

Measuring error	< ±0.3 % (relative to full scale value)
Internal resistance	typ. ≥ 10 kΩ (differential)
Input filter limit frequency	typ. 1 kHz
Sensor types	Pt100, Pt200, Pt500, Pt1000, Ni100, Ni120, Ni1000, resistance measurement (10 Ω...4 kΩ), KT(Y) sensors
Conversion time	10...3300 ms (adjustable, default: 170 ms)
Supply voltage electronics	24 V DC (via power contacts), ELX9560 power supply
Current consumption power contacts	typ. 10 mA
Current consumption E-bus	typ. 70 mA
Special features	limit value monitoring, digital filter and characteristic curve linearization integrated, connection method freely configurable
Weight	approx. 60 g
Operating/storage temperature	-25...+60 °C/-40...+85 °C
Relative humidity	95 %, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protect. rating/installation pos.	IP20/see documentation
Approvals/markings	CE, UL, ATEX, IECEx, cFMus, CCC
Ex marking	<p>ATEX: II 3(1)G Ex ec [ia Ga] IIC T4 Gc II (1)D [Ex ia Da] IIIC I (M1) [Ex ia Ma] I</p> <p>IECEx: Ex ec [ia Ga] IIC T4 Gc [Ex ia Da] IIIC [Ex ia Ma] I</p> <p>cFMus: AIS Class I, II, III, Division 1, Groups A thru G Class I, Division 2, Groups A, B, C, D Class I, Zone 2, AEx ec [ia Ga] IIC T4 Gc [AEx ia Da] IIIC T4</p>

Housing data	ELX-12-8pin
Design form	compact terminal housing with signal LEDs
Material	polycarbonate, blue
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock
Side by side mounting by means of	double slot and key connection
Marking	labeling of the BZxxx series
Wiring	solid conductor (e), flexible conductor (f) and ferrule (a): spring actuation by screwdriver
Connection cross-section	s*: 0.08...2.5 mm ² , st*: 0.08...2.5 mm ² , f*: 0.14...1.5 mm ²

Connection cross-section AWG	s*: AWG 28...14, st*: AWG 28...14, f*: AWG 26...16
Stripping length	8...9 mm
Power contacts	2 blade/spring contacts

*s: solid wire; st: stranded wire; f: with ferrule