


# Inductive sensor

## NJ1,5-8-N-Y18812

■ With special adjustment



### Dimensions



### Technical Data

#### General specifications

Switching function		Normally closed (NC)
Output type		NAMUR
Rated operating distance	$s_n$	1.5 mm
Installation		flush
Assured operating distance	$s_a$	0 ... 0.97 mm
Reduction factor $r_{Al}$		0.4
Reduction factor $r_{Cu}$		0.3
Reduction factor $r_{304}$		0.85
Output type		2-wire

#### Nominal ratings

Nominal voltage	$U_o$	8 V
Switching frequency	$f$	0 ... 2000 Hz
Hysteresis	$H$	0.1 mm
Current consumption		
Measuring plate not detected		min. 2.5 mA
Measuring plate detected		≤ 1.2 mA

#### Functional safety related parameters

MTTF <sub>d</sub>		11467 a
Mission Time (T <sub>M</sub> )		20 a

Release date: 2020-04-30 Date of issue: 2020-04-30 Filename: 106373\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS



## Technical Data

Diagnostic Coverage (DC)	0 %
<b>Compliance with standards and directives</b>	
Standard conformity	
Standards	EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012
<b>Approvals and certificates</b>	
UL approval	cULus Listed, General Purpose
CSA approval	cCSAus Listed, General Purpose
<b>Ambient conditions</b>	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
<b>Mechanical specifications</b>	
Connection type	cable PUR , 6 m
Core cross-section	0.14 mm <sup>2</sup>
Housing material	brass
Sensing face	PBT
Degree of protection	IP67
<b>Cable</b>	
Bending radius	> 10 x cable diameter
<b>General information</b>	
Use in the hazardous area	see instruction manuals

## Connection



# Mounting

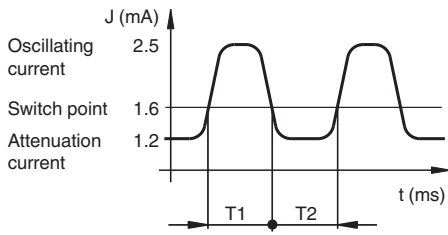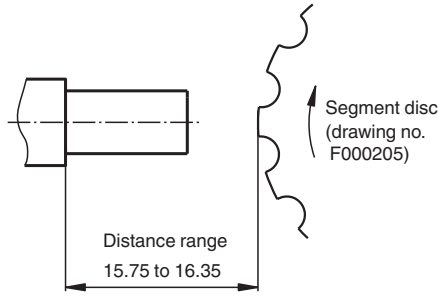

$T1 : T2 = 1 : 5$  to  $5 : 1$

Release date: 2020-04-30 Date of issue: 2020-04-30 Filename: 106373\_eng.pdf