


# Inductive sensor


## NJ2-11-N-G



- 2 mm flush
- Usable up to SIL 2 acc. to IEC 61508

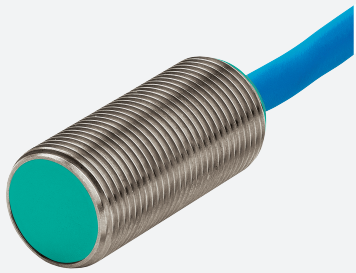

### Dimensions



### Technical Data

#### General specifications

Switching function		Normally closed (NC)
Output type		NAMUR
Rated operating distance	$s_n$	2 mm
Installation		flush
Assured operating distance	$s_a$	0 ... 1.62 mm
Actual operating distance	$s_r$	1.8 ... 2.2 mm
Reduction factor $r_{AI}$		0.4
Reduction factor $r_{Cu}$		0.3
Reduction factor $r_{304}$		0.85
Output type		2-wire

#### Nominal ratings

Nominal voltage	$U_o$	8.2 V ( $R_i$ approx. 1 k $\Omega$ )
Switching frequency	$f$	0 ... 3000 Hz
Hysteresis	$H$	0.5 ... 3.5 typ. 2 %
Current consumption		

Release date: 2020-03-25 Date of issue: 2020-03-30 Filename: 306126\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**pf** PEPPERL+FUCHS

## Technical Data

Measuring plate not detected		min. 3 mA
Measuring plate detected		≤ 1 mA
<b>Functional safety related parameters</b>		
Safety Integrity Level (SIL)		SIL 2
MTTF <sub>d</sub>		5887 a
Mission Time (T <sub>M</sub> )		20 a
Diagnostic Coverage (DC)		0 %
<b>Compliance with standards and directives</b>		
Standard conformity		
NAMUR		EN 60947-5-6:2000 IEC 60947-5-6:1999
Standards		EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012
<b>Approvals and certificates</b>		
EAC conformity		TR CU 012/2011
FM approval		
Control drawing		116-0165
UL approval		
Ordinary Location		E87056
Hazardous Location		E501628
Control drawing		116-0452
CCC approval		CCC approval / marking not required for products rated ≤36 V
<b>Ambient conditions</b>		
Ambient temperature		-25 ... 100 °C (-13 ... 212 °F)
<b>Mechanical specifications</b>		
Connection type		cable PVC , 2 m
Core cross-section		0.34 mm <sup>2</sup>
Housing material		Stainless steel 1.4305 / AISI 303
Sensing face		PVDF
Degree of protection		IP68
Cable		
Bending radius		> 10 x cable diameter
<b>Data for application in connection with hazardous areas</b>		
Equipment protection level		Ga , Gb , Gc (ic) , Da , Mb
<b>Equipment protection level Ga</b>		
Type of protection		intrinsic safety
CE marking		[*PD-Z02585A*]
<b>Certificates</b>		
Appropriate type		NJ2-11-N-G...
ATEX certificate		PTB 00 ATEX 2048 X
ATEX marking		Ⓜ II 1G Ex ia IIC T6...T1 Ga
Standards		EN 60079-0:2012+A11:2013 , EN 60079-11:2012
IECEx certificate		IECEx PTB 11.0037X
IECEx marking		Ex ia IIC T6...T1 Ga
Standards		IEC 60079-0:2011 , IEC 60079-11:2011
Effective internal capacitance	C <sub>i</sub>	max. 30 nF A cable length of 10 m is considered.
Effective internal inductance	L <sub>i</sub>	max. 50 μH A cable length of 10 m is considered.
Maximum permissible ambient temperature	T <sub>amb</sub>	Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values.

Release date: 2020-03-25 Date of issue: 2020-03-30 Filename: 306126\_eng.pdf

Technical Data

for ATEX	<p>at <math>U_i = 16\text{ V}</math> , <math>I_i = 25\text{ mA}</math> , <math>P_i = 34\text{ mW}</math> ,                      T6 : 59 °C (138.2 °F)                      T5 : 71 °C (159.8 °F)                      T4 : 99 °C (210.2 °F)                      T3 : 99 °C (210.2 °F)                      T2 : 99 °C (210.2 °F)                      T1 : 99 °C (210.2 °F)</p> <p>at <math>U_i = 16\text{ V}</math> , <math>I_i = 25\text{ mA}</math> , <math>P_i = 64\text{ mW}</math> ,                      T6 : 56 °C (132.8 °F)                      T5 : 68 °C (154.4 °F)                      T4 : 96 °C (204.8 °F)                      T3 : 96 °C (204.8 °F)                      T2 : 96 °C (204.8 °F)                      T1 : 96 °C (204.8 °F)</p> <p>at <math>U_i = 16\text{ V}</math> , <math>I_i = 52\text{ mA}</math> , <math>P_i = 169\text{ mW}</math> ,                      T6 : 45 °C (113 °F)                      T5 : 57 °C (134.6 °F)                      T4 : 81 °C (177.8 °F)                      T3 : 81 °C (177.8 °F)                      T2 : 81 °C (177.8 °F)                      T1 : 81 °C (177.8 °F)</p> <p>at <math>U_i = 16\text{ V}</math> , <math>I_i = 76\text{ mA}</math> , <math>P_i = 242\text{ mW}</math> ,                      T6 : 37 °C (98.6 °F)                      T5 : 49 °C (120.2 °F)                      T4 : 63 °C (145.4 °F)                      T3 : 63 °C (145.4 °F)                      T2 : 63 °C (145.4 °F)                      T1 : 63 °C (145.4 °F)</p>
----------	--

for IECEx	<p>at <math>U_i = 16\text{ V}</math> , <math>I_i = 25\text{ mA}</math> , <math>P_i = 34\text{ mW}</math> ,                      T6 : 76 °C (168.8 °F)                      T5 : 91 °C (195.8 °F)                      T4 : 100 °C (212 °F)                      T3 : 100 °C (212 °F)                      T2 : 100 °C (212 °F)                      T1 : 100 °C (212 °F)</p> <p>at <math>U_i = 16\text{ V}</math> , <math>I_i = 25\text{ mA}</math> , <math>P_i = 64\text{ mW}</math> ,                      T6 : 73 °C (163.4 °F)                      T5 : 88 °C (190.4 °F)                      T4 : 100 °C (212 °F)                      T3 : 100 °C (212 °F)                      T2 : 100 °C (212 °F)                      T1 : 100 °C (212 °F)</p> <p>at <math>U_i = 16\text{ V}</math> , <math>I_i = 52\text{ mA}</math> , <math>P_i = 169\text{ mW}</math> ,                      T6 : 62 °C (143.6 °F)                      T5 : 77 °C (170.6 °F)                      T4 : 81 °C (177.8 °F)                      T3 : 81 °C (177.8 °F)                      T2 : 81 °C (177.8 °F)                      T1 : 81 °C (177.8 °F)</p> <p>at <math>U_i = 16\text{ V}</math> , <math>I_i = 76\text{ mA}</math> , <math>P_i = 242\text{ mW}</math> ,                      T6 : 54 °C (129.2 °F)                      T5 : 63 °C (145.4 °F)                      T4 : 63 °C (145.4 °F)                      T3 : 63 °C (145.4 °F)                      T2 : 63 °C (145.4 °F)                      T1 : 63 °C (145.4 °F)</p>
-----------	---

Equipment protection level Gb

Type of protection	intrinsic safety	
CE marking	[*PD-Z02585A*]	
Certificates		
Appropriate type	NJ 2-11-N-G...	
ATEX certificate	PTB 00 ATEX 2048 X	
ATEX marking	Ⓜ II 1G Ex ia IIC T6...T1 Ga	
Standards	EN 60079-0:2012+A11:2013 , EN 60079-11:2012	
IECEx certificate	IECEx PTB 11.0037X	
IECEx marking	Ex ia IIC T6...T1 Ga	
Standards	IEC 60079-0:2011 , IEC 60079-11:2011	
Effective internal capacitance	$C_i$	max. 30 nF A cable length of 10 m is considered.
Effective internal inductance	$L_i$	max. 50 µH A cable length of 10 m is considered.

Release date: 2020-03-25 Date of issue: 2020-03-30 Filename: 306126\_eng.pdf

Technical Data

Maximum permissible ambient temperature	$T_{amb}$	<p>Also observe the maximum permissible ambient temperature stated in the general technical data.                      Keep to the lower of the two values.                      at <math>U_i = 16\text{ V}</math>, <math>I_i = 25\text{ mA}</math>, <math>P_i = 34\text{ mW}</math>,                      T6: 76 °C (168.8 °F)                      T5: 91 °C (195.8 °F)                      T4: 100 °C (212 °F)                      T3: 100 °C (212 °F)                      T2: 100 °C (212 °F)                      T1: 100 °C (212 °F)                      at <math>U_i = 16\text{ V}</math>, <math>I_i = 25\text{ mA}</math>, <math>P_i = 64\text{ mW}</math>,                      T6: 73 °C (163.4 °F)                      T5: 88 °C (190.4 °F)                      T4: 100 °C (212 °F)                      T3: 100 °C (212 °F)                      T2: 100 °C (212 °F)                      T1: 100 °C (212 °F)                      at <math>U_i = 16\text{ V}</math>, <math>I_i = 52\text{ mA}</math>, <math>P_i = 169\text{ mW}</math>,                      T6: 62 °C (143.6 °F)                      T5: 77 °C (170.6 °F)                      T4: 81 °C (177.8 °F)                      T3: 81 °C (177.8 °F)                      T2: 81 °C (177.8 °F)                      T1: 81 °C (177.8 °F)                      at <math>U_i = 16\text{ V}</math>, <math>I_i = 76\text{ mA}</math>, <math>P_i = 242\text{ mW}</math>,                      T6: 54 °C (129.2 °F)                      T5: 63 °C (145.4 °F)                      T4: 63 °C (145.4 °F)                      T3: 63 °C (145.4 °F)                      T2: 63 °C (145.4 °F)                      T1: 63 °C (145.4 °F)</p>
---	-----------	---

Equipment protection level Gc (ic)

Type of protection	intrinsic safety	
CE marking	[*PD-Z02586A*]	
Certificates		
ATEX certificate	PF13CERT2895 X	
ATEX marking	⊕ II 3G Ex ic IIC T6...T1 Gc	
Standards	EN 60079-0:2012+A11:2013, EN 60079-11:2012	
Effective internal capacitance	$C_i$	max. 30 nF A cable length of 10 m is considered.
Effective internal inductance	$L_i$	max. 50 µH A cable length of 10 m is considered.

Maximum permissible ambient temperature	$T_{amb}$	<p>Also observe the maximum permissible ambient temperature stated in the general technical data.                      Keep to the lower of the two values.                      at <math>U_i = 20\text{ V}</math>, <math>I_i = 25\text{ mA}</math>, <math>P_i = 34\text{ mW}</math>,                      T6: 55 °C (131 °F)                      T5: 55 °C (131 °F)                      T4: 55 °C (131 °F)                      T3: 55 °C (131 °F)                      T2: 55 °C (131 °F)                      T1: 55 °C (131 °F)                      at <math>U_i = 20\text{ V}</math>, <math>I_i = 25\text{ mA}</math>, <math>P_i = 64\text{ mW}</math>,                      T6: 55 °C (131 °F)                      T5: 55 °C (131 °F)                      T4: 55 °C (131 °F)                      T3: 55 °C (131 °F)                      T2: 55 °C (131 °F)                      T1: 55 °C (131 °F)                      at <math>U_i = 20\text{ V}</math>, <math>I_i = 52\text{ mA}</math>, <math>P_i = 169\text{ mW}</math>,                      T6: 52 °C (125.6 °F)                      T5: 52 °C (125.6 °F)                      T4: 52 °C (125.6 °F)                      T3: 52 °C (125.6 °F)                      T2: 52 °C (125.6 °F)                      T1: 52 °C (125.6 °F)                      at <math>U_i = 20\text{ V}</math>, <math>I_i = 76\text{ mA}</math>, <math>P_i = 242\text{ mW}</math>,                      T6: 44 °C (111.2 °F)                      T5: 44 °C (111.2 °F)                      T4: 44 °C (111.2 °F)                      T3: 44 °C (111.2 °F)                      T2: 44 °C (111.2 °F)                      T1: 44 °C (111.2 °F)</p>
---	-----------	---

Equipment protection level Da


Type of protection	intrinsic safety	
CE marking	[*PD-Z02585A*]	
Certificates		
Appropriate type	NJ 2-11-N-G...	

Release date: 2020-03-25 Date of issue: 2020-03-30 Filename: 306126\_eng.pdf

**Technical Data**

ATEX certificate	PTB 00 ATEX 2048 X	
ATEX marking	Ⓔ II 1D Ex ia IIIC T135°C Da	
Standards	EN 60079-0:2012+A11:2013 , EN 60079-11:2012	
IECEX certificate	IECEX PTB 11.0037X	
IECEX marking	Ex ia IIIC T135°C Da	
Standards	IEC 60079-0:2011 , IEC 60079-11:2011	
Effective internal capacitance	$C_i$	max. 30 nF A cable length of 10 m is considered.
Effective internal inductance	$L_i$	max. 50 $\mu$ H A cable length of 10 m is considered.
Maximum permissible ambient temperature	$T_{amb}$	Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values. at $U_i = 16\text{ V}$ , $I_i = 25\text{ mA}$ , $P_i = 34\text{ mW}$ : 100 °C (212 °F) at $U_i = 16\text{ V}$ , $I_i = 25\text{ mA}$ , $P_i = 64\text{ mW}$ : 100 °C (212 °F) at $U_i = 16\text{ V}$ , $I_i = 52\text{ mA}$ , $P_i = 169\text{ mW}$ : 81 °C (177.8 °F) at $U_i = 16\text{ V}$ , $I_i = 76\text{ mA}$ , $P_i = 242\text{ mW}$ : 63 °C (145.4 °F)
<b>Equipment protection level Mb</b>		
Type of protection	intrinsic safety	
Certificates		
Appropriate type	NJ 2-11-N-G...	
IECEX certificate	IECEX PTB 11.0037X	
IECEX marking	Ex ia I Mb	
Standards	IEC 60079-0:2011 , IEC 60079-11:2011	
Effective internal capacitance	$C_i$	max. 30 nF A cable length of 10 m is considered.
Effective internal inductance	$L_i$	max. 50 $\mu$ H A cable length of 10 m is considered.
Maximum permissible ambient temperature	$T_{amb}$	Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values. at $U_i = 16\text{ V}$ , $I_i = 25\text{ mA}$ , $P_i = 34\text{ mW}$ : 100 °C (212 °F) at $U_i = 16\text{ V}$ , $I_i = 25\text{ mA}$ , $P_i = 64\text{ mW}$ : 100 °C (212 °F) at $U_i = 16\text{ V}$ , $I_i = 52\text{ mA}$ , $P_i = 169\text{ mW}$ : 81 °C (177.8 °F) at $U_i = 16\text{ V}$ , $I_i = 76\text{ mA}$ , $P_i = 242\text{ mW}$ : 63 °C (145.4 °F)
<b>General information</b>		
Use in the hazardous area	see instruction manuals	

**Connection**



Release date: 2020-03-25 Date of issue: 2020-03-30 Filename: 306126\_eng.pdf