

TSXAEY800C

analog input module - 8 high level input - current, voltage - 12 bits

Product availability : Stock - Normally stocked in distribution facility

Price* : 2432.25 USD



Main

Range of product	Modicon Premium Automation platform
Product or component type	Analog input module
Input level	High level
Analogue input number	8
Analogue input type	Current 0...20 mA Current 4...20 mA Voltage +/- 10 V Voltage 0...10 V Voltage 0...5 V Voltage 1...5 V
Analog/Digital conversion	12 bits

Complementary

Nominal read cycle time	27 ms
Fast read cycle time	3 ms + 3 ms x number of channels used
Measurement error	0.15 % of full scale 0...5 V 25 °C 0.15 % of full scale 1...5 V 25 °C 0.19 % of full scale +/- 10 V 25 °C 0.19 % of full scale 0...10 V 25 °C 0.22 % of full scale +/- 10 V 0...60 °C 0.22 % of full scale 0...10 V 0...60 °C 0.22 % of full scale 0...5 V 0...60 °C 0.22 % of full scale 1...5 V 0...60 °C 0.25 % of full scale 0...20 mA 25 °C 0.25 % of full scale 4...20 mA 25 °C 0.41 % of full scale 0...20 mA 0...60 °C 0.41 % of full scale 4...20 mA 0...60 °C
Isolation between channels and bus	1000 Vrms
Isolation between channels and ground	1000 Vrms
Isolation between channels	Common point

Common mode between channels	None
Input overvoltage protection	-15...15 V at state 0 250 Ohm -30...30 V at state 1 250 Ohm
Electrical connection	1 connector SUB-D 25
Overcurrent	-30...30 mA at state 1 250 kOhm
Marking	CE
Current consumption	270 mA 5 V DC
Module format	Standard
Product weight	0.68 lb(US) (0.31 kg)

Environment

Standards	IEC 1131
Product certifications	RMRS BV GL DNV RINA LR ABS
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-13...158 °F (-25...70 °C)
Relative humidity	10...95 % without condensation for operation 5...95 % without condensation for storage
Operating altitude	0...6561.68 ft (0...2000 m)
Protective treatment	TC Conformal coating Humiseal 1A33
IP degree of protection	IP20
Pollution degree	2

Ordering and shipping details

Category	22558 - TSX PREMIUM, ATRIUM & PL7 PRO
Discount Schedule	PC22
Nbr. of units in pkg.	1
Package weight(Lbs)	1
Returnability	N
Country of origin	FR

Offer Sustainability


Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 0849 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product end of life instructions	Need no specific recycling operations

Contractual warranty

Warranty period	18 months
-----------------	-----------

Standard and Extendable Racks for Modules Mounting


Dimensions of Modules and Racks

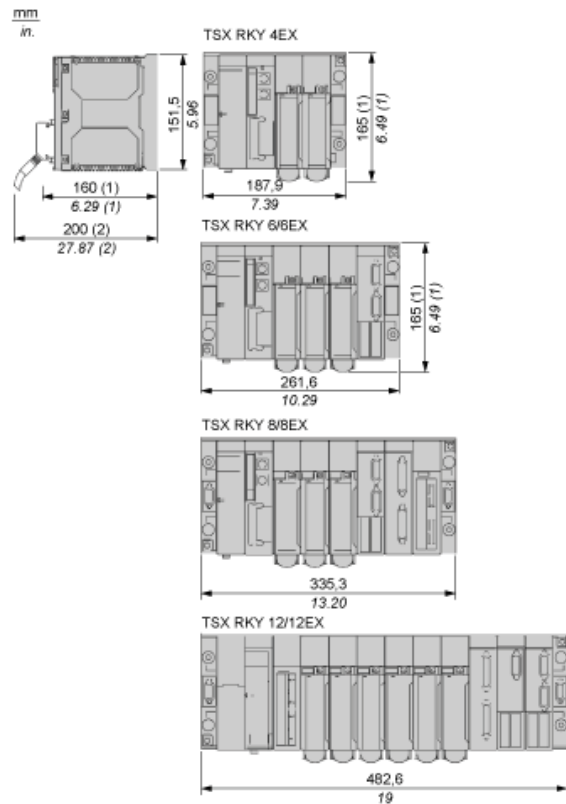

- (1) With screw terminal block modules.
- (2) Maximum depth for all types of modules and their associated connectors.

Analog Input Module (8-Channel, Voltage/Current)

Connector Pin Assignment

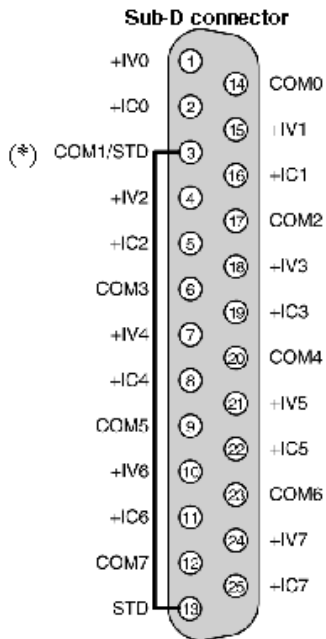

+IVx + pole voltage input for channel x

+ICx + pole current input for channel x

COMx - pole voltage or current input for channel x

(*) STD The strap between pins 3 and 13 enables any removal of the connector to be detected.

NOTE: The COMx pins are connected internally in the module.