

Product availability : Stock - Normally stocked in distribution facility

Price\* : 1472.00 USD



### Main

Range of product	Modicon TSX Micro automation platform
Product or component type	Discrete solid state I/O base DC
Discrete input number	32 1 HE-10 connector
Discrete input voltage	24 V DC positive
Discrete input current	3.5 mA
Discrete input type	Current sink
Discrete output number	32 1 HE-10 connector
Discrete output voltage	24 V DC
Discrete output current	0.1 mA
Discrete output logic	Positive

### Complementary

Input voltage limits	$\geq 11$ V at state 1 $< 5$ V at state 0
Current state 0 guaranteed	$\leq 1.5$ mA
Current state 1 guaranteed	$\geq 2.5$ mA
Input impedance	6.3 Ohm
Response time	0.1...7.5 ms from state 1 to state 0 input 0.1...7.5 ms from state 0 to state 1 input $< 2.5$ ms from state 1 to state 0 output $< 2.5$ ms from state 0 to state 1 output
Input compatibility	2-wire/3-wire proximity sensor
Current consumption	197 mA
Power dissipation in W	3.5 W by module output 0.15 W by channel output 5 W input
Output voltage limits	19...30 V
Output current limits	0.25 A
Leakage current	$\leq 0.1$ mA at state 0

[Ures] residual voltage	<= 1.5 V
Load impedance ohmic	220 Ohm
Switching frequency	< 0.5/LI <sup>2</sup> Hz
Output overvoltage protection	By zener diode
Output short-circuit protection	By current limiter and electronic circuit breaker
Reverse polarity protection	Reverse diode on power supply
Paralleling of outputs	Yes : 3 maximum
Isolation voltage	1500 V 1 s
Product weight	0.9 lb(US) (0.41 kg)

## Environment

Standards	IEC 1131-2 Type 1
-----------	-------------------

## Ordering and shipping details

Category	22556 - TSX MICRO, PL7 MICRO & ACCESS
Discount Schedule	PC14
GTIN	00785901540472
Nbr. of units in pkg.	1
Package weight(Lbs)	1.1100000000000001
Returnability	Y
Country of origin	FR

## Offer Sustainability


Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Will not be compliant Will not be compliant
Product environmental profile	Available

## Contractual warranty

Warranty period	18 months
-----------------	-----------

Sensors/Inputs and Actuators/Outputs Connections

Wiring Diagram

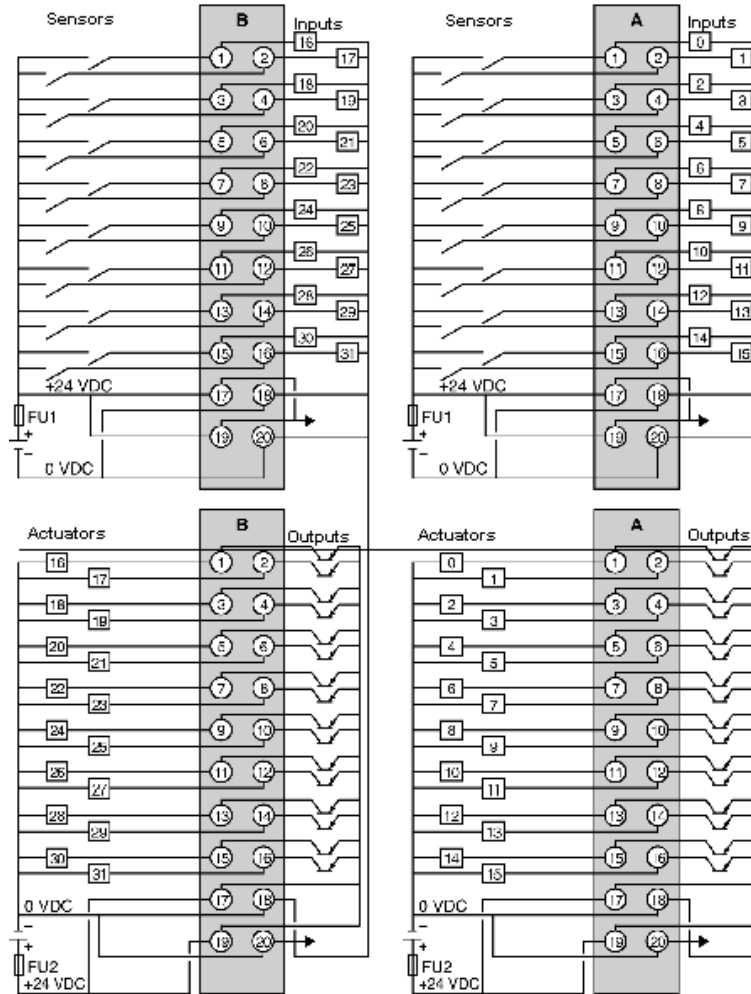

FU1 = 0.5A fuse with rapid fusion.

FU2 = 2A fuse with rapid fusion.