


TSXRKY4EXC

extendable rack - for multi-racks configuration - 4 slots - IP20

Product availability : Non-Stock - Not normally stocked in distribution facility

Price* : 724.50 USD

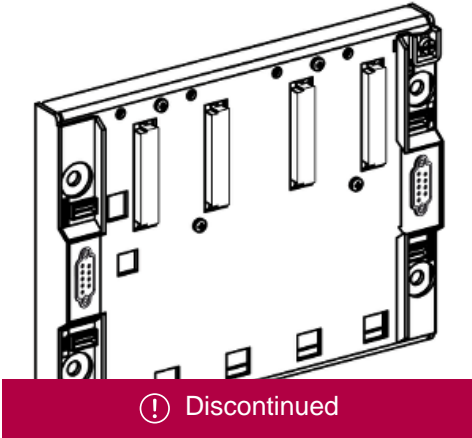

Main

Range of product	Modicon Premium Automation platform
Product or component type	Extendable rack
Product specific application	For multi-racks configuration

Complementary

Number of slots	4
Product compatibility	Specific application module I/O module TSXP57 processor TSXPSY power supply
Electrical connection	2 connectors female SUB-D 9 remote connection of bus X)
Fixing mode	By 4 M6 screws panel) By clips 35 mm symmetrical DIN rail)
Marking	CE
Net Weight	2.56 lb(US) (1.16 kg)

Environment

Standards	UL 508 92/31/EEC 73/23/EEC CSA C22.2 No 213 Class I Division 2 Group D CSA C22.2 No 213 Class I Division 2 Group B CSA C22.2 No 213 Class I Division 2 Group A 93/68/EEC CSA C22.2 No 213 Class I Division 2 Group C CSA C22.2 No 142 89/336/EEC IEC 61131-2
Product certifications	DNV LR BV RMRS ABS RINA GL

* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-13...158 °F (-25...70 °C)
Relative humidity	10...95 % without condensation for operation 5...95 % without condensation for storage
Operating altitude	0...6561.68 ft (0...2000 m)
Protective treatment	TC Conformal coating Humiseal 1A33
IP degree of protection	IP20
Pollution degree	2

Ordering and shipping details

Category	22558 - TSX PREMIUM, ATRIUM & PL7 PRO
Discount Schedule	PC22
GTIN	03595863940114
Nbr. of units in pkg.	1
Package weight(Lbs)	2.21 lb(US) (1.00 kg)
Returnability	No
Country of origin	FR


Packing Units

Package 1 Height	2.17 in (55.000 mm)
Package 1 width	8.07 in (205.000 mm)
Package 1 Length	10.83 in (275.000 mm)

Contractual warranty

Warranty	18 months
----------	-----------

TSXRKY4EXC is replaced by:



Harsh environment BMXXBP0400H

ruggedized rack M340 - 4 slots - panel, plate or DIN rail mounting

Qty 1

Reason for Substitution: End of life | Substitution date: 31 December 2017