


Product data sheet  
Characteristics

TSXRKY6C  
non-extendable rack - for single rack configuration  
- 6 slots - IP20

Price\* : 621.00 USD

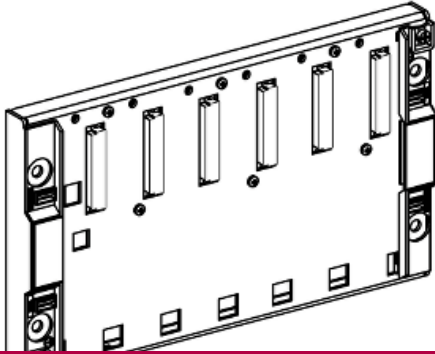

⚠ Discontinued

Commercial status

Discontinued on: 31 December 2017

To be end-of-service on: 31 December 2025

Main

|                              |                                     |
|------------------------------|-------------------------------------|
| Range of product             | Modicon Premium Automation platform |
| Product or component type    | Non-extendable rack                 |
| Product specific application | For single rack configuration       |

Complementary

|                       |  |
|-----------------------|--|
| Number of slots       | 6  |
| Product compatibility | TSXP57 processor<br>TSXPSY power supply<br>Specific application module<br>I/O module |
| Fixing mode           | By 4 M6 screws panel)<br>By clips 35 mm symmetrical DIN rail)                        |
| Marking               | CE   |
| Net Weight            | 3.24 lb(US) (1.47 kg)  |

Environment

|                                       |  |
|---------------------------------------|--|
| Standards                             | CSA C22.2 No 142<br>IEC 61131-2<br>89/336/EEC<br>CSA C22.2 No 213 Class I Division 2 Group B<br>CSA C22.2 No 213 Class I Division 2 Group C<br>UL 508<br>93/68/EEC<br>CSA C22.2 No 213 Class I Division 2 Group A<br>73/23/EEC<br>CSA C22.2 No 213 Class I Division 2 Group D<br>92/31/EEC |
| Product certifications                | BV<br>LR<br>ABS<br>GL<br>RINA<br>RMRS<br>DNV   |
| Ambient air temperature for operation | 32...140 °F (0...60 °C)  |
| Ambient air temperature for storage   | -13...158 °F (-25...70 °C)   |

\* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

|                         |   |
|-------------------------|---|
| Relative humidity       | 10...95 % without condensation for operation<br>5...95 % without condensation for storage |
| Operating altitude      | 0...6561.68 ft (0...2000 m)   |
| Protective treatment    | TC<br>Conformal coating Humiseal 1A33   |
| IP degree of protection | IP20  |
| Pollution degree        | 2   |

### Ordering and shipping details

|                     |                                     |
|---------------------|-------------------------------------|
| Category            | 22558-TSX PREMIUM, ATRIUM & PL7 PRO |
| Discount Schedule   | PC22                                |
| GTIN                | 03595863937862                      |
| Package weight(Lbs) | 2.84 lb(US) (1.286 kg)              |
| Returnability       | No                                  |
| Country of origin   | FR                                  |

### Packing Units

|                  |                       |
|------------------|-----------------------|
| Package 1 Height | 2.05 in (52.000 mm)   |
| Package 1 width  | 8.07 in (205.000 mm)  |
| Package 1 Length | 13.78 in (350.000 mm) |

### Offer Sustainability

|                           |  |
|---------------------------|--|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a> |
|---------------------------|--|

### Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

### TSXRKY6C is replaced by:



#### Harsh environment BMXXBP0800H

ruggedized rack M340 - 8 slots - panel, plate or DIN rail mounting

Qty 1

Reason for Substitution: End of life | Substitution date: 31 December 2017