

Product availability : Non-Stock - Not normally stocked in distribution facility



Commercial status

Discontinued on: 02 December 2020

To be end-of-service on: 31 December 2027

TSXSCP111 has not been replaced. Please contact your customer care center for more information.

ⓘ Restricted Sales for Services

Main

Range of product	Modicon Premium Automation platform
Accessory / separate part category	Communication accessories
Accessory / separate part type	PCMCIA card
Product compatibility	TSXSCY21601 TSX37-21/22
Accessory / separate part destination	Premium processor Atrium co-processor

Complementary

Memory type	PCMCIA card type III
Physical interface	RS232 D
Communication port protocol	Uni-Telway Character mode Modbus
Current consumption	140 mA 5 V DC
Net Weight	0.23 lb(US) (0.105 kg)

Ordering and shipping details

Category	22556 - TSX MICRO, PL7 MICRO & ACCESS
Discount Schedule	PC14
GTIN	00785901602736
Nbr. of units in pkg.	1
Package weight(Lbs)	0.39 lb(US) (0.18 kg)
Returnability	No
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.38 in (3.5 cm)
Package 1 width	6.10 in (15.5 cm)
Package 1 Length	6.69 in (17 cm)
Unit Type of Package 2	S02
Number of Units in Package 2	8
Package 2 Weight	3.85 lb(US) (1.746 kg)
Package 2 Height	5.91 in (15 cm)
Package 2 width	11.81 in (30 cm)
Package 2 Length	15.75 in (40 cm)

Offer Sustainability

Sustainable offer status	Green Premium product
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


Contractual warranty

Warranty	18 months
----------	-----------

Point to Point Connection in Character Mode (DTE to DTE)

Cabling Accessories

The RS 232 physical support card is inserted either in the processor or in the TSXSCY21601 module. It can be connected to a DTE (Data Terminal Equipment) such as a terminal or a printer through a TSXSCPCD1030 or a TSXSCPCD1100 cable.

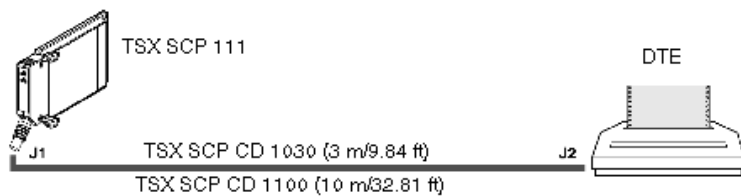

Connection to a Uni-Telway, Modbus or Character Mode DCE

Cabling Accessories

The PCMCIA card can be connected to a Uni-Telway, Modbus or Character Mode DCE (Data Circuit-terminating Equipment) such as a modem through a TSXSCPCC1030 cable.

