

Product availability : Non-Stock - Not normally stocked in distribution facility



Commercial status

Discontinued on: 02 December 2020

To be end-of-service on: 31 December 2027

TSXSCP114 has not been replaced. Please contact your customer care center for more information.

ⓘ Restricted Sales for Services

Main

Range of product	Modicon Premium Automation platform
Accessory / separate part category	Communication accessories
Accessory / separate part type	PCMCIA card
Product compatibility	TSX37-21/22 TSXSCY21601
Accessory / separate part destination	Atrium co-processor Premium processor

Complementary

Memory type	PCMCIA card type III
Physical interface	RS485
Communication port protocol	Modbus Character mode Uni-Telway
Current consumption	150 mA 5 V DC
Net Weight	0.23 lb(US) (0.105 kg)

Ordering and shipping details

Category	22556 - TSX MICRO, PL7 MICRO & ACCESS
Discount Schedule	PC14
GTIN	00785901602750
Nbr. of units in pkg.	1
Package weight(Lbs)	0.4 lb(US) (0.18 kg)
Returnability	No
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.38 in (3.5 cm)
Package 1 width	6.10 in (15.5 cm)
Package 1 Length	6.69 in (17 cm)
Unit Type of Package 2	S02
Number of Units in Package 2	8
Package 2 Weight	4.20 lb(US) (1.903 kg)
Package 2 Height	5.91 in (15 cm)
Package 2 width	11.81 in (30 cm)
Package 2 Length	15.75 in (40 cm)

Offer Sustainability


Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to www.p65warnings.ca.gov
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Contractual warranty

Warranty	18 months
----------	-----------


Connection to the Uni-Telway Network

Connection via a TSXSACA50 T-Junction Box

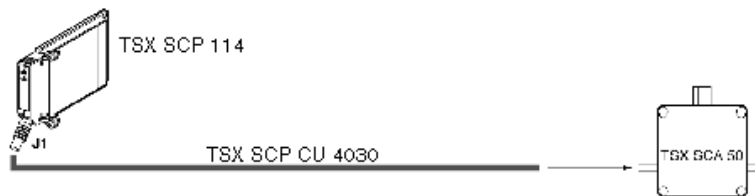


NOTE: The branching device configures the wiring system of the card.

Connection via a TSXSACA62 Y-Junction Box

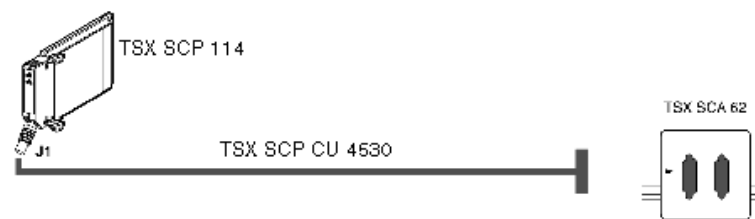

Connecting to the Modbus Bus

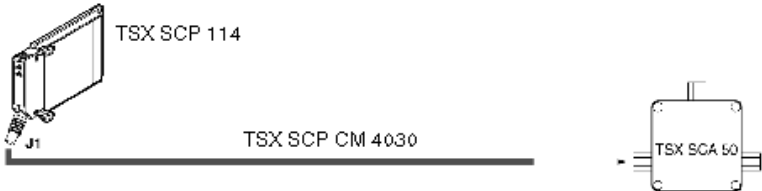

Multi-Protocol Asynchronous Link Connection

Cabling Accessories

Connecting the PCMCIA card in Character Mode does not require any specific accessories.

Connecting the PCMCIA card to an RS 485 or an RS 422 network requires a TSXSCPCX4030 cable (3 m/9.84 ft).

Below illustration shows the PCMCIA card connected in point to point to an RS 422A standard device VAX station type.

