

# Product data sheet

## Characteristics

# TSXSCP114C

PCMCIA card type III - for Atrium co-processor/  
Premium processor - RS485

Product availability : Non-Stock - Not normally stocked in distribution facility

Price\* : 707.25 USD



⚠ Discontinued

### Main

Range of product	Modicon Premium Automation platform
Accessory / separate part category	Communication accessories
Accessory / separate part type	PCMCIA card
Product compatibility	TSXSCY21601 TSX37-21/22
Accessory / separate part destination	Atrium co-processor Premium processor

### Complementary

Memory type	PCMCIA card type III
Physical interface	RS485
Communication port protocol	Uni-Telway Modbus Character mode
Current consumption	150 mA 5 V DC
Net Weight	0.23 lb(US) (0.105 kg)

### Environment

Protective treatment	Conformal coating Humiseal 1A33
----------------------	---------------------------------

### Ordering and shipping details

Category	22558 - TSX PREMIUM, ATRIUM & PL7 PRO
Discount Schedule	PC22
GTIN	03595863960273
Nbr. of units in pkg.	1
Package weight(Lbs)	1 lb(US) (0.45 kg)
Returnability	No
Country of origin	FR

\* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

**Packing Units**

---

Package 1 Height	1.38 in (35.000 mm)
Package 1 width	6.10 in (155.000 mm)
Package 1 Length	6.69 in (170.000 mm)

---

**Contractual warranty**

---

Warranty	18 months
----------	-----------


---

---

## Connection to the Uni-Telway Network


---

### Connection via a TSXSACA50 T-Junction Box

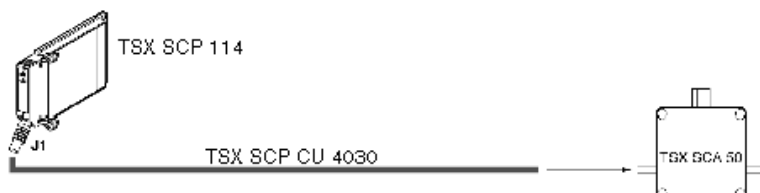

NOTE: The branching device configures the wiring system of the card.


### Connection via a TSXSACA62 Y-Junction Box

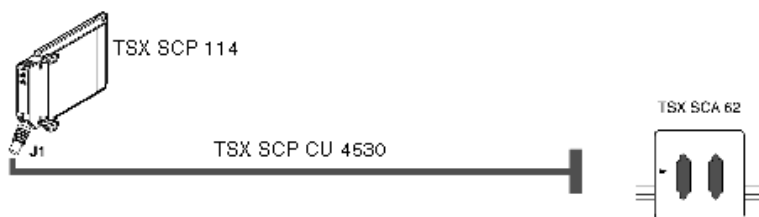

---

Connecting to the Modbus Bus

---

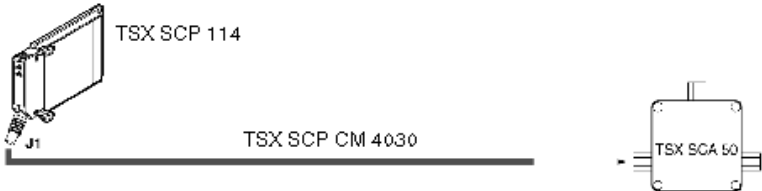

---

## Multi-Protocol Asynchronous Link Connection

---

### Cabling Accessories

Connecting the PCMCIA card in Character Mode does not require any specific accessories.

Connecting the PCMCIA card to an RS 485 or an RS 422 network requires a TSXSCPCX4030 cable (3 m/9.84 ft).

Below illustration shows the PCMCIA card connected in point to point to an RS 422A standard device VAX station type.

