

AC1306




AS-Interface PROFIBUS DP gateway

ControllerE 2Mstr DP RS232

Article no longer available - archive entry

Alternative articles: AC1366

When selecting an alternative article and accessories please note that technical data may differ!

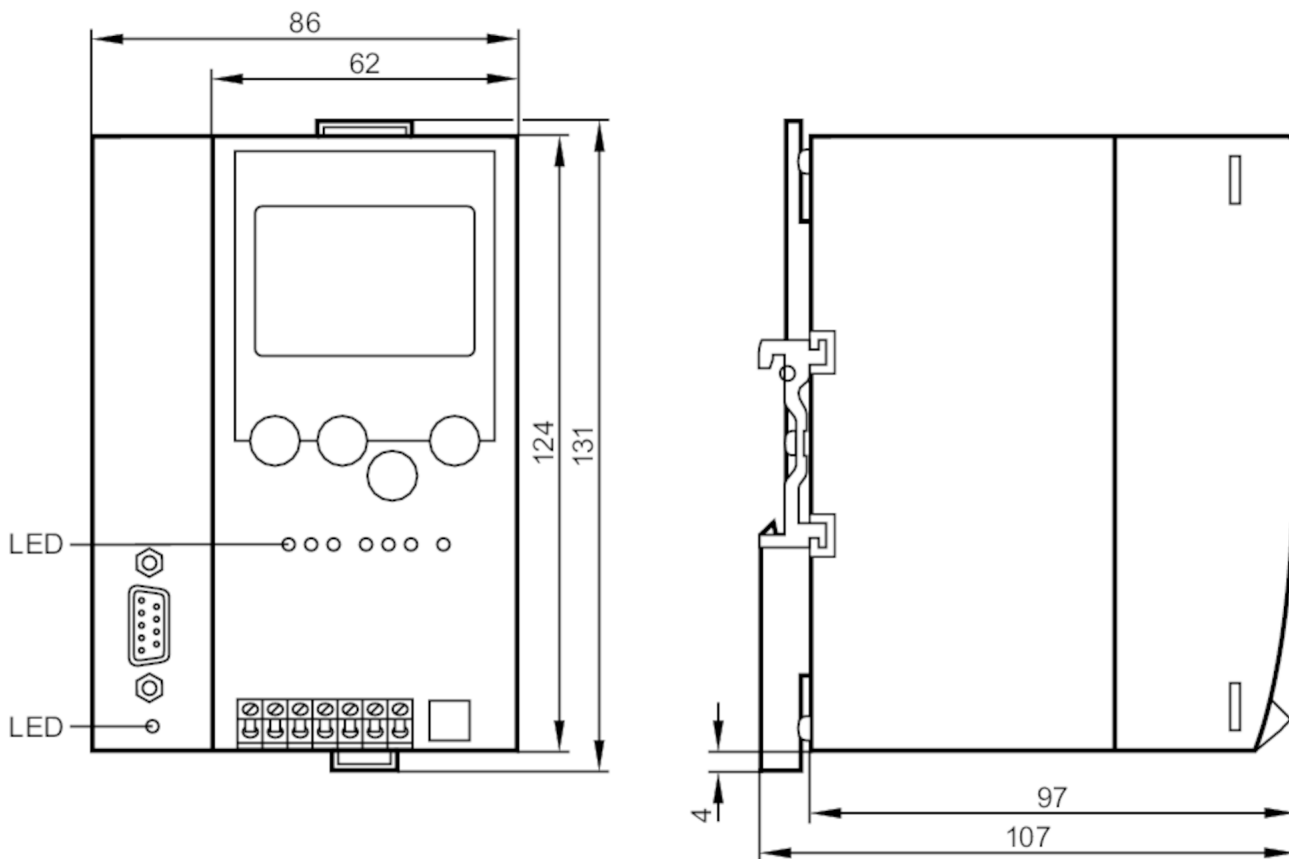

1 Display



Application

Application: decentralized controller; PROFIBUS DP gateway

Electrical data

Operating voltage	[V]	24 DC; (cULus - Class 2 source required)
Insulation rating	[V]	500
Current consumption	[mA]	< 500
Max. current consumption from AS-i	[mA]	10
Max. power consumption	[VA]	10
Number of AS-i masters		2
Electrical separation		yes

Interfaces

Communication interface: RS232; PROFIBUS

AC1306



AS-Interface PROFIBUS DP gateway

ControllerE 2Mstr DP RS232

PROFIBUS		
Transmission standard	EN 50170	
Transmission rate	12 MBaud	
Protocol	Profibus DP	
Usage type	Data transmission	
Note on interfaces		Diagnostic function
RS232		
Number of R232 interfaces	1	
Transmission rate	9600...115200 Baud	
Type of connector	RJ11	
Usage type	Programming	
Note on interfaces		electrically isolated
Operating conditions		
Ambient temperature	[°C]	0...60
Storage temperature	[°C]	-20...70
Max. relative air humidity	[%]	95
Protection		IP 20
Tests / approvals		
MTTF	[years]	57
AS-i classification		
AS-i version	2.1	
AS-i profile	M3	
AS-i certificate	61104	
Mechanical data		
Weight	[g]	557
Housing	housing for DIN rail mounting	
Material	aluminum; steel sheet galvanised	
Displays / operating elements		
Display	Function	3 x LED, red
		3 x LED, green
		3 x LED, yellow
		full graphic LCD display
Remarks		
Pack quantity	1 pcs.	

AC1306



AS-Interface PROFIBUS DP gateway

ControllerE 2Mstr DP RS232

Electrical connection

Connection

