


AC2434



AS-Interface CompactLine module

CompactM12 4DI no IR

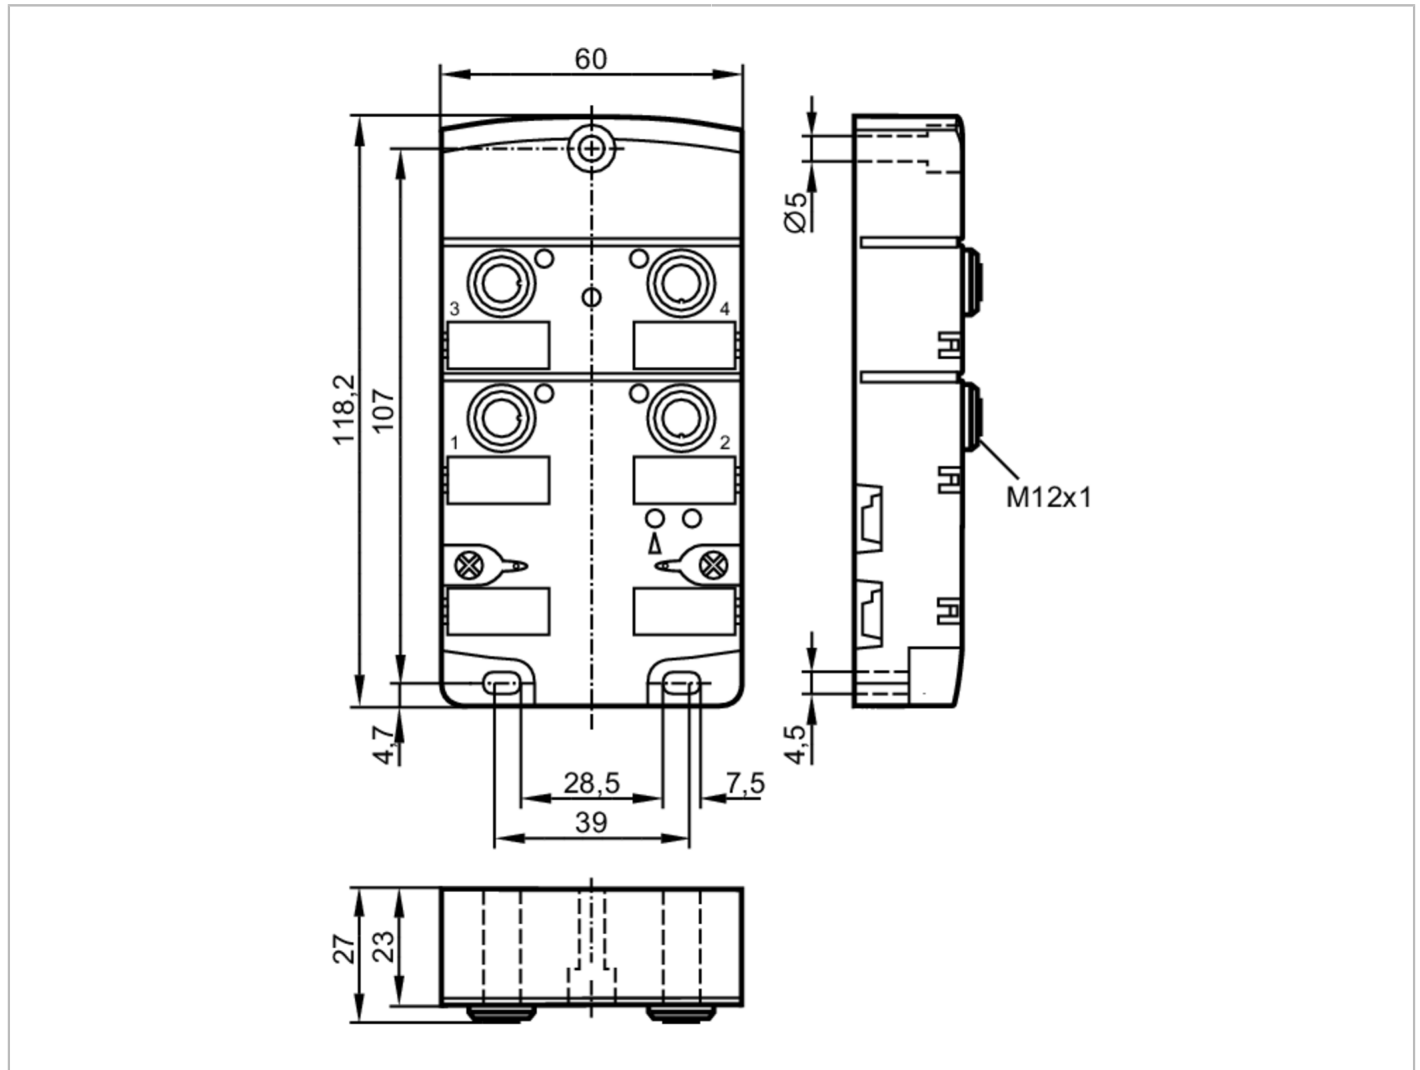

Application	
Application	field installation
Electrical data	
Operating voltage [V]	26.5...31.6 DC; (cULus - Class 2 source required)
Max. current consumption from AS-i [mA]	250
Inputs / outputs	
Number of inputs and outputs	Number of digital inputs: 4

AC2434



AS-Interface CompactLine module

CompactM12 4DI no IR

Inputs					
Number of digital inputs	4				
Input circuit of digital inputs	PNP				
Sensor supply of the inputs	AS-i				
Voltage supply [V]	20...30				
Max. total current rating of inputs [mA]	200				
Input current limitation [mA]	15				
Input current High [mA]	6...10				
Input current low [mA]	0...2				
Min. switching level high signal [V]	11				
Digital inputs protected against short circuits	yes				
Operating conditions					
Ambient temperature [°C]	-25...80				
Protection	IP 67; (when flat cables are used E7400x / E7401x)				
Tests / approvals					
EMC	EN 61000-6-2				
	EN 61000-6-3				
	EN 62026-2				
MTTF [years]	387				
AS-i classification					
AS-i version	2.11; 3.0				
Extended addressing mode	no				
AS-i profile	S-0.0.E				
AS-i I/O configuration [hex]	0				
AS-i ID code [hex]	0.E				
Data bits	Data bit	D0	D1	D2	D3
	Input	1	2	3	4
	Socket	I-1	I-2	I-3	I-4
	Pin	2+4	2+4	2+4	2+4
Mechanical data					
Weight [g]	298				
Type of mounting	AS-i flat cable connection				
Material	PA; Socket: brass nickel-plated; threaded inserts in the lower part: brass nickel-plated; O-ring: Viton; Piercing contacts: CuSn6 nickel-plated and tin-plated				
Displays / operating elements					
Display	Power	LED, green			
	errors	LED, red			
	Function	LED, yellow			
Accessories					
Items supplied	stainless steel sleeve for installation in case of high mechanical stress , E70402				

AC2434




AS-Interface CompactLine module

CompactM12 4DI no IR

Remarks	
Remarks	Do not connect any of the following points to an external potential: I-, I+, I1, I2, I3, I4
Pack quantity	The connections are electrically connected with the AS-i cable. 1 pcs.

Electrical connection

Connector: M12



Inputs	
1	Sensor supply L+
2+4	Data input 1 internally bridged
3	Sensor supply L-
5	functional earth