


AC2453



AS-Interface CompactLine module

CompactM12 4 SB V4A

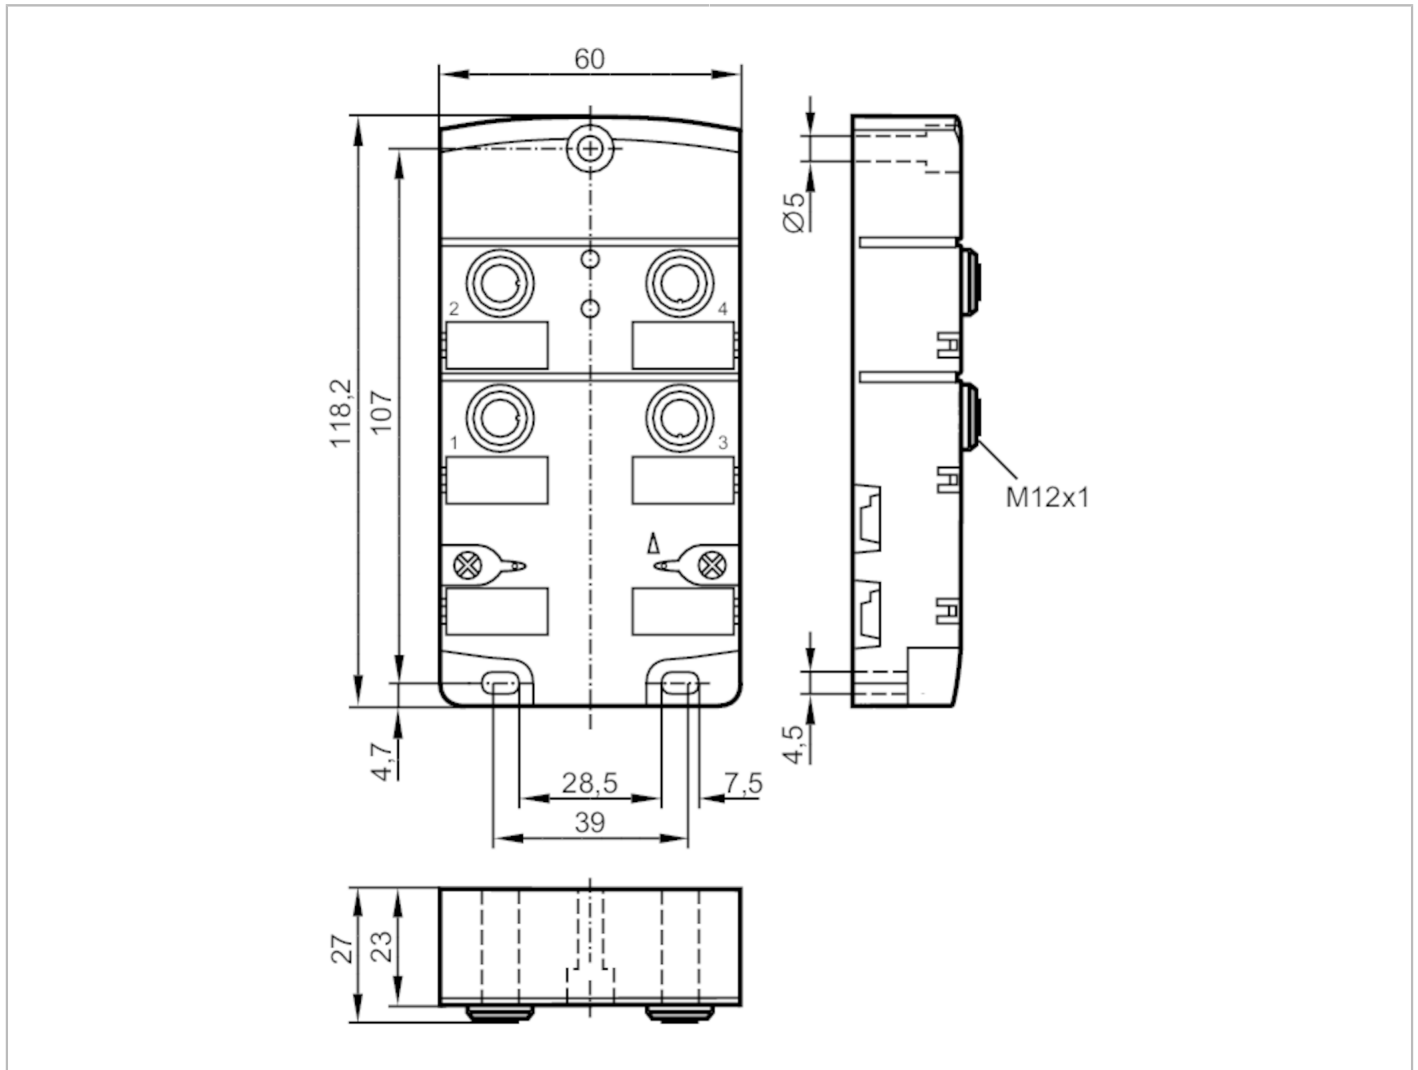

Application	
Application	field installation
Electrical data	
Operating voltage [V]	26.5...31.6 DC; ("supply class 2" to cULus)
Max. current load total [A]	4
Operating conditions	
Ambient temperature [°C]	-25...80
Protection	IP 67; (when flat cables are used E7400x / E7401x)
Tests / approvals	
EMC	EN 50295
Mechanical data	
Weight [g]	272
Type of mounting	AS-i flat cables directly connectable
Materials	PA 6.6; socket: stainless steel (1.4404 / 316L); threaded inserts in the lower part: stainless steel (1.4404 / 316L); O-ring: EPDM; piercing contacts: CuSn6 nickel-plated and tin-plated; screws stainless steel (1.4578 / 316Cu)

AC2453



AS-Interface CompactLine module

CompactM12 4 SB V4A

Accessories	
Accessories (optional)	Stainless steel sleeve, for installation in case of high mechanical stress , E70402
Remarks	
Pack quantity	1 pcs.
Electrical connection	
Connector: M12	
	
1	AS-i +
2	external voltage -
3	AS-i -
4	external voltage +
5	protective earth (FE)