




Evaluation unit for slip and synchronous monitoring

MONITOR/FS-2N/110-240VAC/DC

Article no longer available - archive entry

Alternative articles: DS2505

When selecting an alternative article and accessories please note that technical data may differ!

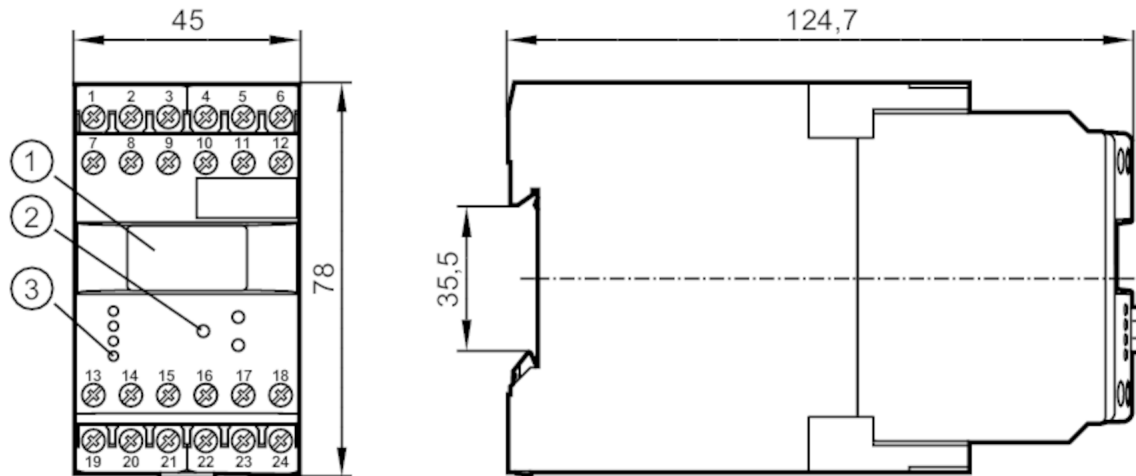

- 1 OLED display
- 2 programming buttons
- 3 LEDs



Product characteristics

Dimensions [mm] 78 x 45 x 124.7

Application

Application pulse evaluation system with microprocessor for slip and synchronous monitoring; evaluation of pulse differences

Electrical data

Nominal voltage AC	[V]	110...240
Nominal voltage DC	[V]	27
Nominal voltage tolerance	[%]	< 10
Nominal voltage tolerance 2	[%]	20...10
Nominal frequency AC	[Hz]	50...60
Power consumption	[W]	3
Auxiliary energy for sensors DC	[V]	8.2

Inputs / outputs

Number of inputs and outputs Number of relay outputs: 2

Outputs

Number of relay outputs	2
Contact rating	6 A (250 V AC); B300, R300

Measuring/setting range

Setting range Hz	[Hz]	0.1...1000
Setting range	[Imp/min]	1...60000

DS2605



Evaluation unit for slip and synchronous monitoring

MONITOR/FS-2N/110-240VAC/DC

Operating conditions		
Ambient temperature [°C]	-40...60	
Storage temperature [°C]	-40...85	
Max. relative air humidity [%]	80; (40 °C: 50 %)	
Protection	IP 50	
Protection rating terminals	IP 20	
Tests / approvals		
EMC	EN 61010	2011
	EMV 89/336/EWG	
	EN 61000-6-2	2005
	EN 61000-6-4	2007
Mechanical data		
Weight [g]	381.5	
Dimensions [mm]	78 x 45 x 124.7	
Materials	plastics	
Displays / operating elements		
Display		OLED display, 128 x 64 pixels luminous
	switching status	LED, green
Remarks		
Remarks	The unit complies with overvoltage category II; degree of soiling 2	



Evaluation unit for slip and synchronous monitoring

MONITOR/FS-2N/110-240VAC/DC

Electrical connection

dual-chamber terminals: 2 x ...2.5 mm²; AWG 14

1	DC supply voltage (L-)
2	DC supply voltage (L+)
3	supply transistor outputs (L+)
4	error output 1
5	8.2 V DC Sensor supply 1 (L-)
6	8.2 V DC Sensor supply 1 (L+)
7	AC supply voltage (L)
8	AC supply voltage (N)
9	not used
10	error output 2
11	8.2 V DC Sensor supply 2 (L-)
12	8.2 V DC Sensor supply 2 (L+)
13	relay 1 common
14	relay 1 normally open
15	relay 1 normally closed
16	stepping output 1
17	release 1/2 pnp
18	reset 1/2 pnp
19	relay 2 common
20	relay 2 normally open
21	relay 2 normally closed
22	not used
23	not used
24	stepping output 2