


DTI420



RFID read/write head HF

DTRHF GBRWIOUS03

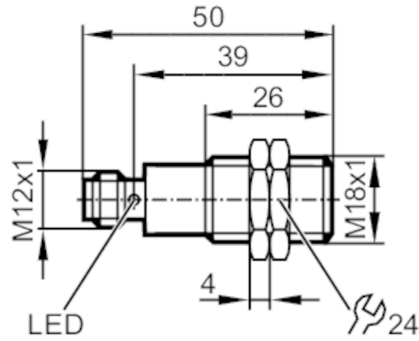

Application					
Application	detection of objects on transport equipment				
Radio approval for	EU; USA; Canada; Japan; Australia; China; Taiwan; India; Singapore				
Electrical data					
Operating voltage [V]	19.2...28.8 DC				
Current consumption [mA]	< 50				
Protection class	III				
Operating frequency [MHz]	13,56				
RFID standard	ISO 15693				
Detection zone					
Distance write/read head front [mm]	100				
Distance write/read head side [mm]	60				
Distance to the ID tag [mm]	referred to 30 mm coin tag; I-CODE SLI : ≤ 16				
Interfaces					
Communication interface	IO-Link				
Transmission type	COM2 (38,4 kBaud)				
IO-Link revision	1.1				
SDCI standard	IEC 61131-9				
Profiles	Smart Sensor: Device Identification				
SIO mode	no				
Required master port type	A				
Supported DeviceIDs	<table border="1"> <thead> <tr> <th>Type of operation</th> <th>DeviceID</th> </tr> </thead> <tbody> <tr> <td>Default</td> <td>967</td> </tr> </tbody> </table>	Type of operation	DeviceID	Default	967
Type of operation	DeviceID				
Default	967				
Operating conditions					
Ambient temperature [°C]	-20...60				
Storage temperature [°C]	-25...80				
Protection	IP 67; IP 69K				

DTI420



RFID read/write head HF

DTRHF GBRWIOUS03

Tests / approvals		
EMC	DIN EN 301489-3	
Shock resistance	EN 60068-2-27	40 g 6 ms / repetitive
	EN 60068-2-27	50 g 11 ms / not repetitive
Vibration resistance	EN 60068-2-6	20 g 10...2000 Hz
Radio approval	EN 300 330 V2.1.1	
UL approval	Ta	-20...60 °C
	Enclosure type	Type 1
	voltage supply	Limited Voltage/Current
	File number UL	E205959

Mechanical data		
Weight [g]	125.5	
Housing	cylindrical	
Mounting	flush mountable	
Dimensions [mm]	M18 x 1 / L = 50	
Thread designation	M18 x 1	
Materials	housing: stainless steel; Protective cover: PPS; LED window: PEI	

Displays / operating elements		
Display	operation	1 x LED, green
	tag communication	1 x LED, yellow

Remarks		
Pack quantity	1 pcs.	

Electrical connection

Connector: 1 x M12



DTI420



RFID read/write head HF

DTRHF GBRWIOUS03

Connection

