


DX2033



Multifunction display for monitoring revolution, speed and time

DISPLAY/FX460/PNP OUT/DC

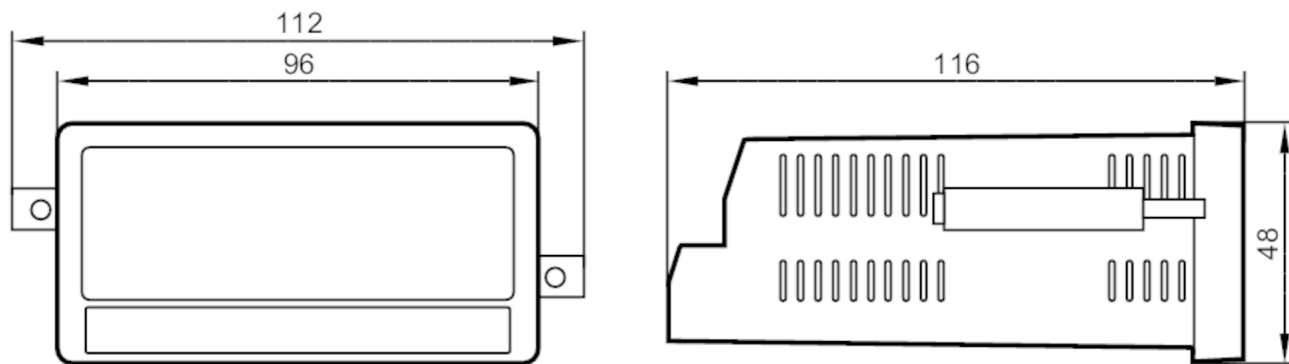

panel cutout 91 x 43 mm



Product characteristics

Dimensions [mm] 48 x 112 x 116

Application

Application universal evaluation and display for all physical units which can be derived from pulse sequences

Electrical data

Operating voltage [V] 18...30 DC

Current consumption [mA] 100

Inputs / outputs

Number of inputs and outputs Number of digital inputs: 2; Number of digital outputs: 4

Inputs

Number of digital inputs 2

Outputs

Number of digital outputs 4

Overload protection yes

Operating conditions

Ambient temperature [°C] -20...60

Storage temperature [°C] -25...70

Protection IP 65

Protection rating terminals IP 20

Tests / approvals

EMC EN 61000-6-2
EN 61000-6-3
EN 61000-6-4

Mechanical data

Weight [g] 299

Type of mounting panel cutout: 91 x 43 mm

Dimensions [mm] 48 x 112 x 116

Materials Noryl UL94-V-0

DX2033



Multifunction display for monitoring revolution, speed and time

DISPLAY/FX460/PNP OUT/DC


Displays / operating elements

Display	colour display	full graphic LCD display, touch screen
---------	----------------	--

Electrical connection

screw terminals:

Connection

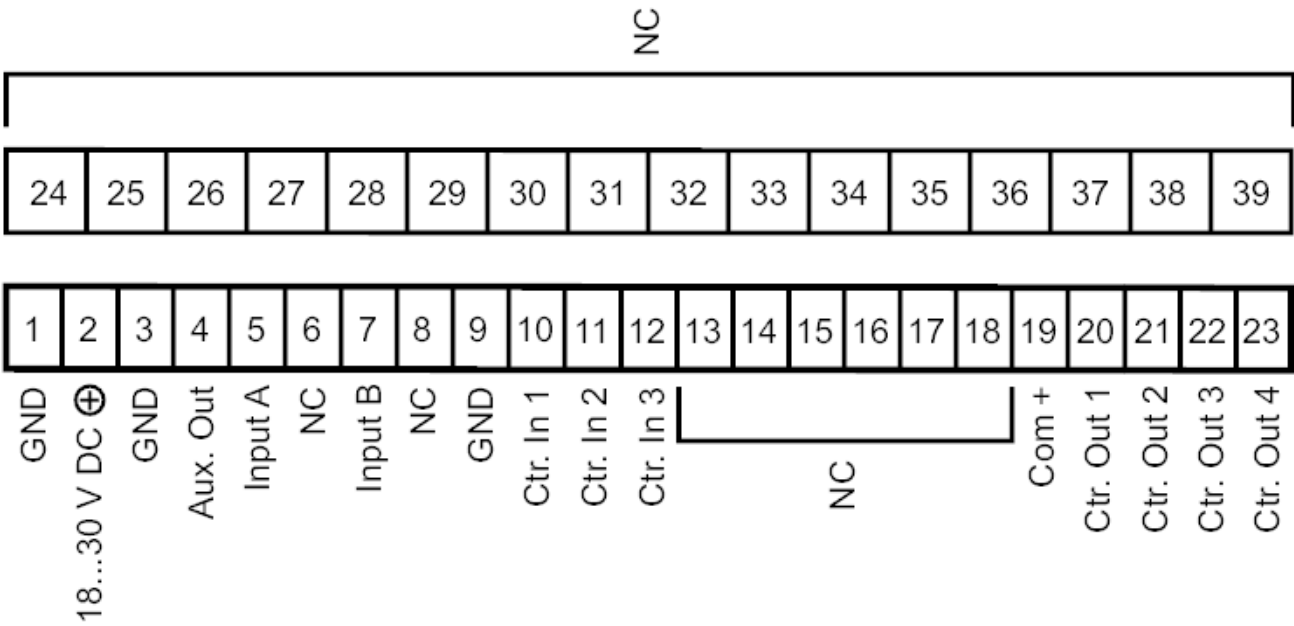

NC: not used