


E11226



Connecting cable with socket

ADOAO140MSS0005H10

Article no longer available - archive entry

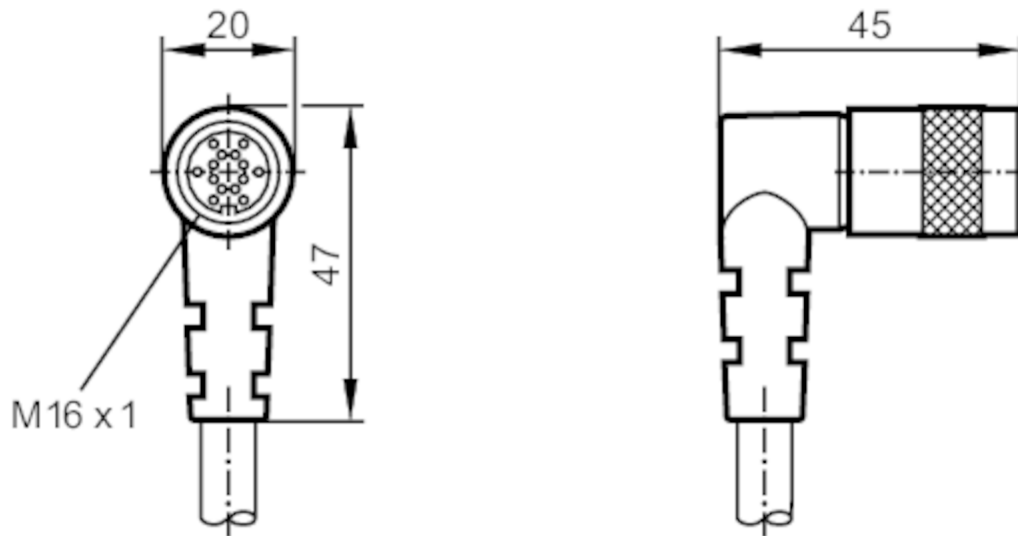

Application		
Special feature	Free from silicone; Halogen-free; Drag chain suitability	
Free from silicone	yes	
Electrical data		
Operating voltage [V]	< 30 DC	
Max. current load total [A]	3	
Operating conditions		
Ambient temperature [°C]	-25...80	
Protection	IP 67	
Mechanical data		
Weight [g]	579	
Dimensions [mm]	45 x 20 x 47	
Materials	PUR	
Moulded-body material	PUR	
Material nut	brass, nickel-plated	
Drag chain suitability	yes	
Drag chain suitability	bending radius for flexible use	min. 12.5 x cable diameter
	travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s ²
	torsional strain	± 180 °/m
Remarks		
Pack quantity	1 pcs.	

E11226



Connecting cable with socket


ADDAO140MSS0005H10

Electrical connection

Cable: 5 m, PUR, Halogen-free, black, \varnothing 9.2 mm; 8 x 0.34 mm² + 2 x 0.75 mm²

Electrical connection - socket

Connector: 1 x M16, angled; Moulded body: PUR; Locking: brass, nickel-plated




E11226



Connecting cable with socket

ADOAO140MSS0005H10

Connection

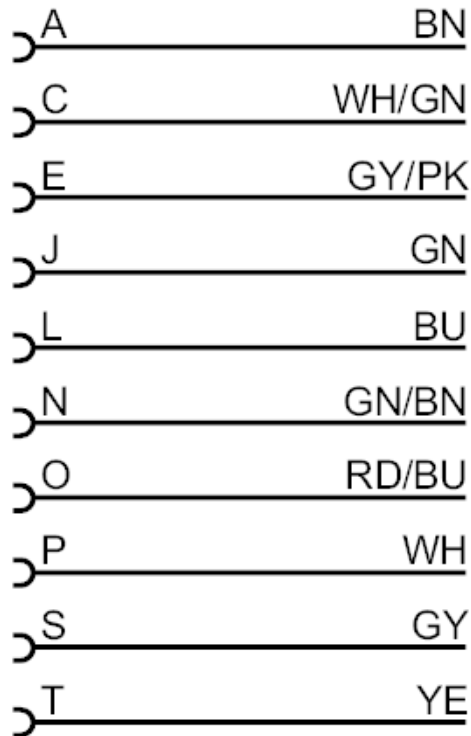

U: not used

R: not used

G: not used

M: not used

Core colours :

BN = brown

BU = blue

GN = green

GY = grey

PK = pink

RD = red

WH = white

YE = yellow