


E12090



Ethernet connection cable

VSTGN040ZDS0002L04STGP080--S

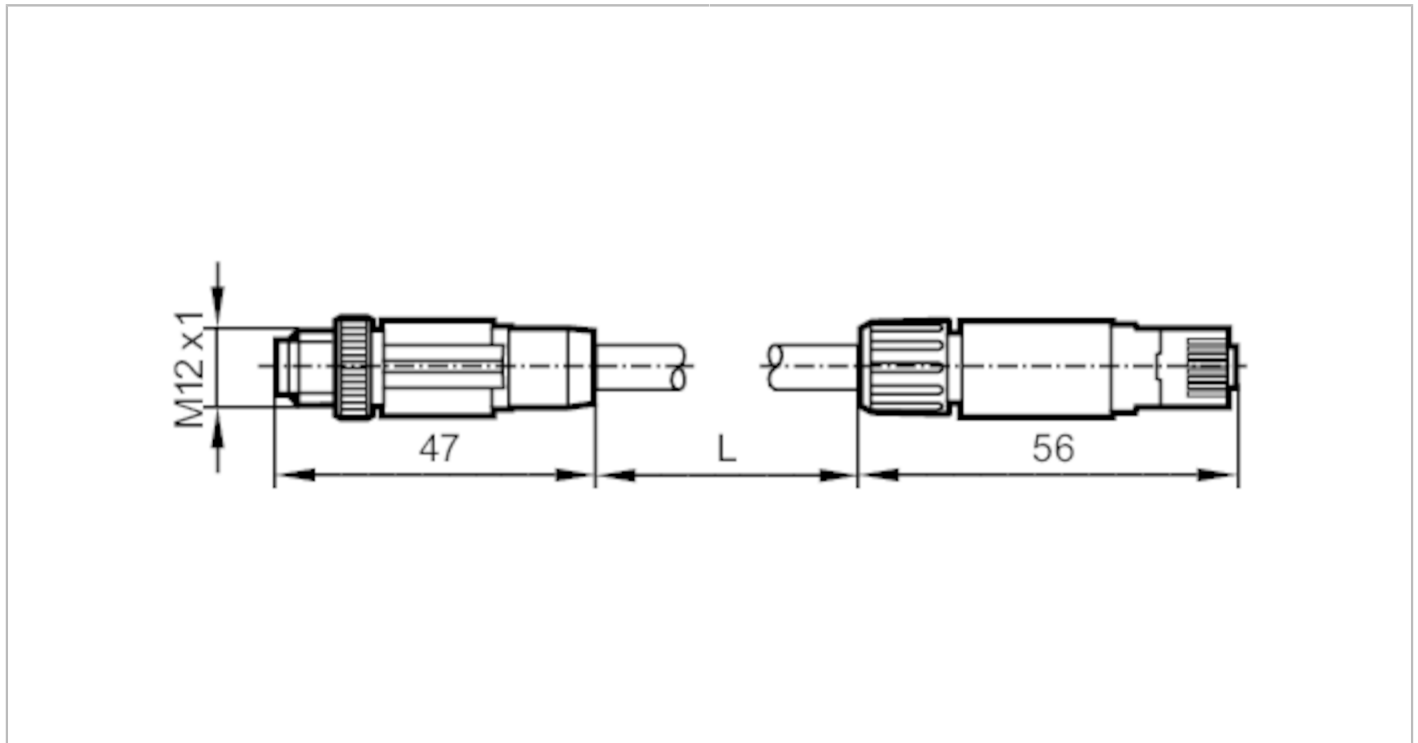

| Application | |
|--------------------------|--------------------------------------|
| Special feature | Screened cable |
| Design | Ethernet cable, D-coded |
| Application | cross-over patch cable; patch cable |
| Operating conditions | |
| Ambient temperature [°C] | -25...70 |
| Protection | IP 67; IP 20; (M12 plug / RJ45 plug) |
| Mechanical data | |
| Weight [g] | 166.7 |
| Materials | TPU / PA |
| Moulded-body material | PA / TPU |
| Material nut | diecast zinc, nickel-plated |
| Remarks | |
| Pack quantity | 1 pcs. |

Electrical connection - plug M12

Connector: 1 x M12, straight; Moulded body: PA; Locking: diecast zinc, nickel-plated; Tightening torque: 0.7...0.9 Nm



E12090




Ethernet connection cable

VSTGN040ZDS0002L04STGP080--S

Electrical connection

Cable: 2 m, PVC, green, Ø 6.5 mm, shielded; 2 x 2 x 0.38 mm²

Connection

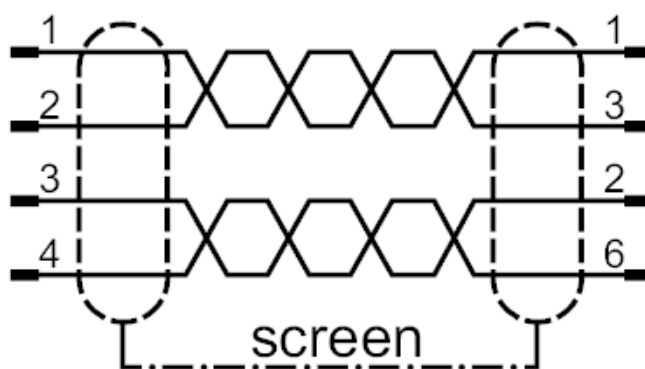

Electrical connection - plug RJ45

Connector: 1 x RJ45, straight; Moulded body: TPU

