


E12425



Connection cable

VDOGD040ZDS00,5H04STGD040ZDS

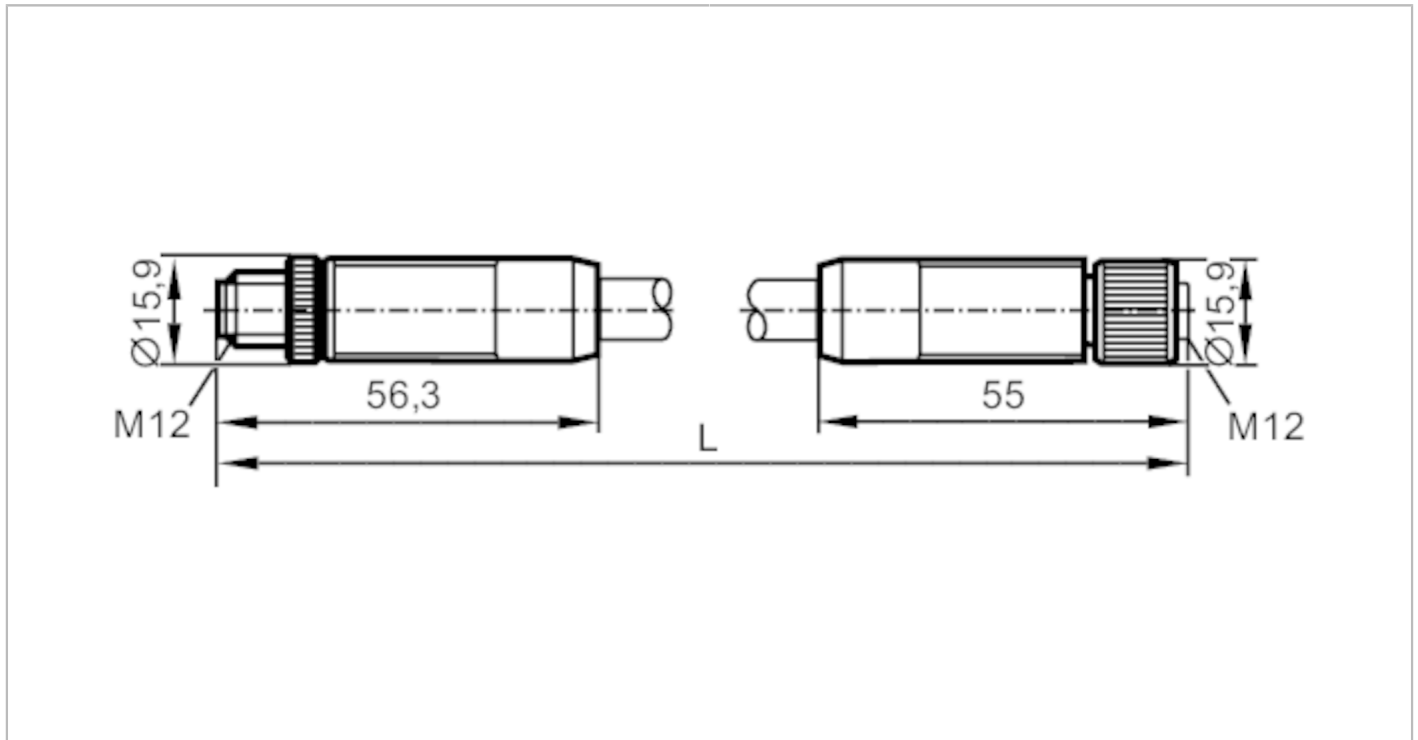

Application	
Special feature	Gold-plated contacts
Design	power cable, T-coded
Electrical data	
Operating voltage [V]	< 60 AC
Max. current load total [A]	12
Operating conditions	
Ambient temperature [°C]	-25...85
Protection	IP 67
Mechanical data	
Weight [g]	105.4
Dimensions [mm]	15.4 x 15.4 x 54.8
Materials	PUR
Moulded-body material	PUR / PUR
Material nut	diecast zinc, nickel-plated
Remarks	
Pack quantity	1 pcs.
Electrical connection - plug	
Connector: 1 x M12, straight; Moulded body: PUR; Locking: diecast zinc, nickel-plated; Contacts: gold-plated	

E12425



Connection cable


VDOGD040ZDS00,5H04STGD040ZDS



Electrical connection

Cable: 0.5 m, PUR, black; 4 x 1.5 mm²

Connection

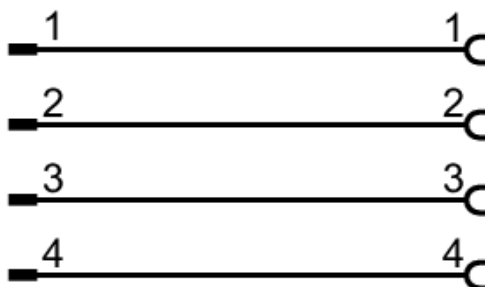

Electrical connection - socket

Connector: 1 x M12, straight; Moulded body: PUR

