


E12495



Connecting cable with socket

ADOGD040ZDS0005H04

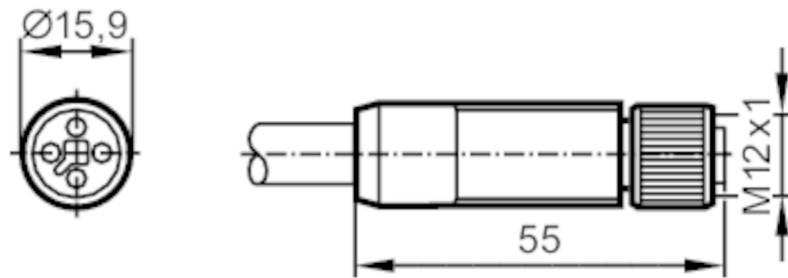

Application

Special feature	Gold-plated contacts
Design	power cable, T-coded

Electrical data

Operating voltage	[V]	< 60 AC
Max. current load total	[A]	12

Operating conditions

Ambient temperature	[°C]	-25...85
Protection		IP 67

Mechanical data

Weight	[g]	545
Dimensions	[mm]	15.4 x 15.4 x 52.8
Materials		PP
Moulded-body material		TPU
Material nut		diecast zinc, nickel-plated

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 5 m, PUR, black, Ø 8 mm; 4 x 1.5 mm²

Electrical connection - socket


Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated

E12495




Connecting cable with socket

ADOGD040ZDS0005H04



Connection

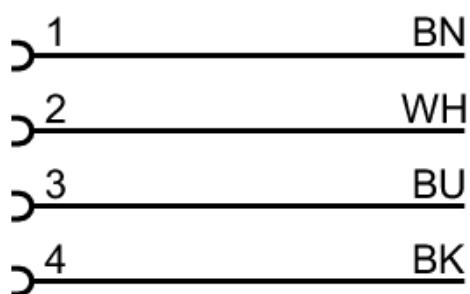

Core colours :

BK =	black
BN =	brown
BU =	blue
WH =	white