


# E12498



## Connecting cable with socket

ADOGD040ZDS0050H04

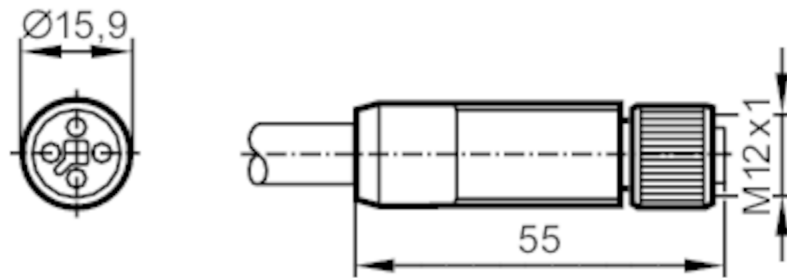

### Application

Special feature	Gold-plated contacts
Design	power cable, T-coded

### Electrical data

Operating voltage	[V]	< 60 AC
Max. current load total	[A]	12

### Operating conditions

Ambient temperature	[°C]	-25...85
Protection		IP 67

### Mechanical data

Weight	[g]	5233.5
Dimensions	[mm]	15.4 x 15.4 x 52.8
Materials		PP
Moulded-body material		TPU
Material nut		diecast zinc, nickel-plated

### Remarks

Pack quantity	1 pcs.
---------------	--------

### Electrical connection

Cable: 50 m, PUR, black, Ø 8 mm; 4 x 1.5 mm<sup>2</sup>

### Electrical connection - socket


Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated

# E12498




## Connecting cable with socket

ADOGD040ZDS0050H04



### Connection

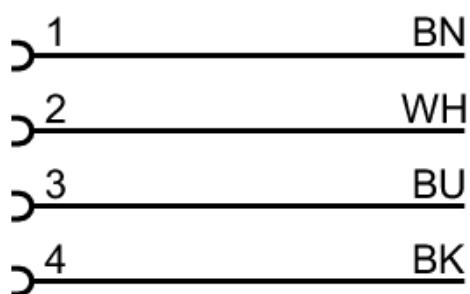

Core colours :

BK = black  
BN = brown  
BU = blue  
WH = white