


# E12510



## Connecting cable with plug

ASTGH040ZDS0002H04

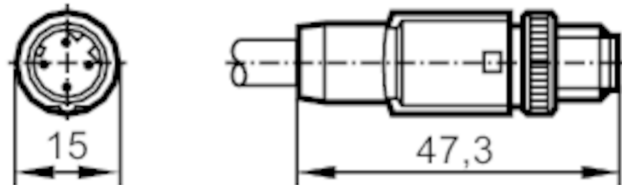

### Application

Special feature	Gold-plated contacts
Design	Ethernet cable, D-coded

### Electrical data

Operating voltage [V]	< 250 AC/DC
Max. current load total [A]	4

### Operating conditions

Ambient temperature [°C]	-40...70
Protection	IP 67

### Mechanical data

Weight [g]	151.5
Dimensions [mm]	15 x 15 x 47.3
Materials	TPU
Moulded-body material	TPU
Material nut	diecast zinc, nickel-plated

### Remarks

Pack quantity	1 pcs.
---------------	--------

### Electrical connection

Cable: 2 m, PVC, green, Ø 6.5 mm; 4 x 0.34 mm<sup>2</sup>

### Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: screen connected

# E12510




## Connecting cable with plug

ASTGH040ZDS0002H04



### Connection

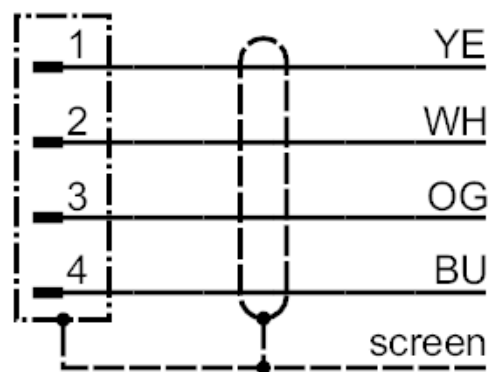

Core colours :

BU =

blue

OG =

orange

WH =

white

YE =

yellow