




Fibre optic diffuse reflection sensor

FT-30-P-A-R8

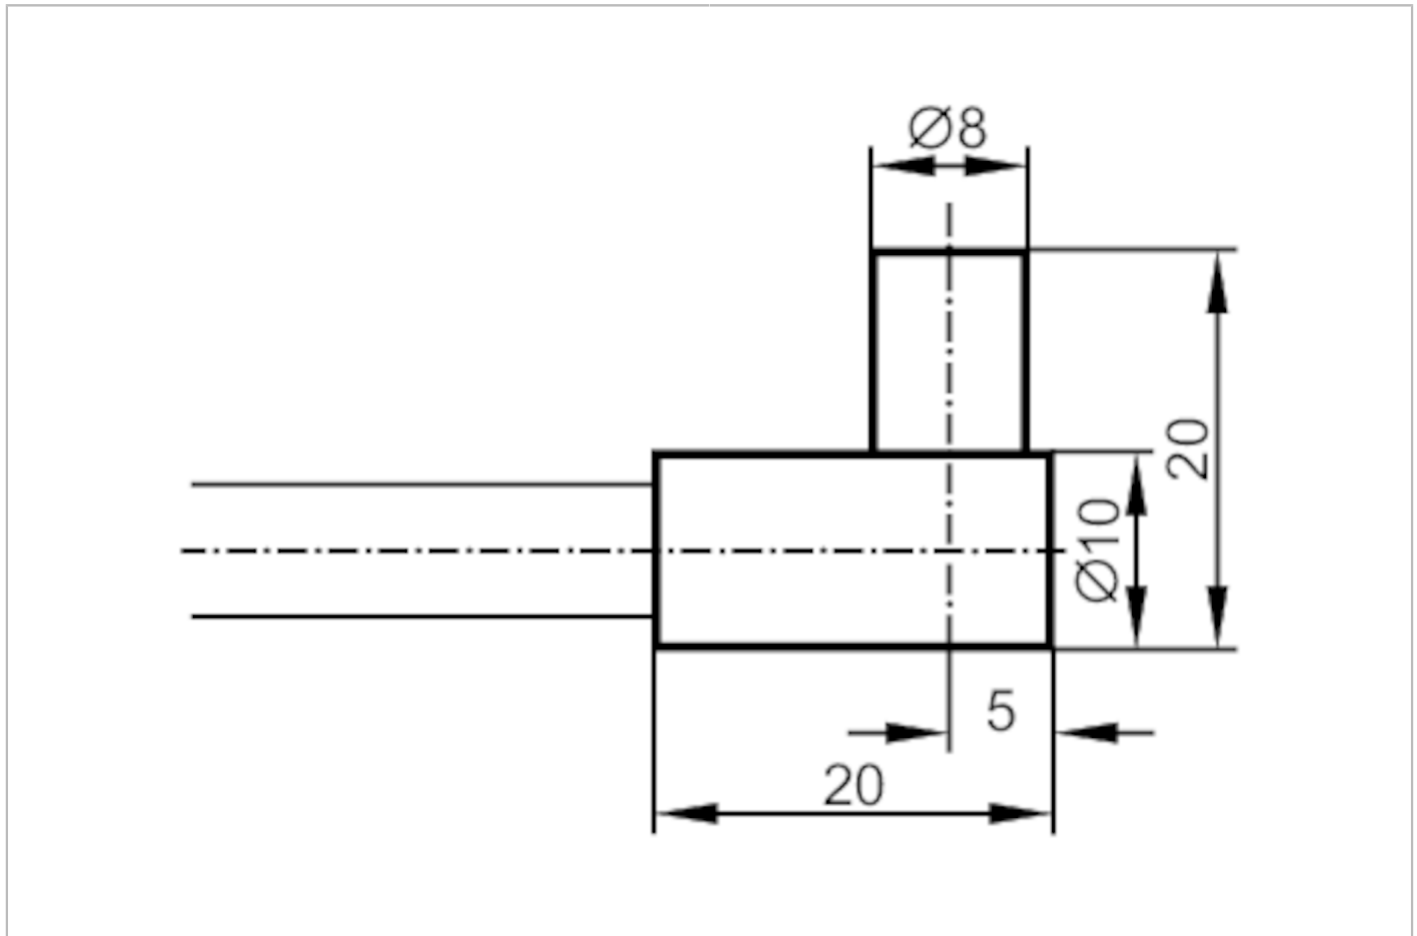

Application	
Function principle	Diffuse reflection sensor
Detection zone	
Range with fibre optic amplifier type	OIF
OIF	
Range fibre optics [mm]	70
Operating conditions	
Ambient temperature [°C]	-20...80
Mechanical data	
Weight [g]	91
Version of sensing head	angled
Sensing head diameter [mm]	8
Total length [mm]	600
Min. bending radius [mm]	30
Fibre arrangement	⊙
Materials	Adapter: PA
Fibre material	glass
Fibre head material	aluminium
Fibre sheath material	PVC

E20157



Fibre optic diffuse reflection sensor

FT-30-P-A-R8

Accessories	
Items supplied	E20353
Remarks	
Pack quantity	1 pcs.