




Fibre optic through-beam sensor

FE-30-P-A-M6

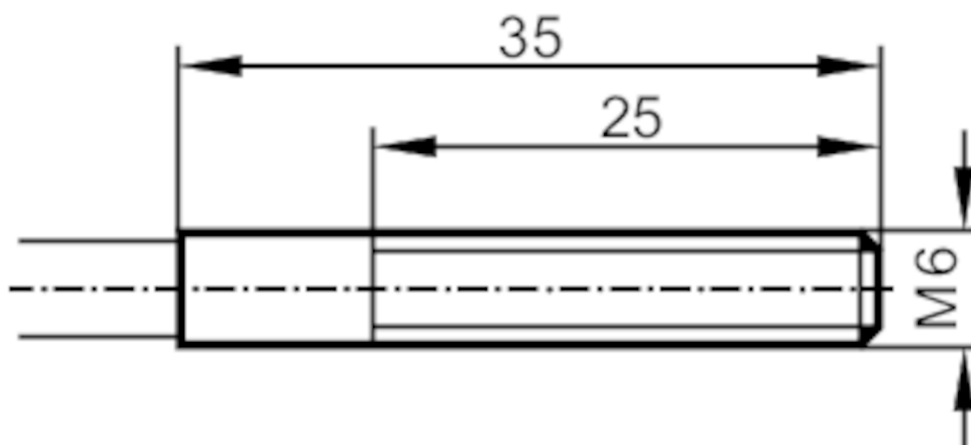

Application		
Function principle		Through-beam sensor
Detection zone		
Range with fibre optic amplifier type		OIF
OIF		
Range of fibre optics	[mm]	300
Operating conditions		
Ambient temperature	[°C]	-20...80

E20164



Fibre optic through-beam sensor

FE-30-P-A-M6

Mechanical data	
Weight [g]	98.5
Version of sensing head	straight
Sensing head thread	M6
Sensing head length [mm]	35
Total length [mm]	600
Min. bending radius [mm]	30
Fibre arrangement	
Materials	Adapter: PA
Fibre material	glass
Fibre head material	aluminium
Fibre sheath material	PVC
Accessories	
Items supplied	hexagon nuts: 4 x M6, stainless steel
	tooth lock washers: 4
	knurled nut: 1 x M30
Remarks	
Pack quantity	1 pcs.