


E20199



Fibre optic diffuse reflection sensor

FT-00-R3

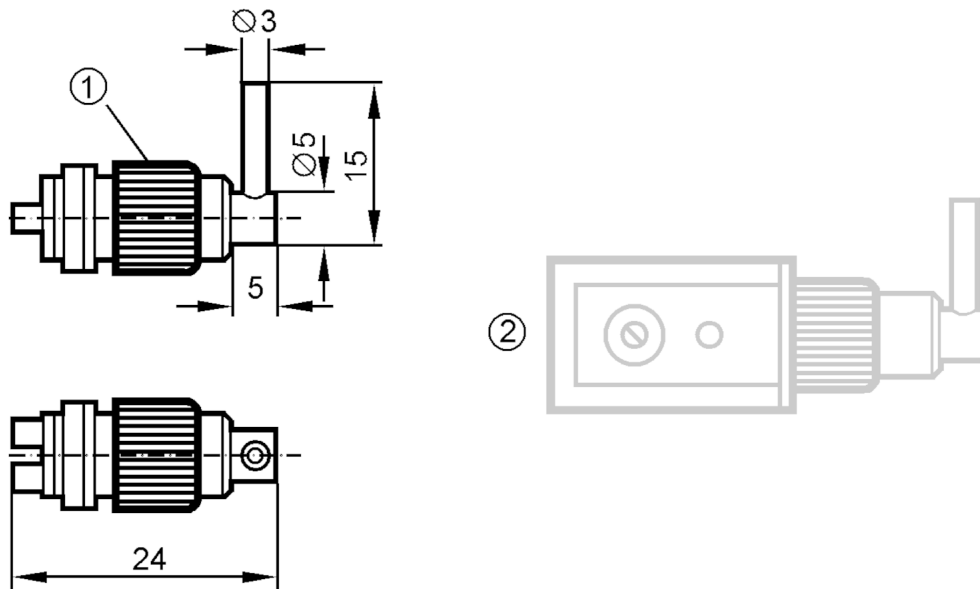

- 1 Lock nut
- 2 OKF with fibre optic

Application

Function principle Diffuse reflection sensor

Detection zone

Range with fibre optic amplifier type OKF

OKF

Range fibre optics [mm] 25

Operating conditions

Ambient temperature [°C] -20...80

Mechanical data

Weight [g] 14.5

Version of sensing head angled; with adapter for direct mounting

Total length [mm] 24

Fibre arrangement

Materials Lock nut: plastics

Fibre material glass

Fibre head material stainless steel (1.4305 / 303)

Remarks

Pack quantity 1 pcs.