


E20810



Fibre optic through-beam sensor

FE-00-M-V-R3/5M

Article no longer available - archive entry

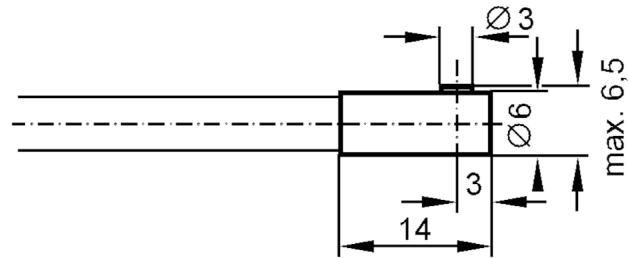

Application

Function principle Through-beam sensor

Detection zone

Range with fibre optic amplifier type OKF; OUF

OKF

Range of fibre optics [mm] 50

OUF

Range of fibre optics [mm] 50

Operating conditions

Ambient temperature [°C] -20...80

Mechanical data

Weight [g] 0.001

Total length [mm] 5000

Min. bending radius [mm] 20

Fibre arrangement

Fibre head material stainless steel (1.4305 / 303)

Fibre sheath material metal silicone

Accessories

Items supplied E20103