


# E21137



## Ethernet connection cable

VSTGN040ZDS0010L04STGN04ZDS

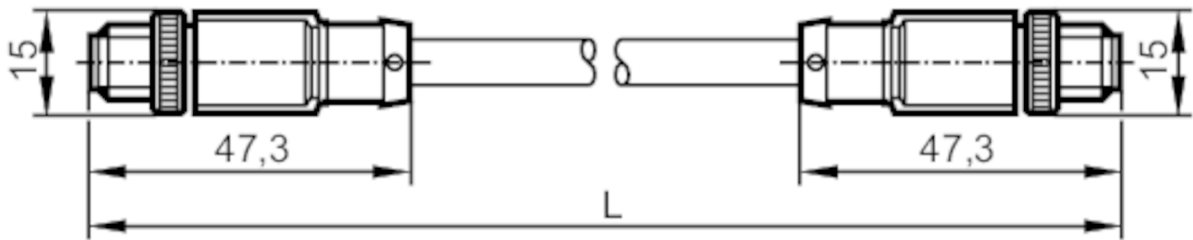

### Application

Special feature	Gold-plated contacts; Screened cable
Design	Ethernet cable, D-coded

### Electrical data

Operating voltage [V]	< 50 AC / < 60 DC
Protection class	III
Max. current load total [A]	4

### Operating conditions

Ambient temperature [°C]	-20...90
Protection	IP 67

### Mechanical data

Weight [g]	687
Dimensions [mm]	15 x 15 x 47.3
Materials	TPU
Moulded-body material	TPU / TPU
Material nut	diecast zinc, nickel-plated / diecast zinc, nickel-plated

### Remarks

Pack quantity	1 pcs.
---------------	--------

### Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: screen connected

# E21137



## Ethernet connection cable


VSTGN040ZDS0010L04STGN04ZDS



### Electrical connection

Cable: 10 m, PVC, green, shielded; 4 x 0.34 mm<sup>2</sup>

### Connection

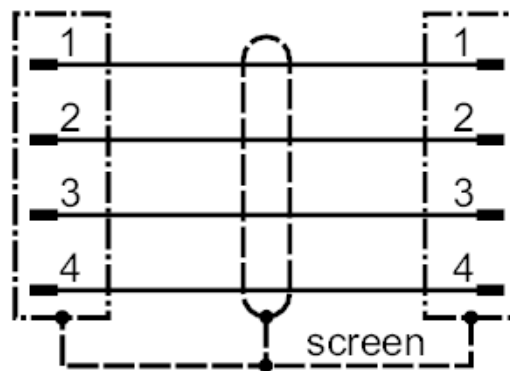

### Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: screen connected

