


E21154



Fibre optic diffuse reflection sensor

FT-00-M-W-M6/3M

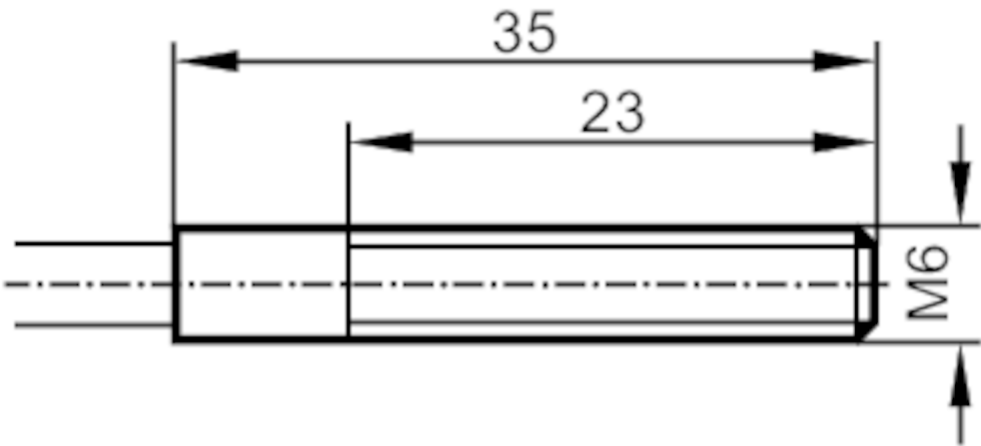

Application		
Function principle	Diffuse reflection sensor	
Detection zone		
Range with fibre optic amplifier type	OKF	
OKF		
Range fibre optics	[mm]	22
Operating conditions		
Ambient temperature	[°C]	-40...150



Fibre optic diffuse reflection sensor

FT-00-M-W-M6/3M

Mechanical data		
Weight	[g]	174.5
Version of sensing head		straight
Sensing head thread		M6
Sensing head length	[mm]	35
Total length	[mm]	3000
Min. bending radius	[mm]	45
Fibre arrangement		⊙
Core diameter	[mm]	1.6
Fibre diameter	[mm]	0.05
External diameter	[mm]	5.4
Fibre material		glass
Fibre head material		stainless steel (1.4571/316Ti)
Fibre sheath material		metal silicone
Remarks		
Pack quantity		1 pcs.