


# E2M202



## Adapter cables for cameras with video output

CONNECTION CABLE M16 3M

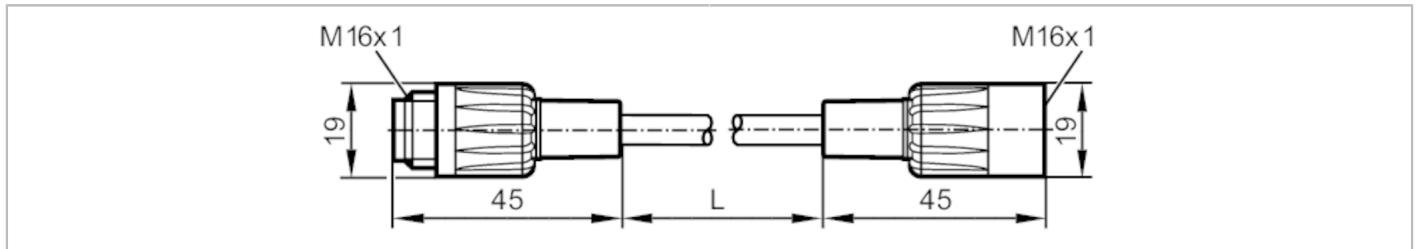

### Application

Special feature	Free from silicone; Gold-plated contacts
Design	camera with video output O2M20x
Free from silicone	yes

### Electrical data

Operating voltage [V]	< 60 DC
Protection class	II
Max. current load total [A]	4

### Operating conditions

Ambient temperature [°C]	-45...85
Protection	IP 67

### Mechanical data

Weight [g]	191.9
Materials	housing: PVC; Sealing: EPDM
Material nut	PVC / PVC

### Remarks

Pack quantity	1 pcs.
---------------	--------

### Electrical connection

Cable: 3 m, PVC, black, Ø 6 mm; 3 x 0.34 mm<sup>2</sup> / AWG 22 + 1 x 0.11 mm<sup>2</sup> / AWG 26

### Electrical connection - plug

Connector: 1 x M16, straight; Locking: PVC; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm






## Adapter cables for cameras with video output

CONNECTION CABLE M16 3M

### Electrical connection

#### Connection

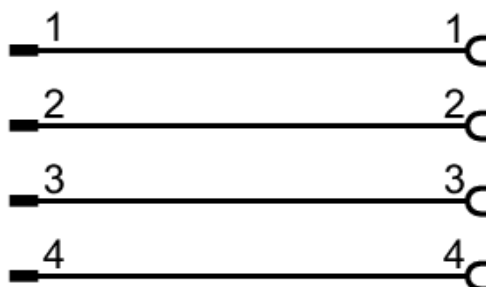

### Electrical connection - socket

Connector: 1 x M16, straight; Locking: PVC; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm

