


# E2M250



## MultiViewBox

MULTIVIEWBOX/4 PORT

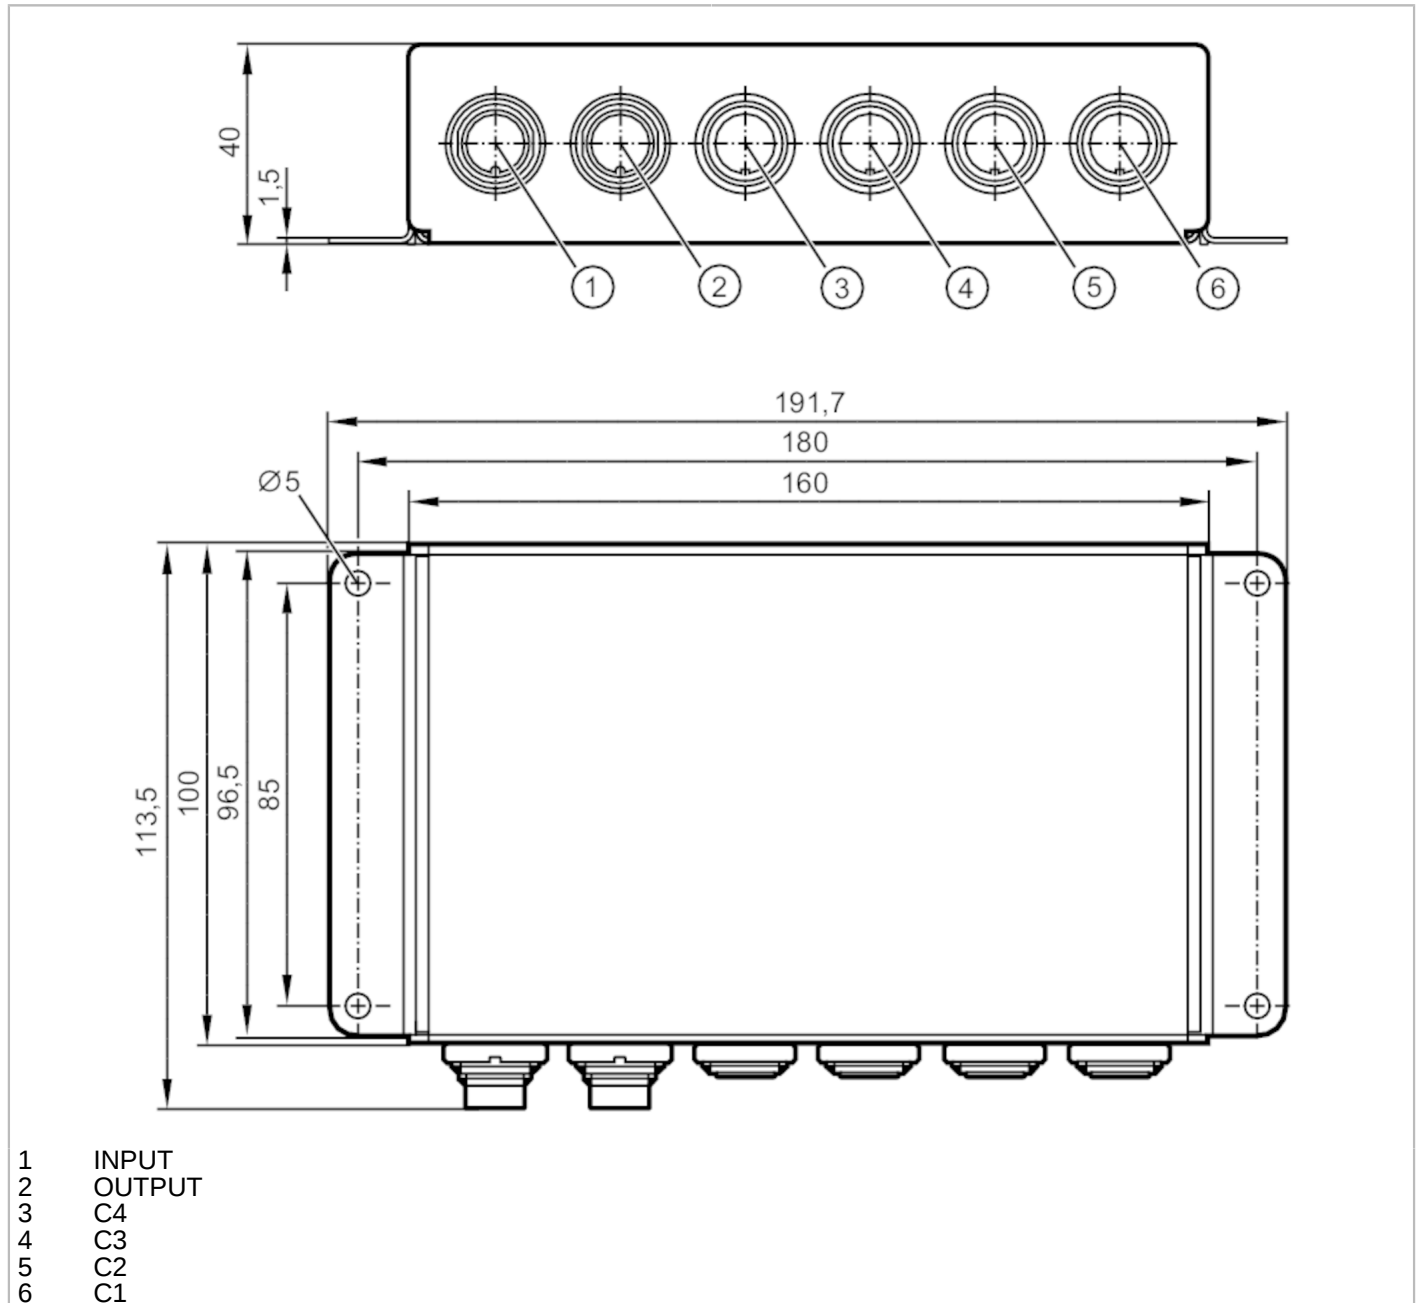

### Product characteristics

Image resolution [px] 680 x 480

### Electrical data

Operating voltage [V] 10...32 DC

Current consumption [mA] < 770

Overvoltage protection yes

### Detection zone

Image resolution [px] 680 x 480

# E2M250



## MultiViewBox

MULTIVIEWBOX/4 PORT

Operating conditions		
Ambient temperature	[°C]	-40...85
Storage temperature	[°C]	-40...125
Storage humidity	[%]	< 75; (relative humidity)
Shelf life	[MON]	24
Protection		IP 67; (ISO 20653)

Tests / approvals		
EMC	DIN EN 61000-6-4	industrial environments
	DIN EN 61000-6-2	industrial environments
Shock resistance		50 g
Vibration resistance	Frequency range 24...2000 Hz	
	(15.3 x 9.81 m/s <sup>2</sup> )rms	PSD (g <sup>2</sup> /Hz)
	0.04...0.1	

Mechanical data		
Weight	[g]	1569.5
Materials		housing: stainless steel (1.4401 / 316)

Accessories	
Items supplied	Protective covers

Remarks	
Pack quantity	1 pcs.

### Electrical connection - ..C4


Connector: 4 x M16



- |   |                              |
|---|------------------------------|
| 1 | coax cable core video signal |
| 2 | coax screen video GND        |
| 3 | U+                           |
| 4 | 0 V                          |

### Electrical connection - INPUT

Connector: 1 x M16



# E2M250



## MultiViewBox

MULTIVIEWBOX/4 PORT

1	U+
2	0 V
3	input 1
4	input 2
5	input 3
6	input 4
7	not used
8	not used

### Electrical connection - OUTPUT

Connector: 1 x M16



1	coax cable core video signal
2	coax screen video GND
3	not used
4	not used