


# E43332



## Connection cable

CABLE CAN ADAPTER

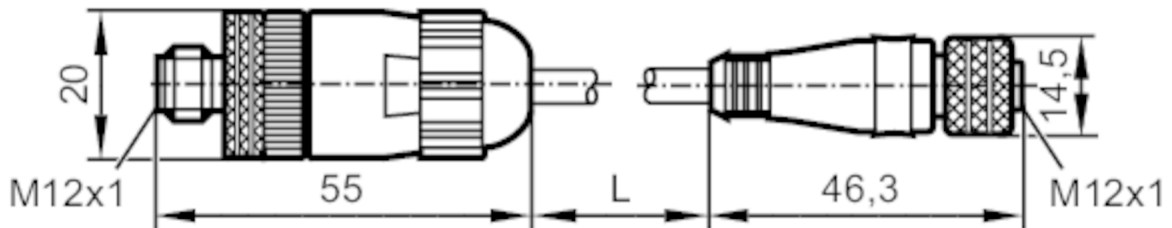

L: 0.15 m

### Application

Special feature	Gold-plated contacts
Design	CAN adapter cable

### Electrical data

Operating voltage	[V]	< 30 AC / < 36 DC
Max. current load total	[A]	4

### Operating conditions

Ambient temperature	[°C]	-30...80
Protection		IP 68

### Mechanical data

Weight	[g]	48.8
Dimensions	[mm]	20 x 20 x 55
Materials		PUR
Moulded-body material		PUR / PUR
Material nut		brass, nickel-plated / brass, nickel-plated

### Remarks

Pack quantity		1 pcs.
---------------	--	--------

### Electrical connection - plug


Connector: 1 x M12, straight; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated

# E43332



## Connection cable


CABLE CAN ADAPTER



### Electrical connection

Cable: 0.15 m, PUR / PVC, black, Ø 6.8 mm; 4 x 0.25 mm<sup>2</sup>

### Connection

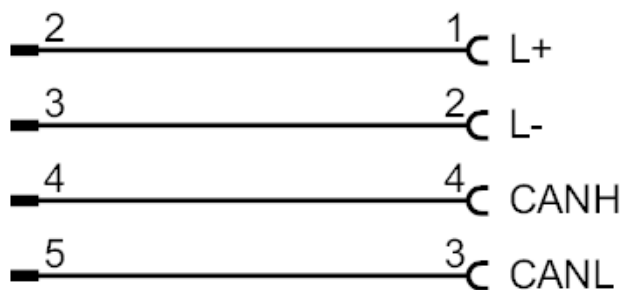

### Electrical connection - socket

Connector: 1 x M12, straight; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated

