


E43334



Coaxial pipe for level sensors

LR COAX TUBE G3/4 L1200 SLOTTED

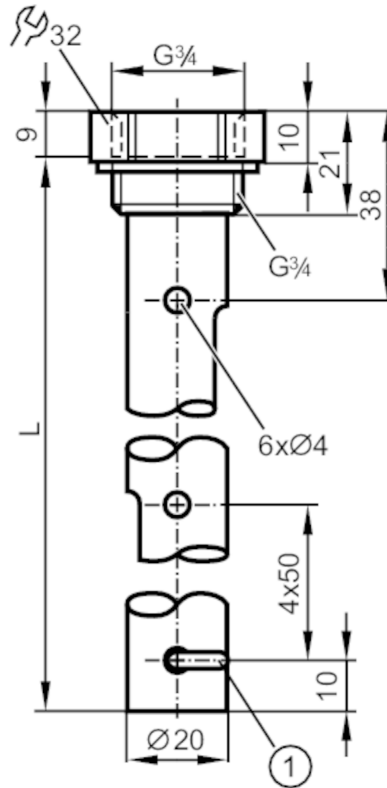

1 fixing bracket for centring piece

CRN

| Application | |
|--|---|
| Design | slotted design, for level sensors, LR |
| Medium temperature [°C] | -40...200 |
| Pressure rating [bar] | 16 |
| Vacuum resistance [mbar] | -1000 |
| MAWP (for applications according to CRN) [bar] | 16 |
| Mechanical data | |
| Weight [g] | 620 |
| Materials | Coaxial pipe: stainless steel (1.4301 / 304); Sealing: NBR reinforced fibre; Centring piece: PPS reinforced fibre; fixing bracket: stainless steel (1.4310 / 301) |
| Sensor connection | G 3/4 |
| Process connection | G 3/4 |
| Length [mm] | 1200 |
| Accessories | |
| Items supplied | Sealing: 1 |
| Accessories (optional) | Centring piece for coaxial pipes: 1, E43222 |
| Remarks | |
| Remarks | When used under DNV GL conditions mounting of an additional centring piece is required |
| Pack quantity | 1 pcs. |