


E80349



RFID tag

ID-TAG/20X3/06-16KBit

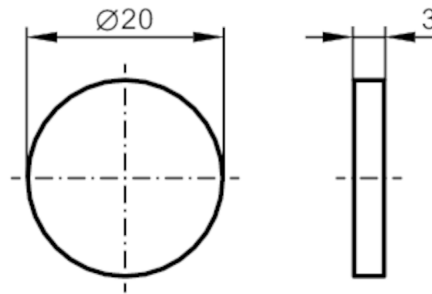

Application

Application coding of workpiece carriers in routing conveyors

Electrical data

Operating frequency [MHz]	13,56
Memory size [bit]	16000
Memory type	FRAM
Chip type	MB89R118C
Number of blocks	250
Block size [Byte]	8
Unique Identification Number (UID) [Byte]	8
RFID standard	ISO 15693
Max. read cycles	unlimited
Max. write cycles	unlimited

Operating conditions

Ambient temperature [°C]	-25...85
Storage temperature [°C]	-40...85
Protection	IP 68

Tests / approvals

Shock resistance	DIN IEC 68-2-27	40 g 18 ms
Vibration resistance	DIN IEC 68-2-6	10 g 10...2000 Hz

Mechanical data

Weight [g]	8.5
Dimensions [mm]	Ø 20 / L = 3
Materials	PPA

Remarks

Pack quantity 5 pcs.

E80349



RFID tag

ID-TAG/20X3/06-16KBit

Other data

read distance (mm)

ANT410 / DTI410	10
ANT411 / DTI411	15
ANT420 / DTI420 / DTM424 / DTI424 / DTM426	10
ANT421 / DTI421 / DTM425 / DTI425 / DTM427	30
ANT430 / DTI430 / DTM434 / DTI434 / DTM436	25
ANT431 / DTI431 / DTM435 / DTI435 / DTM437	35
ANT513 / DTI513 / DTC510	50
ANT515 / DTI515 / ANT516 / DTI516	25
ANT600 / DTI600	-